POPULAR SCIENCE

FOUNDED MONTHLY 1872

APRIL • 1931

25 CENTS

AMAZING BOAT TRAVELS ON WATER OR LAND

SEE PAGE 70

Manufactured and guaranteed by National Carbon Company, Inc. General Offices: New York, N. Y. Other Eveready products are Eveready Raytheon 4-pillar Tubes, Eveready Hot-Shot Batteries, Eveready Prestone (anti-freeze), and Eveready Mazda Miniature Lamps. Unit of Union Carbide and Carbon Corporation.

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 8.

For more than thirty years, Cadillac has striven constantly to build as finely as it is possible to build. Throughout all this time, no effort has been withheld if it offered so much as promise of a finer, more desirable Cadillac. This constant striving for perfection has brought to Cadillac an unusual record of achievement, but never has it borne such fruit as in today's distinguished Cadillac family.

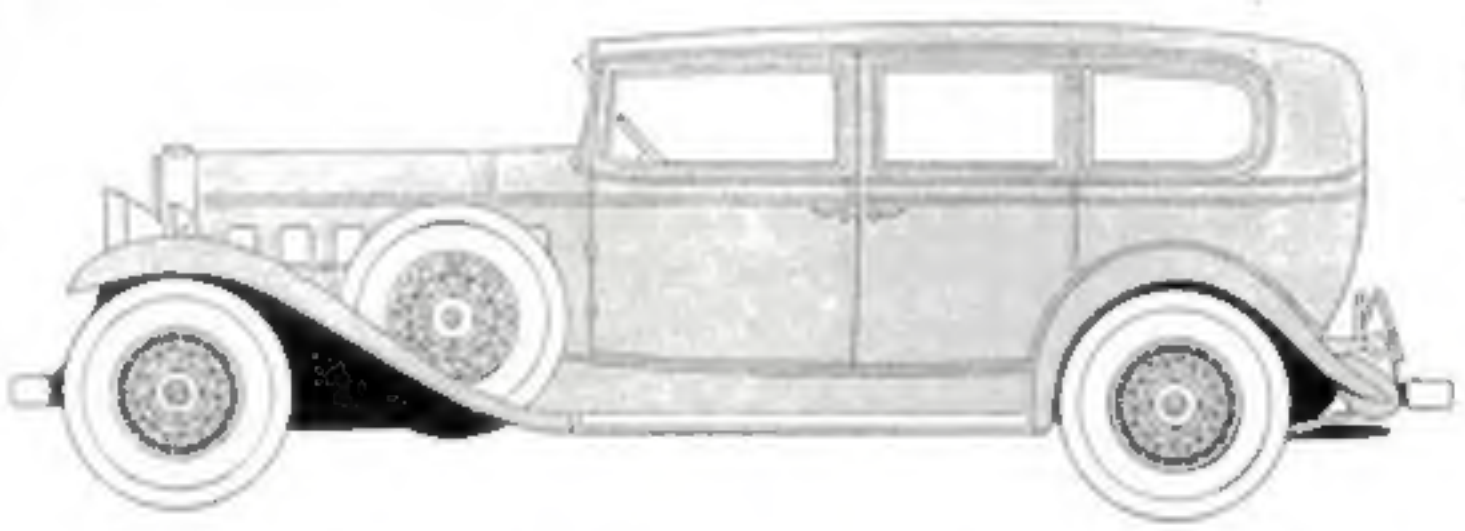

From every standpoint, the new Cadillac V-8 is a more luxurious creation than even the most illustrious of its predecessors. To its new beauty and styling has been added remarkable new brilliance of performance. And its economy of operation sets an entirely new standard for a truly fine automobile. Price range $2895 to $3795, f. o. b. Detroit. Shown above is the V-8 7-passenger Imperial. Coachwork by Fisher and Fleetwood. The liberal G. M. A. C. payment plan is recommended to all purchasers.

CADILLAC MOTOR CAR COMPANY, DETROIT, MICHIGAN
Division of General Motors

CADILLAC V-8

Copyrighted material

25 Cents a Copy
$2.50 a Year

POPULAR SCIENCE MONTHLY

381 Fourth Avenue
New York, N. Y.

Table of Contents for April, 1931

LEADING ARTICLES

SPECIAL FEATURES

ASTRONOMY

AUTOMOBILES

AVIATION

April, 1931, Vol. 114, No. 4. **Popular Science Monthly** is published monthly at 381 Fourth Avenue, New York, N. Y., by the Popular Science Publishing Co., Inc. Entered as second-class matter Dec. 29, 1916, at the Post Office at New York under the act of March 3, 1879; additional entry as second-class matter at Dayton, Ohio. Entered as second-class matter at the Post Office Department, Canada. Printed in U. S. A. Copyright, 1931, by the Popular Science Publishing Co., Inc. Single copy, 25 cents. Nine months' subscription, $2. Yearly subscriptions to United States, its possessions, and Canada, $2.50; foreign countries, $3. The contents of this magazine must not be reprinted without permission. The editors are not responsible for unsolicited contributions, and cannot guarantee the return of such material or insure against its loss. In presenting numerous stories of the new products of applied science, **Popular Science Monthly** does not underwrite the business methods of the individuals or companies producing them. The use of **Popular Science Monthly** articles for stock-selling schemes is never authorized. A. L. Cole, President and Treasurer; R. C. Wilson, Vice-President; John Nichols, Vice-President; F. W. Briggs, Secretary.

Popular Science Monthly for April, 1931

ENGINEERING

MODELS

NATURE

NEW DEVICES FOR THE HOME

NEW PROCESSES AND INVENTIONS

PHOTOGRAPHY

RADIO

UNUSUAL FACTS AND IDEAS

FOR THE HOME OWNER

WOODWORKING

IDEAS FOR THE HANDY MAN

HINTS FOR THE MECHANIC

Retire in 15 years

on your Present living Budget

by investing in safe 6½% First Mortgage Bonds

Follow the plan given **in the new edition of this famous book,** and win financial independence. The plan works just as surely whether you are now earning $1,000 or $100,000 a year.

The way is definite—each step plainly indicated and independent of luck, business genius or speculation.

Every fact has been harvested out of the 49 years' experience of Cochran & McCluer in the first mortgage investment banking business.

The plan is so simple any one can understand it—so practical and certain that anyone may follow it to success.

In addition to the Financial Independence Plan and the unique budget schedule, the book gives suggestions that enable you to enjoy more of the good things of life, both while building your independent fortune and after you have attained it.

We invite the most skeptical to read this plain, straightforward, interesting book. Phone, call or send coupon. We employ no salesmen, therefore none will call.

MAIL THIS FOR

NEW EDITION

6½%

Mail this

Cochran & McCluer Co. PSM 8-31
46 N. Dearborn St., Chicago

Please send me, without obligation, a copy of the new edition of your famous book, "How to Retire in 15 Years." (No salesmen will call.)

Name .....

Street .....

City ..... State .....

Cochran & McCluer Co.
Established 1881
46 North Dearborn St., Chicago, Ill.

This Book Has Helped Thousands to Success
The Real Estate Educator

The New Revised Edition, contains Questions and Answers; Brokers' License Law; Dictionary of Words and Phrases in Real Estate and Construction; How to Appraise Property; Law of Real Estate; How to Advertise Real Estate; Legal Forms; Commissions to Agents; "Don'ts" in Contracts, etc. 288 pages. Cloth. Postpaid $2.00.

The Popular Science Monthly
381 - 4th Ave. New York

Why Some Investment Trusts Are Safer Than Others

By LEON MEADOW, *Financial Editor*

IT WAS just a few minutes after noon and the restaurant was very crowded. Charlie Parker, looking around for an empty table, spied a familiar face over in a corner of the room. He started down an aisle, threading his way between the closely spaced tables.

"Well, if it isn't Bob Travers! Thought I recognized that face."

The man raised his eyes from the menu he was reading at the moment, and a look of surprise crossed his face. "As I live—old Charlie Parker. Sit down, boy . . . certainly is good to see you after all these years."

Parker sat down, and the two men, strangers since their school days, began to exchange the commonplaces usual to such meetings. In the course of their conversation Parker learned that Bob Travers was connected with an investment brokerage house. "That's interesting, Bob—perhaps you can clarify a few things for me. I've been doing a little investing lately, and it seems to me that every time the subject comes up, the question of investment trusts arises. I've heard so much for and against this type of security, that I really don't know what to believe. I've had pictures of huge profits painted for me—I've had the question of true investment as against comparative speculation put before me—and dozens of other debatable points about investment trusts raised continuously. But nothing seems to really explain their good and weak points for me. What I want to know primarily is how safe they are, and how I can tell which ones are safer than others."

Bob Travers laughed. "Books could be filled with the answers to those questions, and in one lunch hour I certainly couldn't do full justice to the subject. If you want, I can sketch very briefly what I've learned about that phase of investment trusts."

"I wish you would," his friend replied. "Every little bit helps."

Travers lit a cigarette and studied the glowing ash for a few minutes. "If, by safety," he began, "you mean the impossibility of loss—then the answer is 'no.' You can't buy an investment trust stock that will guarantee you absolute safety. But don't misinterpret that statement. Nothing in this world carries so absolute a guarantee that something else can't come along and make that guarantee worthless. For that matter, there's no guarantee that this world itself will still be here tomorrow. In other words, investment trusts, like everything else, must be judged on a comparative basis. All of these trusts have stocks among their holdings, and it is evident that the value of stocks is not fixed but fluctuates according to the earnings trend of the corporations which issue them, and according to general business and stock market movements as well. Since the shares of investment trusts are either wholly or partly based on such stocks, it is only natural that their market value should more or less follow the rise and fall of the stocks held by that trust.

"The degree of risk varies greatly, being dependent upon the character of the trust, its capital set-up and its holdings. Now take the so-called 'Fixed Trust' . . . .

"You mean" interrupted Charlie, "a trust which cannot change its holdings except under certain drastic conditions?"

"Yes. Fixed Trusts issue only one kind of stock and do not offer bonds or preferred stocks against the securities which they hold. Consequently the value of their shares fluctuates in the same proportion as the value of their stockholdings. For example, a fixed trust has a portfolio—or holdings—worth $1,000,000. It has nothing but its own common stock outstanding. Let's suppose that this consists of 100,000 shares, meaning that the value of each share is $10. Now, if the $1,000,000 worth of securities goes up 20% in market value—to $1,200,000, then the trust's stock also goes up 20%—to $12. a share. Or vice-versa, if the market value of the portfolio drops 20%, the value of your trust shares goes down accordingly to $8.

"The point I want to make here is that there is little chance of these trust shares becoming totally worthless unless the holdings of this trust are wiped out with an entire 100% loss, and in the case of intelligent, selected high-grade stockholdings, this is not only unlikely but almost impossible."

"Of course . . . I see that," Charlie broke in at this point, almost impatiently, "Now let's take the management type of investment trust, where the holdings are not fixed, but can be bought or sold entirely at the discretion of the management board. "Are these trusts just as safe or are they in another boat?"

"Some of them are, as you put it, 'in another boat,'" Bob replied, "because a great many trusts of the management type employ senior capital."

"What do you mean?" Parker asked.

"That simply means," Travers answered, "That they not only have common stock outstanding, but also preferred issues or bonds or sometimes both. Now, here you have something of a more speculative nature, something that can be very attractive if everything goes well. But in a declining market its value can shrink very rapidly and may be totally wiped out in extreme cases. Just let's assume that that kind of investment trust also owns $1,000,000 worth of securities. Against this it has issued $500,000 worth of its own bonds, $300,000 worth of its own preferred stock and the remaining $200,000—or 20% in common stock—20,000 shares of it valued at $10. a share.

"Now the holdings of this trust go up 20% in market value—making the securities worth $1,200,000. Deduct out of that $800,000 for the bonds and preferred stocks and there will be left $400,000 for the 20,000 shares of common stock, mak-

Copyrighted material

Their Future

ASSURE college advantages for YOUR child—easily—surely—by setting aside as little as $13.00 a month. Return this advertisement with your address for pamphlet fully explaining the Investors Syndicate Plan, used by

200,000 INVESTORS

INVESTORS SYNDICATE
FOUNDED 1894
MINNEAPOLIS
BOSTON-LOS ANGELES
MONTREAL

IT'S EASY TO MAKE BIG SPARE TIME MONEY

Send for our free plan on how to make $5.00 to $15.00 a week in your spare time by taking orders for POPULAR SCIENCE MONTHLY from your friends. No selling required. Turn extra hours into extra dollars.

POPULAR SCIENCE MONTHLY
381 Fourth Ave. New York, N. Y.

HERE'S A BOAT YOU *WON'T HAVE TO CAULK!*

Even though she's been stored for the winter, you slide your Old Town over—hop aboard—and go right away! She won't need to be soaked or caulked. The heavy, non-leak canvas-covering can't open up. Nor does an Old Town shimmy, shake or vibrate. And the stern is braced at every angle, so a heavy-weight motor won't harm it. Yet an Old Town is light—easy to handle—and has all the speed you want.

Free catalog shows prices and models. Also canoes; rowboats; dinghies; big, fast, seaworthy, all-wood, outboard family-boats, and speedy step-planes. Write today. Old Town Canoe Co., 1234 Main Street, Old Town, Maine.

"Old Town Boats"

$100 *a month as long as you live*

THE PROVIDENT PROVIDOR

A Unique and Comprehensive Retirement Plan for Men under 55

IT PROVIDES

$100 a month to you, starting at age 65
$100 a month in case of prolonged total disability before age 65
$10,000 should you die before age 65
$20,000 in case death results from accidental means before age 65

LET a young man start today to save $25 or $35 a month in an ordinary savings plan and, if he should die or be disabled within the month, his family would receive only the amount of his deposit.

BUT, let him start today to lay aside the same sum toward a $10,000 Provident Providor and if he should die tomorrow his dependents would receive not the amount of his investment, but, the entire $10,000.

IF instead he were to become totally disabled for a period of at least four months, the Provident Providor would not only continue to make his savings for him (just as if he were making them himself) but would also yield him a monthly income of $100 while his disability lasted.

In this way the Providor combines an ideal plan of savings with a well-rounded program of family protection. The Provident Providor is elastic—made to fit your needs. Through its provisions you can arrange for an income of from $50 to $1000 a month as your circumstances require.

TODAY, while you are insurable and can spare the money, let us tell you how small a yearly deposit will put the Provident Providor into action at your age. Protection starts at once.

Just fill in and return the coupon, and we shall send full particulars.

Provident Mutual
Life Insurance Company of Philadelphia, Penna.
Founded 1865

P. L. M. I. Co.—1931

Mail this Coupon NOW!

PROVIDENT MUTUAL LIFE INSURANCE CO.
Philadelphia, Pennsylvania

Please send free descriptive booklet and quote premium rate for the Provident Providor at my age, with the understanding that it places me under no obligation.

I was born _____
Month Day Year

My name is _____

Home address _____
Street City State

Business address _____
Street City State

GIVE UP MERE "HABIT"

smoke for pleasure

IS smoking just a habit with you? Do you grab a quick smoke many times a day? If you do, you're missing the real pleasure of good smoking.

A pipe smoker is a calm smoker . . . a cool smoker . . . a contented smoker. He smokes for pleasure.

Perhaps you've never known the contentment that comes from a pipe and — Edgeworth. Get a tin of Edgeworth from your dealer, and settle down to smoke for pleasure.

Then you'll understand why pipe smoking never becomes just a habit. You'll understand why so many men say, "A pipe and Edgeworth is the only smoke for me." You can buy Edgeworth wherever good tobacco is sold. Or send the coupon below for a special sample packet of Edgeworth—free.

EDGEWORTH
SMOKING TOBACCO

Edgeworth is a blend of fine old burleys, with its natural savor insured by Edgeworth's distinctive eleventh process. Buy Edgeworth anywhere in two forms—"Ready-Rubbed" and "Plug Slice." All sizes, 15¢ pocket package to pound humidor tin. *Larus & Bro. Co., Richmond, Va.*

15¢

—CLIP COUPON— K-6B

LARUS & BRO. CO., 100 S. 22d St. Richmond, Va.

Send me the Edgeworth sample. I'll try it in a *good* pipe.

Name_____

Address_____

City and State_____

WHY SOME INVESTMENT TRUSTS ARE SAFER THAN OTHERS

(Continued from page 4)

ing each share worth $20. In other words, a 20% rise in the market value of the trust's portfolio has raised the value of its common stock 100%. Likewise, a 20% drop in the market value of its holdings will cause a 100% loss on the common stock of the trust, since the $800,000 left by such a drop would be taken up by the outstanding amount on the bonds and preferred stocks."

"Just a minute, Bob. When you look at it that way, from the common stockholder's point of view it's just as if the trust had bought stocks on margin—or on money obtained from the bond and preferred stockholders."

"Exactly," Travers agreed. "And everybody knows that you can make money faster on margin speculation . . .

"And lose it much faster than if you bought outright," said Charlie Parker, finishing Bob's statement.

"Absolutely," continued Travers. "Now, there are some investment trusts of the management type which do not employ senior capital, and in this respect they are comparable with fixed trusts. The difference between the two from a safety standpoint is that the fixed trust cannot as a rule change its holdings, whereas the management trust can. In the latter, if the management's operations are successful, they can result in sizeable profits and prevent losses which the fixed trust—with its hands tied—has to accept. On the other hand, the management trust can also make investment errors and thus cause larger losses than the fixed trust would have to suffer.

"Before I forget, there's another point in connection with the use of senior capital that needs some further explanation. If the value of the shares of such a trust has already shrunk to, or near to, zero, they still command a market price of about two or three dollars per share."

"How is that?"

"It's due to the fact that there is still a demand for them by some investors who count on a market recovery to make them valuable again. Since the purchaser of such shares risks only a small amount of money, put up for each share, he knows definitely the limits of any probable loss—and at the same time, he stands to reap large profits, should a substantial recovery in the market value of the trust's portfolio take place. In all events it is speculative, and the wise investor should realize this."

Bob stopped at this point, and for a while Charlie made no attempt to carry on the discussion. Finally he said, "I know a great deal more about investment trusts than I did. Now tell me—how would you classify them as to safety?"

"From what I've said," Travers replied, "you can see how much depends on the particular circumstances of each trust. You can't therefore draw a sharp line and say, 'all these on this side are safe, and all those on the other side are not safe.' Generally speaking I'd classify them as follows:

First—Fixed Trusts holding high grade securities.
Second—Management Trusts carrying high grade securities, but not employing senior capital.
Third—Management Trusts holding high grade securities and using senior capital.
Fourth—all other trusts."

"Well," Charlie put in, "that should be definite enough for anyone. Now to get back to our original point about risk—how does this apply to these classifications?"

"It applies in this way—if a prospective investor is thinking about buying investment trust shares, and he doesn't want to allow even the slightest percentage of risk on his choice, or refuses to see such a possibility, then he is making a mistake. His money should stay in the savings bank. But if he is human to the point of accepting a small but fair degree of risk, then his choice should lie between the first three classifications—the fourth should not be considered at all. And always he should remember that the larger his risk, the larger his possible profits and *vice-versa*."

To Help You Get Ahead

THE booklets listed below will help every family in laying out a financial plan. They will be sent on request.

"The Provident Provider" is a booklet describing a new savings plan which provides a regular retirement income for a man and insurance protection for his family. A copy will be mailed on request by Provident Mutual Life Insurance Company, Philadelphia, Pennsylvania.

The House Behind the Bonds reminds the investor of the importance, not only of studying the investment, but of checking up the banker who offers it. Address: Fidelity Bond & Mortgage Co., 1188 New York Life Building, Chicago, Ill.

How to Get the Things You Want tells how you can use insurance as an active part of your program for getting ahead financially. Phoenix Mutual Life Insurance Company, 528 Elm Street, Hartford, Conn., will send you this booklet on request.

Enjoy Money shows how the regular investment of comparatively small sums under the Investors Syndicate plan, with annual compounding of 5½% interest, builds a permanent income producing estate, a financial reserve for a business, or a fund for university education or foreign travel. Write for this booklet to Investors Syndicate, Investors Syndicate Building, Minneapolis, Minnesota.

How to Retire in Fifteen Years is the story of a safe, sure and definite method of establishing an estate and building an independent income which will support you the rest of your life on the basis of your present living budget. Write for the booklet to Cochran & McCluer Company, 46 North Dearborn St., Chicago, Ill.

See How Easy It Is tells how it is possible to start off with a definite plan for creating an immediate estate leading to future financial security. Get your copy of this booklet by writing to Postal Life Insurance Company, 511 Fifth Avenue, New York City.

Don't get discouraged, Bill—thousands of other fellows get their hands just as dirty as yours.

But do they worry about it? Not on your life! They just go after that dirt with a cake of Lava Soap.

In 58 seconds its pumice-filled lather makes new hands of 'em. Take my advice and buy yourself a few cakes to-night.

George, the Lava Soap Man

A Procter & Gamble Product

THOMPSON BOATS

THOMPSON BOATS

CATALOG FREE!

The Best that skill and experience can produce—at new low prices. Prompt shipment from factories to you

Outboard Motor Boats $60.00 and up

A complete line of real fast, safe and sea-worthy boats for family use. Also fastest racing models.

Rowboats $48.00 and up



Improved models. Safe and seaworthy. Strong and durable. Easy to row and handle with oars.

Canoes $50.00 and up



Three models and four lengths. Including non-sinkable sponson canoes.

Motor Boat $745

Mahogany Runabout. 16 and 18 ft. Speed 25 to 35 mi. per hr. Complete with 4-cycle motor installed, including electric starter and reverse gear.

CATALOG FREE—SAVE MONEY—ORDER BY MAIL
Please state the kind of boat you are interested in (10)

TWO LARGE FACTORIES

THOMPSON BROS. BOAT MFG. CO.

219 Ann St. PESHTIGO, WIS. (Write to either Plant) 119 Elm St. CORTLAND, N.Y.

The 2 coolest barbers are the INGRAM twins

(TERRY TUBE AND JERRY JAR)

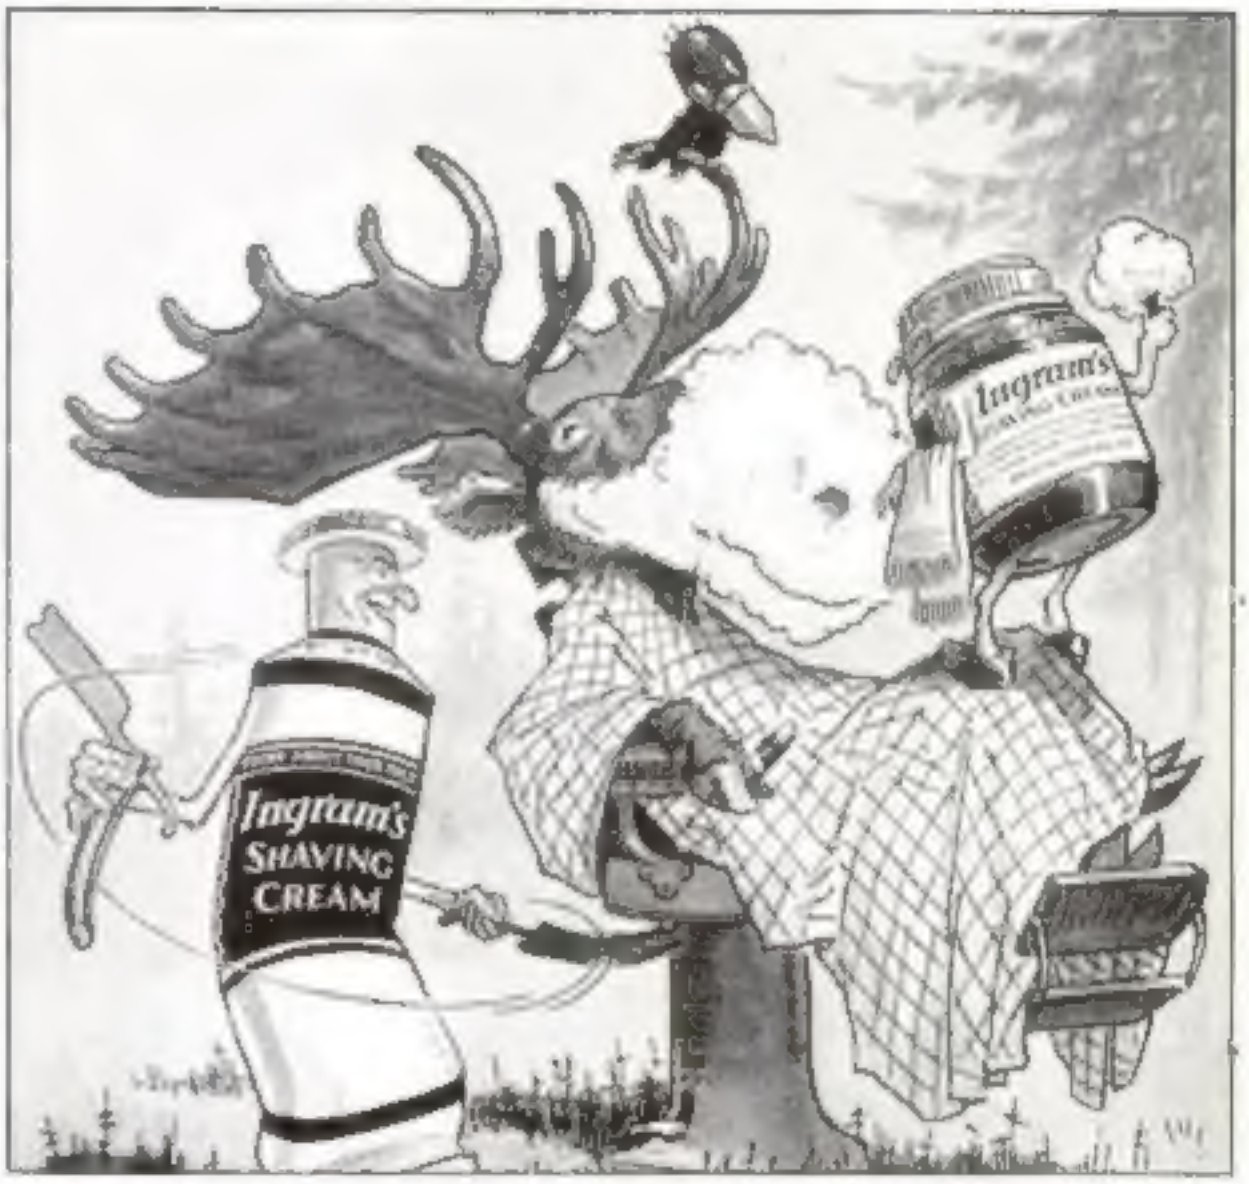

I'm a Moose and I don't mean a Senator from Pennsylvania. I live up here in Labrador. I thought I knew what COOL meant. But I was wrong!

These 2 Ingram boys put me on the spot—I mean in the chair, and the shave they gave me, though it warmed the cockles of my heart, left the old chin

COOL and COMFORTABLE

I competed in the Ingram contest and I didn't win a prize! But I like these two Ingram barbers (Terry Tube and Jerry Jar) for both have the same kind of interiors—that is to say, they are the only 2 shaving creams with real insides (guts, sir, if you prefer the word).

Now, let's get commercial and stop fooling.

Ingram's is the coolest shaving cream ever devised by the hand of man. It's cool because somebody started out with the idea of making it cool. It's so different from all others that it might have been made on the planet of Mars.

You need no lotion with either kind of Ingram's. It's a shaving cream, and lotion and a face tonic combined. It's cool, it's COOL, it's *COOL*.

We feel so certain that Ingram's (tube or jar) is what you want, that we make no effort to sell you anything. Instead, we offer to give you 10 shaves free. We lose money if you don't like it (fine chance, that) but we make a dime a year if you do!

INGRAM'S
Shaving Cream

Clip Coupon for 10 COOL SHAVES

Bristol-Myers Co., Dept. H-41
110 Washington St.,
New York, N. Y.

I'd like to try ten cool Ingram shaves

*Name*_____

*Street*_____

*City*_____ *State*_____

Copyrighted material

INDEX
Guaranteed Advertisements

Popular Science GUARANTEE

POPULAR SCIENCE MONTHLY guarantees every article of merchandise advertised in its columns. Readers who buy products advertised in POPULAR SCIENCE MONTHLY may expect them to give absolute satisfaction under normal and proper use.

Tools, Radio Apparatus, Oil Burners and Refrigerators advertised in POPULAR SCIENCE MONTHLY have been tested or investigated by the Popular Science Institute of Standards and each advertisement carries the insignia indicating approval.

However, other products advertised in the magazine not subject to test carry the same guarantee to readers as products tested.

THE PUBLISHERS

Copyrighted material

The Britannica is a working force in the lives of those who use it

THE moment the Encyclopaedia Britannica enters a home, it begins to *work* with and for every member of the family.

There is nothing static about the Britannica. You cannot put it in a corner and forget about it, any more than you could lock your automobile in a garage, and throw away the key.

For all the creative knowledge of the world down to the present time has been brought together within the pages of the Encyclopaedia Britannica.

This knowledge is, in itself, dynamic. It is Power—Energy—Force—Assistance—continuously demanding that you put it to work, as you immediately will.

The new Britannica does what no library, however complete, what no single intellect, however potent, can do—its twenty-four volumes hold what is essentially instructive in the contents of all the vast libraries of the world and in the ideas of all living brains, so far as they have been publicly communicated.

Every member of the family can use it

Each one of them needs the new Britannica. The times require it. "The people of the United States have greater and more intricate problems before them now than ever before," says Owen D. Young. "Their material and spiritual prosperity rests on a wise solution. Economics, politics, and science are all interrelated, and accurate information regarding them is essential. A good encyclopaedia is necessary, and the new Britannica meets these needs with its traditional thoroughness."

It makes Children's school studies easier

The Britannica is a refreshingly new experience for children as well as adults. Its thousands of brilliant pictures—many in full color—command their interest, and the simple text is persuasively readable and helpful.

Advanced Students need it

Suppose that someone in your home wishes to know more about Literature—Architecture—Law—Mechanical or Electrical or Civil Engineering—Medicine—Physics and Chemistry—Art—Music—Psychology—Economics—Agriculture—Aviation—Astronomy—Religion—Social and Political Science—Commerce—Hydraulics—History—Manufacture—Advertising and Selling—Radio and Television—Interior Decoration, etc., etc.

In the Britannica these subjects are helpfully explained by hundreds of the world's greatest present-day authorities who offer most constructive suggestions to both youthful and advanced students.

The Incomparable Purchase

In text alone the 24 volumes of the new Britannica bring you 35,000,000 words written by 3,500 authorities—the equivalent of 500 ordinary size books. Yet you buy it—with its 15,000 brilliant illustrations and the hundreds of new maps—for a mere fraction of what the 500 books would cost you.

New Low Price, Only $5 Down

Only $5 down, according to our Time Payment Plan, will bring the new Britannica and the fine bookcase table to you for immediate use. You may buy it on easy payments. It is your opportunity to buy the Britannica at the lowest price for a completely new Edition in 60 years.

56-Page Free Booklet

Brought by your postman

Fill in and mail to us the coupon below and it brings you by return mail our Free Illustrated Booklet, with richly printed pages, and sample maps and gorgeous plates in full color from the new Britannica itself, as well as a vivid description of what the Britannica is and how it works. You will be under no obligation. Simply fill out the coupon and mail it today.

ENCYCLOPAEDIA BRITANNICA, Inc.
342 Madison Avenue, New York City

Please send me, by return mail, your 56-page illustrated booklet with color plates and maps from the new Britannica, together with low price offer, etc.

Name _____

Address _____

City _____ State _____

P. S. M. 1—31

SEND FOR FREE BOOKLET TODAY

Chevrolet uses the Fisher composite body construction of wood and steel

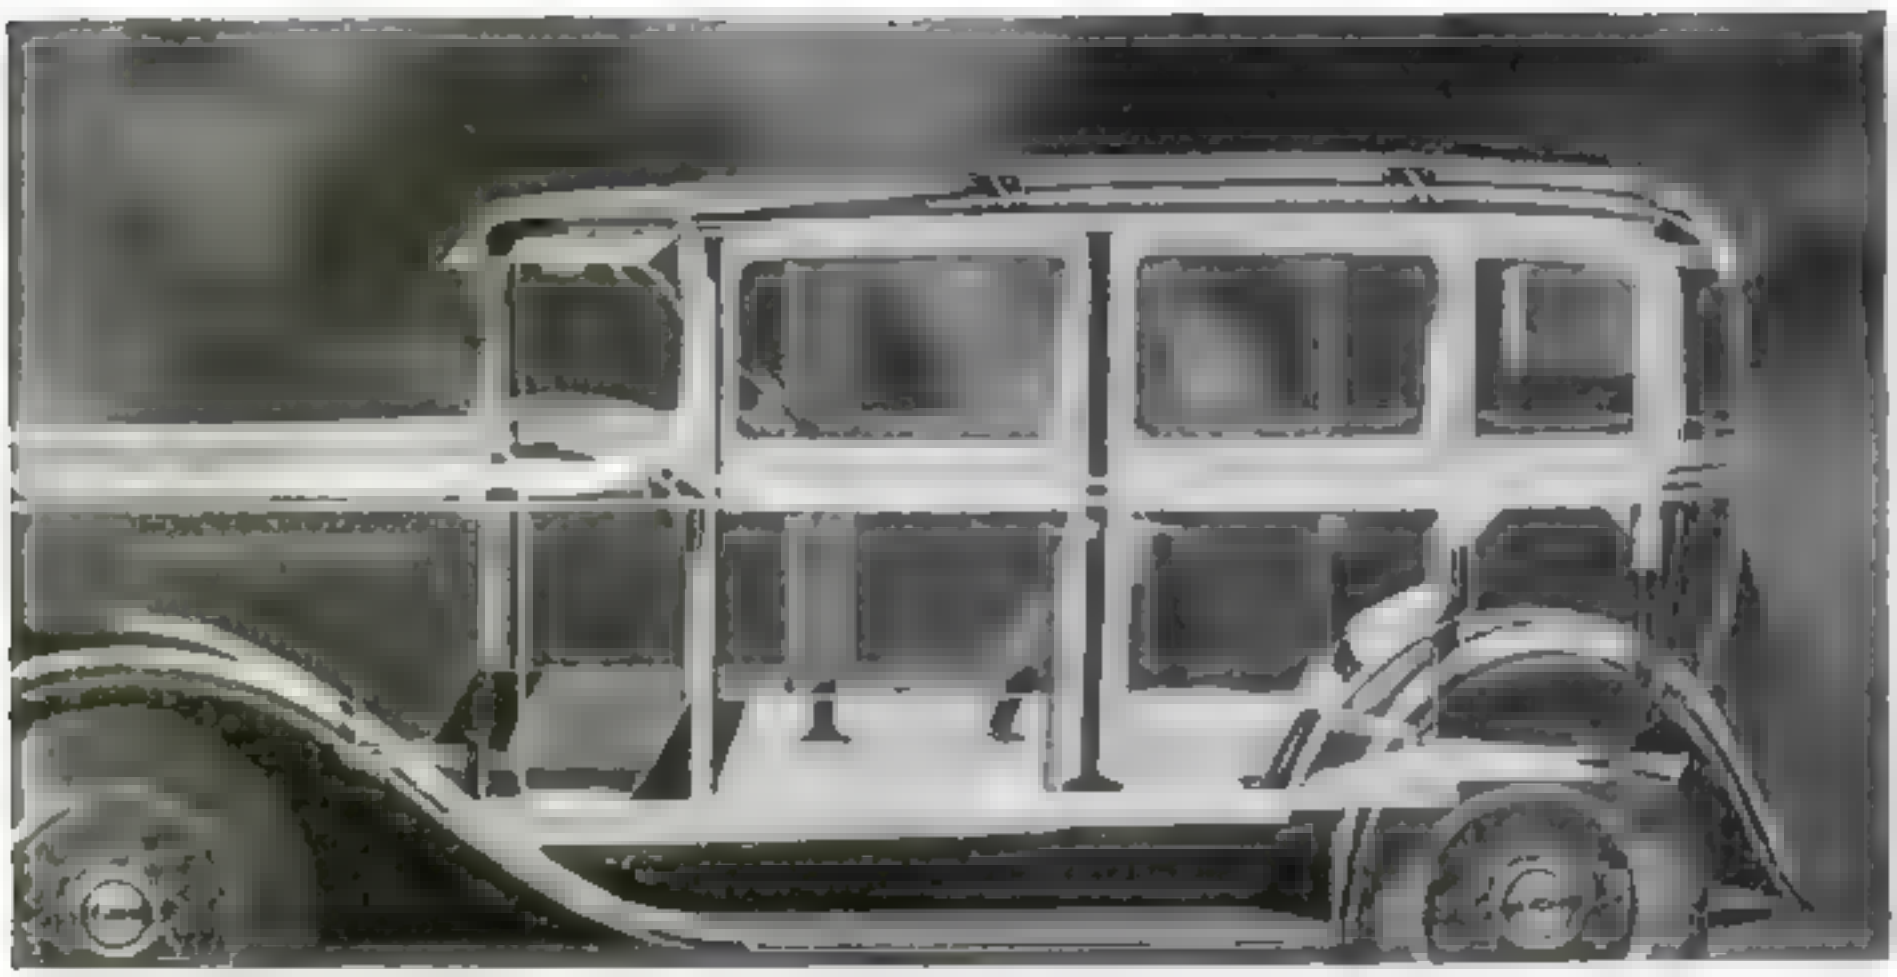

As most technical men know, the use of wood and steel in combination is the basic structural principle of all expensive coachwork.

Fisher Body has always used this construction, because it is stronger, more durable and more resilient. In closed bodies for the low-priced Chevrolet Six, Fisher employs this principle, without compromise.

The framework of Chevrolet-Fisher bodies is made of selected, seasoned wood. Every joint is accurately fitted, carefully mortised, and screwed or bolted, in addition to being glued. All points where extra stress or strain is likely to take place are fortified with special steel braces. And a paste of linseed oil and white lead is laid between the wood and steel to prevent rust and preserve the wood.

Over this solid wood foundation, staunch steel panels are then secured so that the wood reinforces the steel and the steel reinforces the wood. These panels are made on costly steel-faced dies which give them a smooth, solid surface. Huge presses stamp them in large units, with mouldings and window reveals shaped to the proper contours in the metal itself, for the sake of strength and good appearance

Furthermore, the roof of these bodies represents a separate assembly of the sturdy bow-and-slat construction. The bows are cut to shape instead of being steam bent. Double-steel braces bind the side members of the roof rail together. And a specially notable feature of Chevrolet roofs is the good-looking, rigid steel roof panel.

This Fisher composite wood-and-steel construction is typical of the substantial quality that extends throughout the entire Chevrolet car. Structurally—as well as artistically—Chevrolet is a fine automobile.

Chevrolet prices range from $475 to $650, f. o. b. Flint, Michigan
Special equipment extra. Chevrolet Motor Company, Detroit, Michigan

NEW CHEVROLET SIX

The Great American Value

THE INSULITE CO.
(A Backus-Brooks Industry)
1200 Builders Exchange, Dept. 430 Minneapolis, Minnesota
Offices in All Principal Cities

Gentlemen: Please send me your free booklet, "Increasing Home Enjoyment" also a sample of Insulite, and plans for the building checked below:

Garage . . . Summer Cottage . . .
Playhouse Farm Buildings

Name
Address
City State

Fill Out and Mail This Coupon

and you will receive prepaid

Free Plans and Complete Instructions

for Constructing these Buildings

WITH

INSULITE
the Wood-Fiber Insulating Board


AUTO GARAGE


SUMMER COTTAGE


CHILDS PLAYHOUSE


POULTRY HOUSE

WOULD you enjoy a comfortable, cozy cottage at the lake, or a hunting and fishing lodge? Perhaps you need a garage to protect your car from the elements, or a playhouse for the children that will keep them away from the dangerous highways. If you live in the country, why not put up a modern poultry house? You can easily construct any or all of these buildings yourself if you have a little spare time and are handy with a saw and hammer. The Insulite Co. will show you how, and furnish you complete plans and instructions without cost. Just fill out the coupon above, check the buildings you are interested in, and mail it today and the plans you desire will be mailed you at once.

These buildings are designed to be built with Insulite, because it is a stronger, more durable and a more efficient insulating board. Insulite, a full half-inch thick, is 12½% more efficient than ordinary 7 16 inch insulating boards. It is made from the strong tough fibers of northern woods, chemically treated to resist fire and moisture, and is not subject to rot or disintegration. Insulite used as sheathing has several times the bracing strength of lumber horizontally applied. This durable insulating board has been left exposed to the elements for over fifteen years without showing any appreciable loss of tensile strength or insulating value.

If you are thinking of building or remodeling a home, let us send you additional information about Insulite, a sample and a copy of our free booklet—"Increasing Home Enjoyment".

FREE  BOOK

IT SHOWS YOU HOW TO TRANSFORM WASTE SPACE INTO USEFUL AND ENJOYABLE ROOMS

If you have space in your attic or basement that is not being used, this book shows you how you can add to your home a recreation room, a playroom for the children, an extra bedroom, a study, a studio, or any other kind of a room that you have longed for. Fill out the coupon above and this book will be sent to you without cost or obligation.

And remember—INSULITE

FULL ½ INCH THICK MEANS
12½% MORE EFFICIENT INSULATION
THAN ORDINARY ⅜" INSULATING BOARDS

For Efficiency and Economy Be Sure Your Refrigerator is Insulated with INSULITE

INSULITE
the Wood-Fiber Insulating Board

For Efficiency and Economy Be Sure Your Refrigerator is Insulated with INSULITE

How About Heating with Oil?

Advantages of automatic burner lie in cleanliness, cheapness of operation, and the ease with which heat is obtained—Fuel available determines the type.

By
COLLINS P. BLISS
Dean, College of Engineering, N. Y. University
Director, Popular Science Institute

Diagram of a typical installation for heating a home with oil

TODAY some 500 000 modern American homes are heated by oil. This type of heat has definitely outgrown the experimental stage and has sufficient attractions to justify an increase in its use of nearly 500 percent in five years, according to the U. S. Bureau of Mines. Therefore it is a feature of modern home equipment that is well worth investigation on the part of the man who is building a house or wishes to make his present home more comfortable.

The tremendous appeal of oil heat is that it means the end of shoveling fuel, and that it brings, in the best types of installations, fully automatic heat. An almost-human thermostat can guard the temperature of a room and start the oil burner if it begins to drop. So highly developed is automatic control that the burner can even be set to keep the house at a certain temperature during the day and a different one at night; without attention, day after day, it scrupulously performs this duty.

There are other advantages of heating with oil. It permits a clean cellar, a feature of which many people take advantage by transforming the cellar into comfortable living quarters, thereby adding an extra room to the house. Moreover, oil heat bridges the interval between winter and the milder months when a home owner is reluctant to start a fire. Even though it be for only two hours a day, the oil burner operates automatically and keeps the chill from the house.

KINDS OF OIL

THERE are many fine burners available today and, in making a selection, one feature that governs the choice is the kind of oil available in your locality.

Oils are graded according to their density or weight per unit volume. This is measured by a "hydrometer" somewhat similar to that used in testing storage batteries. The standard scale of density is that of the American Petroleum Institute, consisting of a series of arbitrary numbers or degrees in which the high numbers represent light oil and the low ones heavy oil. The lightest oils used for fuel are thus about "48° A.P.I.," the heaviest about "18° A.P.I."

There is another scale formerly widely used called the "Baumé scale," based on a similar plan. The numbers are so nearly like the A.P.I. ratings that they may be used practically interchangeably, although for exactness the A.P.I. numbers, as standard, are to be preferred. Forty degrees A.P.I. is equal to 39.7° Baumé. Heavier oils show an even closer agreement between the two scales. The systems become identical at 10° A.P.I. or 10° Baumé.

At present about the heaviest oil practicable for domestic use is 24-28° A.P.I., and the possible choice ranges from there up through the lighter oils and kerosene. Heavier oils than those that have been mentioned require pre-heating and are reserved for industrial oil heating.

DIFFERENCES IN PRICE

BURNERS that can use the heavier fuels may effect a considerable saving. Prices in many localities may range from four to eight cents a gallon, for the heavier oils, to eight to twelve cents or more for the lighter ones; in a house that burns, say, 1 500 gallons of oil, this means a possible difference of as much as sixty dollars for the cost of fuel during the heating season. Moreover, the cheap, heavy fuels contain about five percent more heat value than the more expensive lighter ones!

Makers of the light-oil type burners claim certain advantages for them which should not be overlooked. In general, the lighter the oil used, the simpler and more rugged is the burner. Heavy oils are naturally harder to burn, usually requiring more advanced mechanical devices to handle them satisfactorily. Of course the simpler a piece of machinery is, the less chance it has of getting out of order.

Light-oil burners can burn only this fuel and can therefore be used only where it can be purchased. Oil burners for heavy oil will also burn light oil, giving them a wider field.

Besides the all-important matter of selecting the burner according to the fuels available, there are other criteria in making the purchase.

What kind of installations does the local representative of the make of oil burner considered perform? A good burner carelessly installed may use a fourth again as much oil as an inferior make put in with care. The local representative should be able to exhibit several of his burners installed which are giving satisfactory service in homes.

How near is the man who will "service" the burner, and is he readily available on call? Like an automobile, a motorboat, or any other piece of mechanical apparatus, an oil burner may occasionally stop working. If the service man is within speedy call, the inconvenience will be minor. The dealer should be not more than fifteen or twenty miles away. He should be ready to give immediate service at any hour of the day or night. Many a choice between two excellent *(Continued on page 13)*

INSTITUTE BULLETINS
Heating and Ventilating*
Insulation in Building Construction*
List of Approved Tools
List of Approved Radio Sets
List of Approved Oil Burners
Advice on Installing Oil Heat
Refrigeration for the Home*
*Starred bulletins 25 cents

HOW ABOUT HEATING WITH OIL?

(Continued from page 52)

burners, one with an alert local service man and the other without, has been correctly decided in favor of the first

Installing the Burner

The fuel supply system for an oil burner may come from a 275-gallon tank, the largest that the National Board of Fire Underwriters approves for use within the basement, or a tank of from 500 to 1500 gallons or more capacity, buried outdoors.

The larger sizes, 1000 to 1500 gallons, are much to be preferred for buried tank installations. Since these sizes may be, roughly, the equivalent of from 8 to 12 tons of coal, they reduce to a minimum the need of replenishing the fuel supply frequently Moreover, in some localities, the owner has the advantage of being able to buy his oil at a "tank-wagon price" from ½ cent to 1 cent a gallon lower than his neighbor with a small tank

In localities where oil companies have well-established delivery service the smaller inside tank has some advantages, it costs less, the equipment is more easily serviced and with some types of burners additional equipment is dispensed with in the form of a pump

Underground storage requires some sort of pump to transfer the fuel to the burner, and this is either a pump integral with the burner or a separate unit in the basement—either electric or hand-operated. Electric pumps are automatic and require no attention to keep the supply of oil flowing. An auxiliary tank within the basement is optional with many systems; it is not necessary, and the less oil-handling equipment in the cellar the less chance there is of oil leakage

The installation of the burner itself in furnace or boiler is a job that calls for the attention of an expert, as a slight change in bricking in the fire-box with refractory material to direct the flame properly may alter the efficiency of the whole system materially A good installation man knows just how best to adapt a burner to a particular heating boiler, and for that reason it is of paramount importance to select a make of burner represented by such a man

Care of the Burner

Beyond seeing that it is kept clean and that parts requiring lubrication are properly oiled—many oil burners require this attention but once or twice yearly—the less a home-owner has to do with his burner the better. With such routine care a burner should give excellent service, and any mechanical trouble calls not for tinkering but for the service man. Of course this implies the exercise of some intelligence Often the man who is most careful about keeping his car's tank full of gasoline reaches at once for the 'phone when his oil burner stops without warning—and it turns out that the oil is used up

Occasionally—once a year say—the underground tank may require cleaning to remove water that has settled out of the oil This will keep the bottom from rusting through, and is performed by dropping a hose down the fill pipe or test well and pumping it out Indoor tanks have a bottom plug removable for draining and cleaning

This One Unique Floor Machine

Polishes

The electrical way of doingoverfloors. Plug into an electric light socket like a vacuum cleaner. You don't even push or pull—you merely guide the machine.

Scrapes

Takes off the old dingy shellac or varnish and sandpapers the wood to velvet smoothness.

Waxes the floor and then polishes it. Result is far superior to handwork and you use much less wax.

Scrubs

Here's the way to clean tile, cement or marble floors. Fast. Efficient. No back-breaking drudgery. No splashing.

COSTS but a FRACTION of what a contractor would charge for doing over your FLOORS . . . so amazingly SIMPLE you operate it YOURSELF

You'll be surprised how beautiful your floors *could* be.

They may look dingy and disreputable now, but how they'll gleam and glisten when done over the *electrical* way.

Instead of pulling rugs over the ugly worn spots, as you may be doing now, you'll be so proud of the lovely finish that you'll hate to cover up a single inch.

Can't you picture how much better your furniture will look . . . and your draperies and rugs!

Can't you just hear your friends asking whether you've had a *new* floor put down?

How amazed they'll be when you tell them that you actually did over your old floors *yourself* . . . that the marvelous improvement was entirely due to *your own* efforts!

Yet that's just what you can tell them. The Ponsell Electric Floor Machine enables you to scrape, sandpaper, wax and polish your old floors without bringing a single workman into your home.

Too good to be true? Not a bit of it. That's only *one* of the advantages. In addition, you save money because the machine costs but a fraction of what a contractor would charge you to do over your floors.

Then too, the machine refinishes your floors in such a way that they are no trouble at all to keep looking beautiful all the time.

It's astonishing how quickly and easily floors can be done over with the aid of electricity The *head*-work YOU do; the *hard* work you leave to the machine.

You plug into a socket just as you would with a vacuum cleaner. In a few minutes you are running the Ponsell like an expert and your floors are on the way to a vast improvement.

Good-bye, Drudgery!

When floors are done over by ordinary methods they have to be refinished every few years, and it is no easy task, as you well know, to keep them looking presentable from day to day.

But when you do them over the Electric way, you never have to refinish them again and, what's more, the machine takes care of them for you forever after

FOR YOUR BUSINESS, TOO: Thousands of leading firms keep their floors spick and span with the Ponsell. Far cheaper than hand labor. Write for information. See coupon below.

TEAR OFF . . . FILL IN . . . MAIL TODAY

Ponsell Floor Machine Co., *Dept. P. S. 431*
230-30 West 19th St., New York City

Please mail me complete information regarding your Electric Floor Machine

I am interested in { business / residence } floors.

Name_____

Address_____

City _____ State_____

Our Readers Say

Himself, in Person: Your Artist!

SOME of your contributors to the "Our Readers Say" page sing the praises of your cover designer. I wish to voice appreciation of the efforts of the anonymous artist who makes life worth living by his witty and apt illustrations to the printed comments. Some months ago there was a sketch of a chap blowing over a curved piece of paper. That little picture kept me happy for the day. The terrible animal illustrating "He heads crusade to exterminate autos" in the January number is almost as tickling. Why not let us see what this fellow looks like when at work.—S. J. M., Toronto, Can.

You Knockers, Just Look at This

I AM interested in all forms of science but especially in aviation and mechanics. I like your articles by Assen Jordanoff, Randy Haslow, and others concerning aviation, also Gus and Joe's auto department. I like your "Readers Say" page, but I can't see why some people can be so conceited as to want you to discontinue publishing everything that they don't happen to like, and publish only what suits them. They evidently think that the world was made for them and that everybody else should try to please them. Neither do I agree with H. H. when he tries to run down aviation and monorail trains or any other invention. I think he should learn something about both before he tries to criticize them. As for his "rubber cows," well, they have their advantages and disadvantages just like everything else but they are a subject in themselves too long to be taken up here. But me for the "heavier than air craft," the airplane.—R. R. M., Clearwater, Kan.

Remember the Wrights? Who Can Forget Them?

THE article on Mr. Patterson's plant pills in POPULAR SCIENCE MONTHLY was good, as was also the editorial on "Science and Amateurs." I would like to add, "Don't forget the Wright brothers. They were once only bicycle mechanics but they were mighty good ones."—J. A. McG., Lennox, S. D.

A Problem Right from A Midshipmite

HERE'S one for your readers: Cut notches along one edge of a one-foot stick. Make a small flat propeller, put a hole in it, and fix it to one end with a tack so that it can revolve. Now rub along the notches with another stick and the propeller will revolve merrily. A little experimenting will show how to reverse its motion. The question is, why does it spin? Won't someone give me light on this?—E. S. Q., Annapolis, Md.

He Finds No Magic In the Plant Pills

I NOTICED the article, "Homemade Plant Pills Grow Crop in Sand Hill," in POPULAR SCIENCE MONTHLY. I note you state that the experimenter, Mr. Patterson, was unable to secure "plant pills" on the market. Evidently he is not familiar with fertilizers or the use of same or he would have known, or could have found out readily, that "plant pills" have been manufactured and sold by various concerns for the past ten or fifteen years. Further, from a scientific standpoint, there is no difference in results secured between plant food made in pills or when pulverized, because all plant food has to go into solution before it can be used by the plant. The advantage of Mr. Patterson's method was undoubtedly due to the fact that he placed tar paper at the bottom of the trench to prevent water from escaping too readily, as it would do in this type of soil, then his mulch prevented undue evaporation. There is nothing magical in what Mr. Patterson has done.—A. E. G., Richmond, Va.

Give This Little Man A Great Big Hand!

I SEE that "rule" editorial "He Will Not See," and although I do not agree with the clergyman entirely, I think you are "all wet" on some of your views. Of what advantage when all is said and done, is our modern industrial system when it allows periodic depressions and conditions of social and economic unrest? Of what advantage are our wonderful installations of labor saving machines when they throw out of work (in the long run) more men than their creation replaces? Of what advantage are the efforts of our men of science and medicine who work to prolong life only to see their efforts go for naught due to bungling statesmen and diplomats who hurl their country into either a wasteful war or ignominious and treacherous agreement? I hate to croak, but when good times return, it will be the old cycle once again, then crash! Another slump, and more row! Until depressions are licked, and there must be some way to lick them, all this talk about social progress is just so much bosh.—F. D. C., Hartford, Conn.

Wants to Build Miniature Theater

I AM greatly interested in the construction and operation of the miniature theater, and I should be glad to see in POPULAR SCIENCE MONTHLY a series of articles dealing with the subject. Such things as directions for construction, lighting, scenery, properties, effects (mechanical), et cetera would be of great help. I should be much obliged if you would print this letter in the "Our Readers Say" department as I am sure that there are many other subscribers interested in this who would like to add their voices to mine in requesting such a series of articles. All together now; how many want them?—H. K., Philadelphia, Pa.

To Preserve It, He First Dissects It

FOR several years I have been a reader of POPULAR SCIENCE MONTHLY. I secure it each month at a newsstand and enjoy it to the utmost. In all the years I have had the magazine I think the January, 1931 issue the best. If it improves each year in the future as it has in the years I have had it, it will soon have to be added to the seven wonders of the world. Along with others I would be glad to see two or three columns of chemistry a month, but don't change the nature of the magazine or much of its value will be destroyed. Keep it POPULAR Science. Being a teacher, and by nature of changing habitats, it is impossible for me to keep the whole magazine, and therein lies my tale. Is there no way that the pages may be prepared so that they may be removed more easily? Now, after reading the issue through, I have to remove the staples and then dissect the works, removing to my files the many articles I desire to save. Won't you please try and think of some way to save me all of this destructive and annoying labor?—L. S. S., Comackie, N. Y.

Do Slammed Gates Hurt the Amateurs?

YOUR editorial, "Science Needs Amateurs," leads me to the reflection that amateurs do not get a square deal from the scientific world. Amateurs are seldom recognized until they make good and their path to success is usually blocked with almost insurmountable obstacles. Their friends discourage them, and experts consign their proposals to the waste basket. For instance, Back in 1907 I worked out a plan to farm with the use of impervious paper to retain the moisture. A city dweller, I had no opportunity to experiment, and in 1922 I gave my idea to the United States Department of Agriculture and the University at Lincoln, Nebr., and to one of the large farm papers. The editor said he didn't think much of the idea. The University said it sounded all right but did no experimenting. In 1924 the Department of Agriculture began experimenting with the result that my theory was

Evidence!

These letters disclose successful treatment of LOOSE DANDRUFF and other scalp troubles . . . .

WHERE can you find better evidence of the value of Listerine as a treatment for scalp troubles and loose dandruff, than letters from men for whom Listerine has ended such conditions?

Below we print some of the many hundred of enthusiastic letters we have received on this subject. Read them. You may find a solution to your own problem.

Remember that the Listerine treatment is simplicity itself. You simply douse it on the scalp full strength (as a part of the shampoo or independent of it) and follow with vigorous massage. You will be delighted to see how quickly you get results. Lambert Pharmacal Co., St. Louis, Mo., U. S. A

Ended Dandruff Quickly

Dear Sirs.

When I graduated from college and went into the bond business, the matter of my personal appearance was of prime importance and falling hair and dandruff added nothing to my neatness. Upon the advice of my barber I purchased my first bottle of Listerine. The first bottle did not totally stop my trouble, but successive applications soon got to the root of the evil and today I have no scalp trouble at all.

Very truly yours,

(Signed) Marshall Lewis,
Philadelphia, Pa.

Doesn't Fear Inspection Now

Dear Sirs

Every man in Uncle Sam's Navy knows how hard it is to keep the blue uniforms spotless. Several months ago I was handicapped with a bad case of dandruff. I had tried various remedies but to no avail. One day I noticed an advertisement wherein it was stated that Listerine would kill 200,000,000 germs in 15 seconds. Right away I made a trip to our canteen and purchased a bottle.

I used it freely every third day, and today I have hair free from troublesome dandruff. It certainly is a relief to know that when I put on my best suit of "blues" for an inspection, that I will not have the shoulders spotted with flakes of dandruff. More power to Listerine!

(Signed) D. G. Rorie,
U. S. S. Utah

No More White Flakes

Gentlemen.

The plumbers had turned off the water in my San Francisco apartment. I prepared to shave and so discovered the fact. I couldn't shave and, worse yet, I had nothing with which to "plaster down" my hair

For years I had used water for this purpose and for years I had had dandruff which I regarded as a necessary evil. I opened the medicine chest to see if it contained anything I could use for the purpose and Listerine seemed to be the only thing at all eligible.

Soon after I noticed my dandruff was disappearing. The scaly white flakes no longer dotted my coat collar. I am never without Listerine now and I use about one large-size bottle per month for my hair alone. I have not used water on my hair, except when washing it, for almost ten years.

Very truly yours,

(Signed) Victor L. Klee,
Los Altos, Calif

New Hair Came In

Dear Sirs

I had been troubled with dandruff for years, but gave it no special attention, merely washing my hair when it seemed necessary and when the dandruff became unbearable. I also noticed that a great deal of hair came out in the comb, but felt relieved rather than worried to think my hair was thinning out.

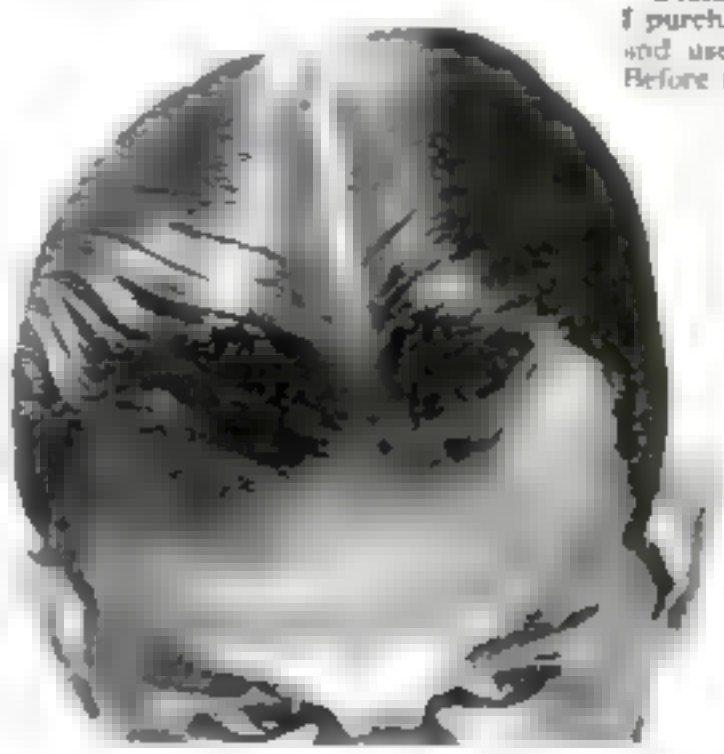

One day I discovered a bald spot, the size of a quarter, at the crown of my head. To my mind there is nothing so disfiguring as baldness, so I began a search for a remedy. I noticed a Listerine advertisement in my magazine, so stopped in the drug store on my way home, bought a bottle, and began the Listerine treatment that night.

I used a little sweet oil and massaged Listerine into the scalp, working vigorously. I then washed my hair with cocoanut soap, hoping I was on the right track. I used Listerine three times a week after that and the dandruff began to clear up immediately and after the second week less hair came out. I kept this up for several weeks and one day seemed to see fine hair growing in the bald spot. This encouraged me more than anything, and my Listerine massages were more vigorous and enthusiastic than ever.

Now, the hair in my "bald spot" is almost as thick as on the rest of my head. I use Listerine once a week and it keeps my hair in splendid condition, checks the dandruff and increases the growth of new hair.

Yours very truly,

(Signed) Philip I. Russell
Chicago, Illinois

Hair Was Thin

Dear Sirs

Dandruff caused me great uneasiness. So I purchased a large size bottle of Listerine and used it twice a week for five weeks. Before the bottle was exhausted a plainly perceptible improvement in my scalp rewarded my efforts and the continued use of Listerine has produced for me a perfectly healthy scalp, free from dandruff, the natural result being thick, healthy hair of improved color and texture.

Very sincerely yours,

(Signed) Virgil W Burgess,
Champaign, Illinois

Don't miss BOBBY JONES
King of Golf
LISTERINE HOUR
Every Wednesday Night
WEAF and a coast to coast NBC network
See your local paper for time

proved correct. The foregoing is written to emphasize the point that millions have been donated to colleges but nothing has been done to make it possible for the amateur to work out his ideas without becoming a martyr to them. I should very much like to see things made a little easier for the amateur who has a good idea and would be glad of a chance to develop it.—J. A. Lalb., Chicago, Ill.

Not Enough Is Better Than Too Much

As to your magazine I have but one criticism—it is that you are not technical enough to make all of your explanations perfectly clear. It is evident that your reason for this fault is to make your articles readable by the layman, so a criticism without a means of correcting the new fault which would arise with the correction of the old would be null and void. I do not stop at this point but make, at this time, a suggestion which I think is plausible. It is that POPULAR SCIENCE MONTHLY publish in the future a series of lessons in science by some good authority. These lessons would cover the same material as does a high school course in natural and physical science and would, if the writer so desires, contain experiments along this line. This would make it possible for you to publish better articles.—C. S. M., Detroit, Mich.

He Gathers Profit from Gus and Joe

This is my fourth year with POPULAR SCIENCE MONTHLY and I haven't been able to find a fault in that time. I think your articles all worth reading but I haven't seen as much of the "racing game" as I would like, especially "auto racing."

I enjoy Joe and Gus and their Model Garage and profit by it, because I am one of the many who enjoy doing a little work on their own automobiles.—G. P. A., Wells River, Vt.

Who Started This Nut Thing, Anyway?

Your correspondent who proposed the nut problem in the December issue of POPULAR SCIENCE MONTHLY do not fairly test the scientific mind of your readers. The original five men problem stipulated that the sixth division gave each of the five men an *equal number of nuts* (no odd nut for the monkey). With this condition imposed, L. T. B.'s formula in the February issue is incorrect except for the minimum number of nuts or when n=1. Here is an interesting modern version of this old problem conditioned as above. "It happened that seven sailors and a monkey were marooned on an island. They spent the first day in gathering coconuts. It happened that each sailor mistrusted the others, so each one stole out during the night to get his share. Each divided the pile he found into seven equal parts and hid his share. In each case there was one odd coconut which was given to the monkey. On the following day they met and divided the remaining pile into *exactly seven equal piles* (no odd coconut for the monkey). What is the third number of coconuts in the series that fulfils the condition that the last division left no odd coconut for the monkey?"—H. F., Tullahoma, Tenn.

That Fish Problem Just Isn't a Problem

THE question that H. G. of Plaquemine, La., submitted is no problem. Water is a chemical combination of hydrogen and oxygen in the proportion of two to one. Fish cannot break water up into its constituent elements but there is oxygen dissolved in the water from the air which they can remove and use for respiration. A fish placed in a sealed glass bowl would live until it had removed the dissolved oxygen, after which it would die but the remaining liquid would still be water.—P. M. D. of Lusicland, Canada, has the right idea when he says keep the present articles to satisfy everyone and if anything add some other interesting subjects. I have built several models and at present am working on a model of the Fokker F-32, using my own plans. I would like to see some plans for fuselage models. Your article on "Better ways to Build Wings for Model Airplanes" was interesting and helpful. Anything along that line will be appreciated.—N. E. F., Rutherford, N. J.

India Produces a Chattering Inventor

I AM so keenly interested in [illegible] ful magazine that I cannot leave it even for a moment till I finish every page of it. "Flops of Famous Inventors" was grand. It gives a lot of encouragement to the budding inventors, who need not be disappointed at their failures. In this connection it may be interesting to note that I too once had an idea of inventing an engine resembling the vocal engine of Thomas A. Edison. This was the way of it. It was the mid-summer and I was at a boarding school [illegible] urged by the teachers to get up early and while waiting for the bath our teeth chattered consistently. (Please do not be under the impression that winter is never cold in India.) It occurred to me that this energy may be utilized by means of a very simple machine in which an oscillating rod be clamped to the lower teeth and the other end be connected to a ratchet wheel which will revolve as the teeth chattered. It also seemed to me that the teeth chattered without any muscular effort on my part. Of course I had no idea of securing a patent because I myself was aware of the folly of such a contrivance, but it was a source of great amusement when I disclosed my invention upon my friends and they nicknamed me "the chattering inventor."—R. H. M., Rewa, India.

Come, Knit Your Brow At This Grazing Cow

I WOULD like to submit to your readers a little problem that I have found rather interesting. It can be solved by calculus, but I am anxious to know if anyone can supply a solution by some other method. Here is the problem: A cow is tied to a post on the circumference of a circular field 100 feet in diameter. How long must the rope be in order that the cow may graze over one half the area of the field?—W. H. O., Santa Ana, Calif.

Growing Aviation Demands More Space

I HAVE noticed with mounting ire the letters of some contributors who state that there is "too much aviation" in the magazine. Perhaps they wonder why so much space is given to aviation in not only your magazine but many others. The answer is that aviation is such a rapidly growing industry that new developments of great interest are constantly appearing. Some day it will slow down but until then it will continue to hold more interest than any other industry. When the railroad and automobile were young, each was given a great deal of attention, but now aviation holds the public eye.—H. R. R., Jr., New Orleans, La.

Would Heating System Change This Old World?

Your article on heating a home by reversing the process of the electric refrigerator was timely and well chosen. While thousands of people have caught a fleeting vision of the same idea, since the first electric refrigerator was invented, you are the first to call attention to its practicability. The main difficulties, technical and otherwise, that occure to one when first contemplating the idea are: (1) The original cost of installation; (2) The difficulty of keeping the outside evaporating coils defrosted (in moderate weather—to say nothing of storms); (3) The danger of leakages from the inside compressor and condenser and the difficulty of getting perfect operable valves for shut-off; (4) The possibe effect of weather conditions being altered by a universal adoption in large centers like New York—or new storm centers created. With sufficient funds for experimental work, I believe no difficulty presented would be insurmountable. What a boom for business and boon to unemployment it would be!—J. W. D., Harmon, N. Y.

Stop Blushing, Mr. Martin Bunn!

Would like to say that your magazine is the only one I take time to read. One of the first things I read is Martin Bunn's articles about the Model Garage. I learn more about my car every month. There is a kid in the neighborhood who is always bothering me for copies of the POPULAR SCIENCE MONTHLY. This would be a great country if all the younger generation read POPULAR SCIENCE MONTHLY.—R. H. L., Nutley, N. J.

Ben Franklin Tried To Answer This One

POPULAR SCIENCE MONTHLY makes frequent reference to white paint, aluminum linen, etc., being used in some manner to "reflect" the sun's rays. How do we know that white reflects the rays and that black absorbs them? Is it not true that the sun's rays are electricity in some form? When they strike the black opaque object are not the electrons dashed to pieces by its resistance, while the white and transparent surfaces absorb the rays of light in varying degrees? As an example: The rays pass through window glass and heat the first object that resists and breaks them up. There is no heat whatever in the sun's rays until they are broken up by striking some object. It is ridiculous to say these rays can retain heat while passing through 92,000,000 miles of absolute cold. It would be just as reasonable to say that the heat given off by electrical apparatus in the home comes, red-hot, over the wires from the power station.—G. E. J., Montreal, Can.

FOR VALUE RECEIVED

A GREAT MANY PEOPLE will tell you that the biggest single service that five cents can buy today is a local telephone call. Without question, it is big value . . . and value that steadily grows as new telephones come into your neighborhood.

There are times when telephone service is priceless . . . when the ability to call instantly a doctor, a policeman, or the fire department could not be measured in terms of money.

But it is not alone the emergencies that give the telephone its value. There are the commonplaces of every-day conversation . . . in the home, the shop, the office . . . whenever you wish two-way communication with any one, almost anywhere.

The telephone has become such an every-day, matter-of-fact convenience—like running water and electricity—that it is natural to take it for granted. It is well to pause occasionally and consider the nation-wide organization of men, money, and materials that makes this vital service possible, and at such low cost.

Here is a system of the public, for the public . . . run on the barest margin of profit consistent with service, security, and expansion. A service that grows as the community grows . . . placing within the reach of an increasing number the means to talk back and forth with people in the next block, the next county, a distant state, a foreign country, or on a ship at sea!

No other money that you spend can bring you more actual value.

★ *AMERICAN TELEPHONE AND TELEGRAPH COMPANY* ★

Industry daily finds new uses for this all-purpose board

GLANCE over the articles listed on this page. Masonite Presdwood helps to build them. Their makers will testify that, with Presdwood, they are better and more durably built, at a decided economy in manufacturing cost.

Presdwood is a versatile product. Each day brings new uses, and each new use suggests another. Its users quickly endorse the idea of "making it out of Presdwood." Somewhere in your own business, very likely, Presdwood can be of service to you . . . and it will serve you well.

Smooth, grainless, and attractively finished, Presdwood comes in boards up to 12 feet long, or cut to order. It can be sawed, punched or drilled, and will not chip, crack, split or splinter. Its resistance to moisture and the fact that Presdwood does not warp is a valuable asset where products serve outdoors.

In construction work, Presdwood lines concrete forms and produces concrete that needs no expensive hand-finishing. In the home, it makes beautiful wall and ceiling panels, turns waste space into delightful living quarters, helps the handy-man in any number of odd jobs.

Write for the helpful Presdwood booklet. No cost; no obligation. Lists 80 of its many uses and the best ways to apply finishes, which Presdwood takes so well. Simply send coupon. Your lumber dealer will be glad to tell you about Presdwood.

MASONITE CORPORATION
111 West Washington Street • Chicago, Ill.

Masonite

STRUCTURAL INSULATION • INSULATING LATH
PRESDWOOD • QUARTRBOARD

"Made in Mississippi"

For homes and business buildings—Masonite Structural Insulation

A modern building essential: keeps heat outside in summer, inside in winter. The small outlay required for Masonite Structural Insulation is soon absorbed by Masonite economies. Cuts fuel bills, perpetuates building values, deadens sound, replaces other building material. Masonite Insulating Lath provides the ideal plaster base—eliminates lath marks. Write for FREE Masonite booklet. Just check and mail coupon.

Send for FREE Booklet

Mail the attached coupon today. It will bring you the interesting Masonite booklet every home owner or prospective home owner should have.

Masonite Corporation, Dept. D-4 © 1931, M. C.
111 W. Washington St., Chicago, Ill.
Please send me, free, the story of Masonite.

Name .....
Street .....
City ..... *State* .....
☐ If interested in Masonite Presdwood, check here.

POPULAR SCIENCE MONTHLY

FOUNDED 1872

FIFTY NINTH YEAR

April, 1931 · RAYMOND J. BROWN — *Editor* · Vol. 118 No. 4

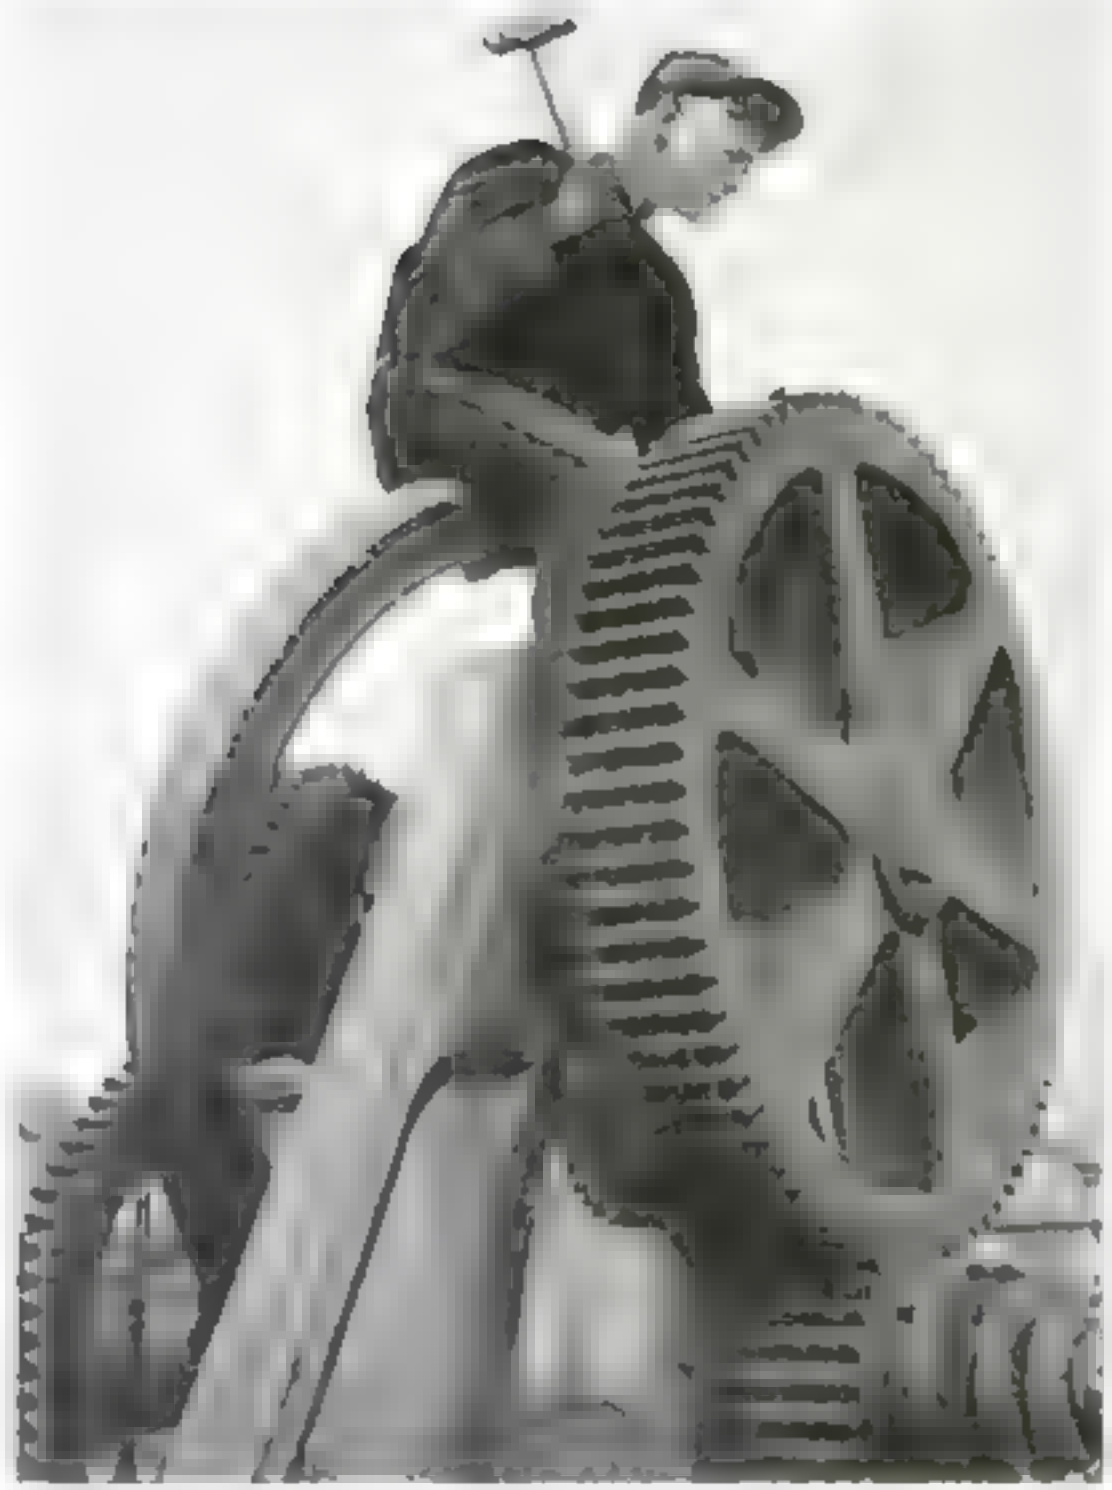

Is New Russia

Built by Americans

A World Menace?

By MICHEL MOK

TWO thousand American engineers have undertaken the biggest job in history. They have been hired by the Soviet government to direct work designed to turn Russia into a world industrial power in five years' time.

These Americans are helping the Soviet transform a country that covers one sixth of the land surface of the earth into a great modern factory. By converting a population of 160,000,000 into one huge army of workers and investing $32,000,000,000, the Soviet aims to change a backward country into an ambitious nation.

This gigantic scheme, put into operation in 1928, is known as the Five-Year Plan. You can know what the plan is and what it aims to do only by knowing how Russia is now governed.

As a matter of fact, there is no "Russia." That vast domain, consisting of more than 8,000,000 square miles and including almost half of Europe and one third of Asia, now is called the U. S. S. R. — the Union of Socialist Soviet Republics. It is ruled by the working class. This means that about 1,600,000 people control 160,000,000—one percent hoss the rest.

This ruling group of one percent is the communist party. Only workmen and peasants have the right to vote. All key offices in the government are held by communists. The party completely controls the army and navy.

The communists came into power in 1917, shortly after the overthrow of the Czar. When it took hold of the government, it divided the old empire into six principal republics. These are governed by a system of soviets, or committees. It's like this. Imagine the United States cut up into six large states. Every village, town, and city would have its own soviet,

At left, Muckle- [illegible] from America [illegible] the conference on [illegible]

Americans are teaching as well as building. Here a Russian is [illegible]

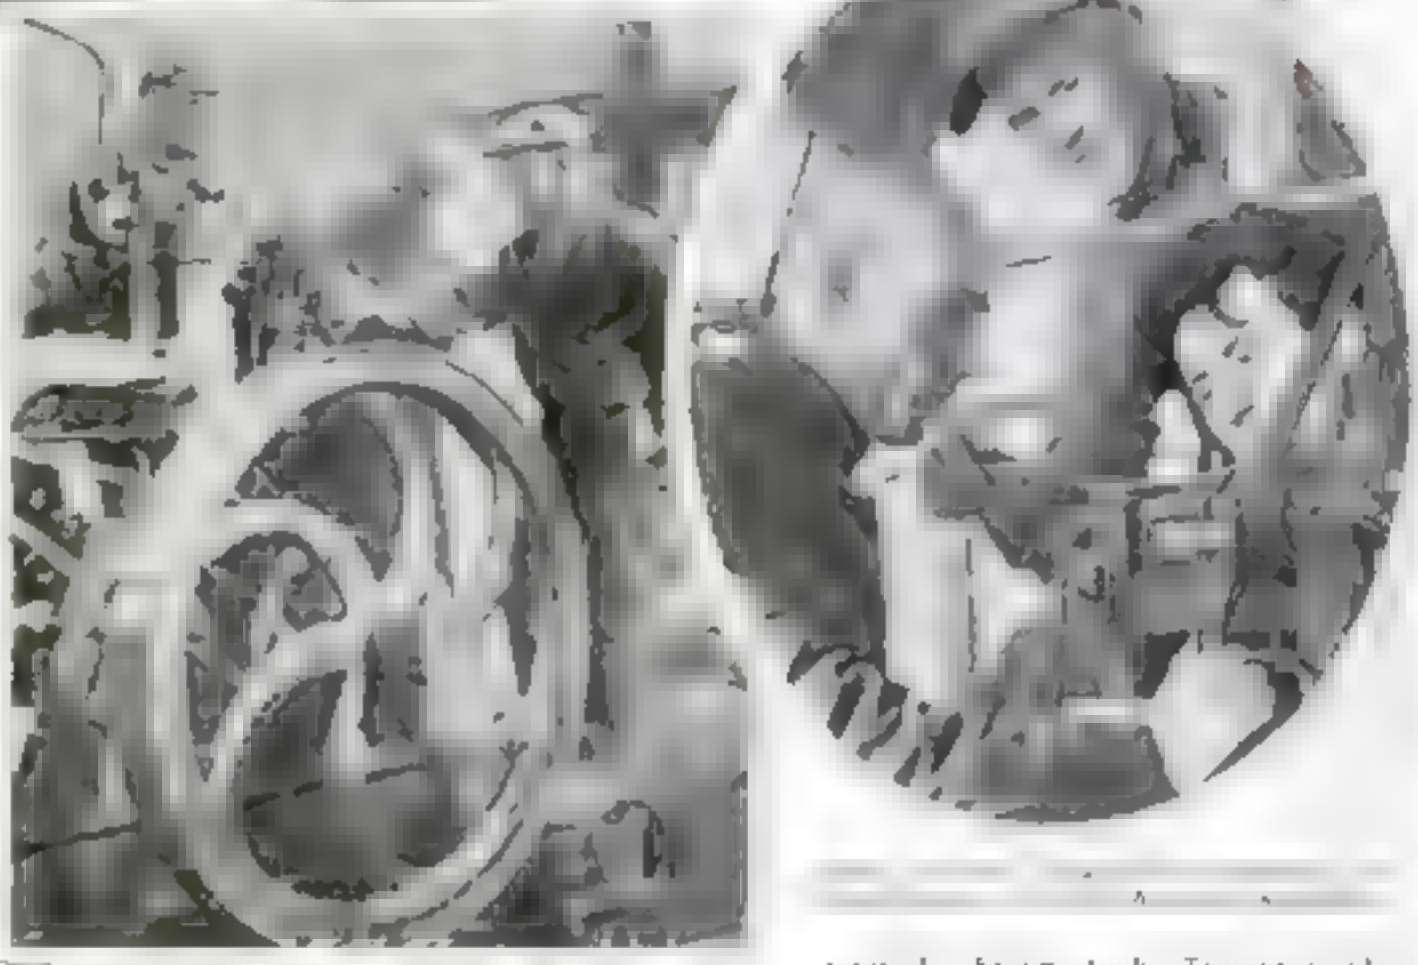

American Engineer Shoemaker at right instructing Russian workers in the way to care for an engine

[illegible] who will [illegible] bers of the state legislatures. They, in turn, would elect the Congress in Washington.

Russia, however, has a congress on the American [illegible] sense. At the top stands the Union Congress of Soviets, with between 2 and 3,000 members. This unwieldy body meets every two years, and elects, from its own number, a Central Executive Committee of 450 conferees. The conferees elect a smaller executive committee called the presidium and having twenty-one members. These are the real rulers.

Joseph Stalin, dictator of Russia, is secretary of the Central Executive Committee and a member of the presidium. He derives his great power from the fact that he is also the secretary-general and the active head of the communist party.

This has been Russia's form of government for the last thirteen years. Throughout that period, the communist party has been in power. Communism supports state ownership of land, natural resources and control of production and distribution. In a communist state, there is no private property, no private wealth, no personal profit. All citizens are either government employees or government pensioners. Russia is the only country where communism ever has been tried out on a large scale and for any length of time.

Communism is directly opposed to capitalism, the system prevailing in all other countries, by which property is owned privately and the individual reaps the rewards of his own efforts. Socialism has the same aims as communism, but it seeks to achieve them by means of legislation instead of revolution. Thus, a communist, as some one has said, is merely an impatient socialist.

The father of modern communism was Karl Marx, a German sociologist, who died in 1883. The original leaders of the 1917 Russian revolution, Nikolai Lenin and Leon Trotzky, tried to put Marx's ideas into immediate practice. The new government took over all factories, mines, railroads, and closed all private shops and banks.

Four years of civil war followed. The government could not run the industries and the railroads. The peasants refused to work the land and in 1921, a famine wiped out more than 3,000,000 people.

Russia was exhausted. Lenin admitted failure and put into effect a new system, a compromise between communism and capitalism. Trotzky, bitterly opposing this, was exiled. The government now ran industries for profit and allowed private enterprise to reestablish itself.

Shops and banks were reopened, farmers went back to work, industry revived. Stalin took Trotzky's place. The new system was a clever truce; Lenin and Stalin said again and again that Marx's ideas had not been abandoned.

After the death of Lenin in 1924, his plans were carried out by others. By 1927, the country was again on its feet. Stalin then became the man of the hour.

American engineers for Russia: M. D. Connor, C. W. Shoemaker, R. G. Harpold, K. B. Vail, J. A. Connor, R. H. Wilson.

A NEW Russia is in the making. The Soviet, almost overnight, is changing a backward country, three times the size of the United States, into one great factory. Whether the forces thus unleashed will work out for good or for evil remains to be seen. Meanwhile, this amazing experiment claims the attention of every American.

IN A series of impartial articles, of which this is the first, this magazine will give you a picture of Russia as it is today. What is happening in Russia? How are Americans helping Russia? What will success in Russia do to us in America?

—The Editor.

Above is a view of some of the giant turbines, biggest ever built, and made in America, to generate power at the Dnieper plant.

chinery.

All land in Russia now is

Here is a general view of the assembly shop, 2,000 feet in length, being built as part of a vast automobile works at Russia's "Detroit"

owned by the state. Farmers get free land grants so long as they work it and pay taxes. Last October, 6,000,000 families were working such big farms. In addition, the government now runs more than 3,000 state farms. By 1933, all farm land in Russia is to be worked either as joint community farms or as state farms.

To execute its big Five-Year Plan the Soviet has the man power, the cash, and the necessary iron, coal, oil and other natural resources.

BUT it has no officers capable of directing this great work. The Russian engineer lacks the necessary training and experience. That is where the 2,000 American engineers come in. The Soviet government admits that they are indispensable to the success of the Plan. Without them, it could not be done. In fact the Russian leaders recently issued an S O S for several thousand more Americans.

Besides, Russia has no purchasers. Forty of the biggest American firms are supplying her now. Among them are the General Electric Company, the Ford Motor Company, the Newport News Shipbuilding and Drydock Company, the Austin Company of Cleveland and New York, the Du Pont de Nemours Company, the Radio Corporation of America, and the Sperry Gyroscope Company.

Half of the American engineers in Russia are employed by these firms. The other thousand are working directly for the Soviet government. Aside from the Americans, there are at least 1,000 other foreign engineers at work, among them Germans, Italians, Swedes, and Czecho-Slovakians.

But Americans are in charge of the biggest jobs. American brains and initiative are directing these great projects, based upon a stage three times the size of the United States.

Thousands of miles from home among a people most of whose ideas are as foreign to them as their language, engineers from New York, Cleveland, Detroit, Chicago, are working a series of modern miracles. These men are not communists. They have little interest in the ideas of Marx, or the policies of Stalin, Lenin, or Trotsky. They are not interested in whether the Soviet flag is red, blue, or green. They are engineers, hired to do an almost impossible job in double-quick time, and they are doing it. They would do the same thing in Tibet, or Madagascar.

Across the River Dnieper, in the Ukraine, they are building a hydroelectric power dam that will harness more than twice the power Americans now are generating at Niagara. At the old annual fair city of Nijny Novgorod, they are building a huge automobile factory.

At a little place called Magnetogorsk, in the Urals, they are developing Soviet Russia's "Gary, Ind." the greatest iron

(Continued on page 152)

No wonder it attracts their attention. It is the first Ford car assembled at the Moscow automobile plant. In the near future parts for these cars will be made in Russia but at present they are all imported. At upper right, Russian workmen crate a motor in a car at the Moscow Ford plant

Air Hunt for Jungle Gold

This fact story of a brave flyer's quest for long lost treasure will thrill you with its romantic spirit of daring adventure—Using a parachute to land close to Mayan ruins, Captain Long defies the savage natives

By

IRA O. WELBORN

Illustrated by Hanson Booth

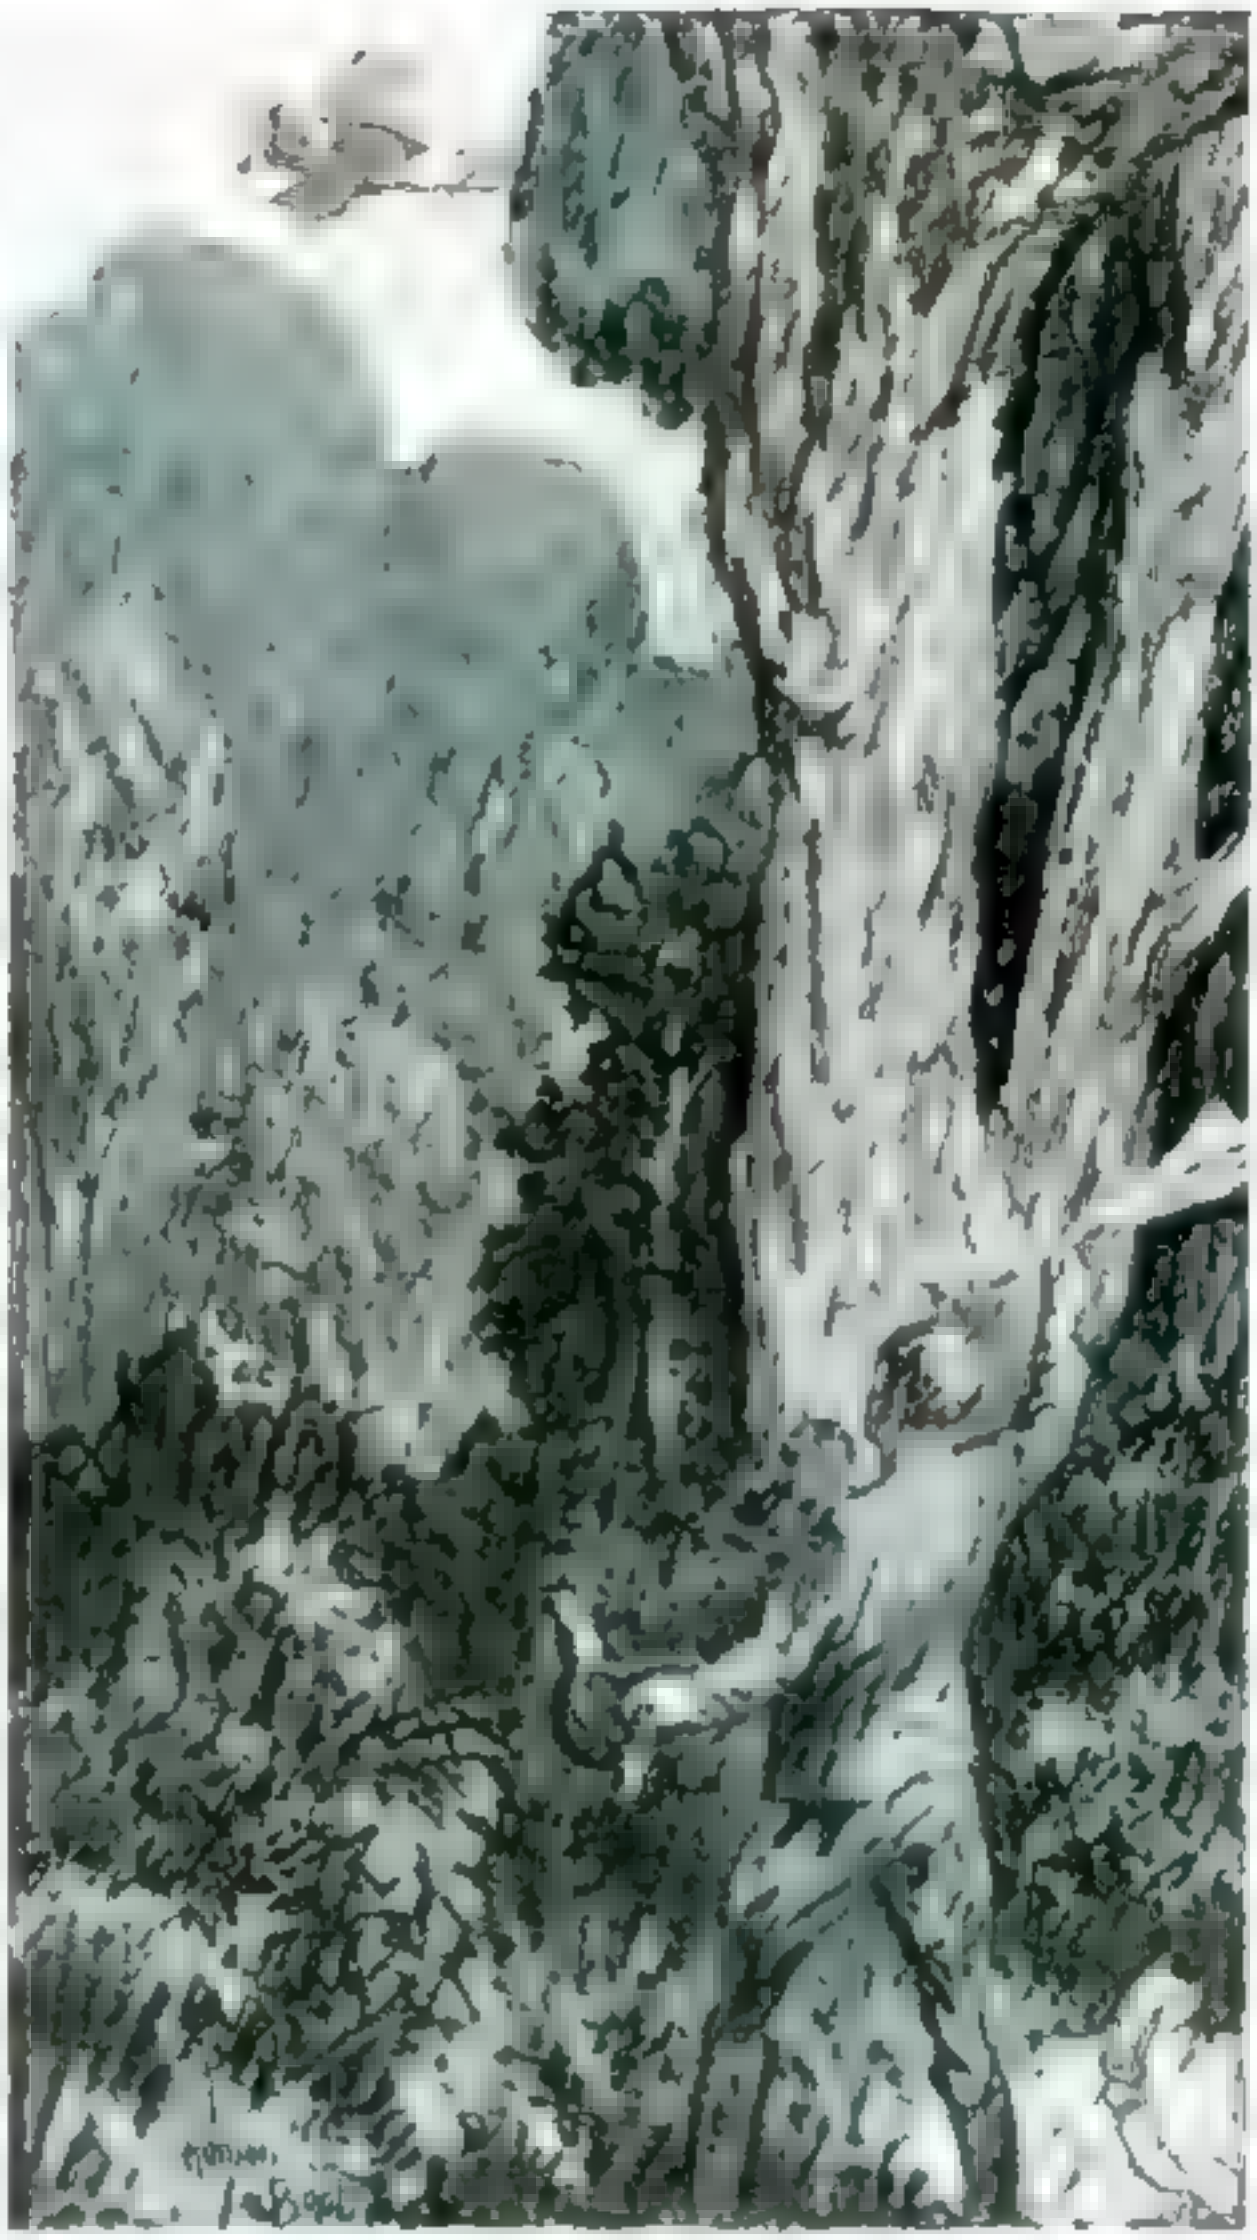

Long waved his scarf. The pilot saw him, tipped his wings, and vanished behind a tree.

BILL LONG tested the fastenings of his parachute, climbed to the wing of his speeding plane, and looked down. Behind him far to the north was Mexico City, an hour away was the little city of Tlataya, behind him the limpid Rio Mescala fought its tortuous way northwest to become the Rio de la Balsas in its leap to the gulf—and beneath him were the half distinguishable ruins of what had once been one of the fabled cities of the Mayas.

Tangled trees that tufted the ridge of the Sierra Madre del Sur all but hid the ruins. There was only a trace of the gigantic and fabulously wealthy city where the last of the Mayas had made their futile stand before the invading Aztecs hundreds of years ago

No plane could land there and live Bill Long took a deep breath. He waved a reassuring hand to the pilot and—leaped.

Treasure had lured Capt. Long, world war veteran, sportsman, and proprietor of a Dallas, Texas, flying school, to stake his life on his ability to get back to civilization from the abandoned city of the mystery people of the North American continent. In those ruins, on the most inaccessible spot of the whole lower Mexican peninsula, he hoped to find riches left in their shrines by the chiefs of that vanished race. Golden goblets. Temple gems. Probably the fabulous wealth of Montezuma who before he was slain after the invasion of Cortes, buried the wealth of his Aztec tribe in a city that had been built by the Mayas he himself had conquered.

Once before, in 1926, Long and three companions had been near the spot and had found such treasures; but natives attacked them and killed two of the party. Only Long and Al Hargrave, of Hobbs, N. M., escaped to bring back the tale of the forgotten riches. Now alone Long ventured after the treasure

The bundle of tools—the machete and pickax and double-bitted woodman's axe—snatched at Long's waist, where they were snapped by a cord. He jerked them loose and pulled the rip cord of his parachute. As it streamed out above him, he glimpsed his plane circling in a steep bank, with the pilot anxiously watching.

The heavy trees of the Sierra Madre slopes were leaping up toward him. His downward flight paused sharply as the parachute filled; he swung like a huge pendulum, watching the

Easing his hand to his automatic, Bill Long waited. Then he saw another and another of the gliding savages

trees for an opening. Slipping between two mahogany trees and through a mass of underbrush, his feet hit the ground. His parachute twisted crazily above him in a tree

From overhead came the drone of the plane. Scurrying through the tangled jungle went animals and possibly some of the savage natives. Around him was the half light of the jungle. Somewhere in the vicinity were his tools and his food—his only hope of even remaining alive—and somewhere in the vicinity were untold fortunes in gold and gems and archeological treasures

UNSTRAPPING his parachute harness, Long beat his way through the brush to a little knoll, exposed to the sky. He took from his neck the light scarf that he wore as a protection from insects. He scanned the sky until the plane, now dropping low over the trees, searched for him. He waved great circles with the scarf. The pilot saw him, tipped the wings of the plane, banked to the north, and was lost from sight beyond the heavy foliage of a gigantic tree

Bill Long was alone, the one white man in a land inhabited only by Indians—the unfriendly, reputedly cannibalistic, degenerated descendants of the slaves of Mayas and Aztecs centuries ago

There were two things Bill Long had in mind. He planned, if possible, to clear a landing field sufficiently large to enable the plane to return for him in a week and land. A close scrutiny of the jungle at the foot of the mountain range from the air had blasted all but the barest chance of that. His alternative plan was to map the section so that a land expedition, trekking from an airplane base fifty miles north, could cut through the jungle and reach him

First he found his tools. His camera was smashed to junk, his supply of food was badly damaged in the fall, but his medicine and first aid kit was intact.

A few hours' survey removed all hope of returning with an airplane. The treasure hunt was to be a fight of one man against the jungle. It was hopeless to think of clearing off land, a dozen men could not have made a landing field in a month. The tiny plateau which Long had noted four years ago was covered with a heavy growth that had sprung up, mushroomlike, since he visited the place

His maps were carefully made—he had flown throughout Mexico for the Mexican government ten years ago when he was operating the "Southern Airways" out of Tampico. He had flown many thousands of miles over the trackless jungles of Morelos and Puebla and Oaxaca, and he had made detailed notations that could not be included by the earth-bound cartographers. He would map the location of the buried city, and the route he took to return to civilization

NOW he was in the wildest jungles of Guerrero, banked on the southwest by the Sierra Madre and on the northeast by forests as dense and dangerous as the Amazonian wilds. Wilder than the untracked places of Yucatan, more nearly impenetrable than the fastnesses of Tabasco or Campeche. And peopled by he knew not what sort of natives.

There was one great advantage—a trump card that might have been played for him. That was the superstition of the natives, and the word that had been sent them by one of their deified personages, Dr. H. A. Monday, of Mexico City who had helped Long plan the trip. Dr. Monday, an archeologist of note and one of the foremost authorities on the

As Long saw it [illegible]

Maya and Aztec culture had received your [illegible] stone idol in return for making a trip far to the south of Mexico City to treat the chief of one of [illegible]

The old chief was suffering a painful [illegible] unless he was cured. Dr. Monday [illegible] He treated other native tribesmen he gained their [illegible] And bit by bit, he collected pieces of treasure [illegible] a knowledge of the far greater treasure of archeology that was awaiting him who was hardy en[illegible]

DR. MONDAY had given his word to the natives over a period of two years that "some day I will come back like a bird. I will fall out of the sky, and you will know then that I want to see all the places where you get these treasures. Or I may send someone else, and he will drop out of the sky like an eagle. Remember when you see some one drop out of the sky into your land, you will know I sent him, and you will all get very sick and die if you do not help him."

In the ancient Mayan polyglot of Cachiquel, Quiché, Zotzil, and Sutughil languages, the natives had assured their white god who made people well that they would remember.

"Pretty slim hope," Bill Long mumbled grimly to the shaggy trees on the grizzled slope that led up the hills. "My life depending on a fool superstition."

With his heavy machete he hacked his way toward the bald spot of limestone that, from the air, marked the entrance to the buried city he sought. The natives had told Dr. Monday the cave "goes through the mountains so that one may go in on the side of the shadow (the northern slope) and come out on the side of the big water (the Pacific Ocean)." They also had told him that no one who had been through to the other side had ever returned, and that no native would go all the way. The doctor could go all the way though he was a god.

It was through the entrance to [illegible] which he had found four [illegible] before that Bill Long expected to find a buried city [illegible] like the famous excavations of Uxmal, architectural ruins [illegible] with the monumental temples [illegible] Palenque or Cobon or Chichen-Itza or Quirigua, all left by the

Captain Bill Long—soldier aviator and [illegible] seeking lost Mayan treasure.

ALTHOUGH his parachute had dropped within a quarter mile [illegible] mark it took Long six [illegible] his way to the open-[illegible] cavern. He found it [illegible], limestone and earth [illegible] overgrown with the [illegible] vegetation of the region. Whether the natives had for some [illegible] it up, or whether one of the common earthquakes had [illegible] a slide over it, he could tell.

For two days he made observations [illegible] keeping his mind [illegible] of an expedition [illegible] mystery of the mountain city." Then he struck north, away from the mountains, and toward Iguala his airplane base. In seven days his plane was to return for him. If there was a landing field cleared at a designated place, it was to land. Otherwise the pilot was to know Long had taken to the jungles, in which no plane would land.

Cutting through the tangled creepers and small growth that makes travel almost impossible Long came upon a trail. There were no tracks of animals, as it was a native trail.

Should he follow it to a village and perhaps be killed, as were his companions on the fatal venture of 1926? Or should he skirt it and attempt to make his way northwestward to Iguala, the little native village from which he had flown three days before? The question was decided for him.

As he rested beneath a vine-hung tree, he saw a reddish-black body slip behind a tree fifty yards away. Easing his hand to his automatic pistol, he waited. Then he saw another and another. He was watched. Now it all depended upon the attitude of the natives.

He stepped into the narrow, winding path. Putting his hands to his mouth, he halloed the Maya signal of greeting. Again he yelled, as if he thought he was alone in the forest. Then he walked toward the point where he had seen the natives. Some of them ran. Others stood their ground, menacingly. Long, with outstretched arms, walked slowly toward them. He tried, by sign language, to tell them he wanted to follow the trail to their village, where he could eat and sleep.

Walking behind him several paces, the natives permitted him to follow the trail. It soon came to a (Continued on page 54)

Wire Men Work Radio Marvels

Seventy-six stations, scattered throughout the entire United States, are getting this program which is being broadcast from the New York studio key station.

Here for the First Time Is the Story of How Thousands of Miles of Phone Lines Are Juggled in Each Nation-Wide Broadcast

By STERLING GLEASON

IT IS 9 40 o'clock on Christmas Ev
Singers and musicians arrive
of the large studios of the N
Broadcasting Company in Ne
City. At ten o'clock, a nation-w
work is to carry a program of
carols from coast to coast

In a shanty by a roadside in
New Jersey a small boy is
playing with a lighted candle
The taper drops from the
boy's hands. Five minutes
later, the shack is in flames.

At 9 45 telephone company and broadcasting engineers test the wire circuit. There is a break in New Jersey In less time than it takes to tell here, the trouble is spotted. Flames from the blazing shanty have eaten their way through the long-distance telephone cable linking New York with Pittsburgh.

Forty linemen are sent out from the nearest telephone headquarters. They reach the scene at 9 50. Ten minutes to go. Four hundred fingers, forty pairs of pliers fly faster

to San Francisco. In the nation-wide network broadcasting there is no such word as "can't." By one of a number of round-about routes and a technique developed to the point of apparent magic, telephone engineers would have managed to bring you the

Take a case that happened few weeks before Christmas. While a nation-wide broadcast was being put on the air in New York a severe storm was sweeping across the Middle West. Breaking with full fury near North Platte, Neb., the blizzard howled across the prairie, twanging the taut lines of the long-distance circuits, and shattering poles, cross arms, and insulators in its

Suddenly the wires drawn [illegible] by their hundreds

Emergency repair men busy breaks from ending program

snow and sleet, parted. The central transcontinental line was down. And along the northern route, many miles of wire lay, a [illegible] ice-clad tangle, in a raging Mon[illegible] a blizzard.

Before the thousands of listeners realized that the program was being interrupted, operators knew what had happened. Technicians, seizing switchboard cords, plunged together new combinations of circuits. In an instant, another route was created. On sped the symphony music from New York to Chicago, to Kansas City, to El Paso to Los Angeles, and north to San Francisco and Seattle!

THE program was interrupted for only a moment; yet for a couple of weeks, until crews of linemen could repair the damage, listeners in Denver, Colo., without knowing it, received their New York programs by way of a circuit coming *east* to them across the Rockies.

One morning at eight o'clock, a network program was to go out from New York through Chicago to Omaha, by way of Des Moines, Iowa. Fifteen minutes before broadcast [illegible] usual. Everything was shipshape. A telephone man received the flash [illegible] failure between Des Moines

A CYCLONE [illegible] swooped down upon the region, tearing up miles of telephone poles. In a twinkling, engineers got busy. They rerouted the circuit from Chicago south to St. Louis and Kansas City and then north to Omaha. The new connection was ready at 7 59.5—four and a half minutes after receipt of the flash and one half minute before broadcast time.

Such magic is only part of the amazing

O. B. Hanson, center, manager of engineering operations of National Broadcasting Co., is checking the network circuit.

[illegible] modern than broadcasting, possible by myriad acoustic devices ranging from gas-filled cubes that sound warning gongs when a break is impending to trouble-locating instruments that spot wire faults hundreds of miles away with incredible precision.

THIS entire development is less than four years old. In the early days of radio, there was only one method of broadcasting. A phonograph record was played, a soloist sang a song, or a speaker made an address in a studio, where the program also was put on the air. Then came remote control and, with it, the wire line. Someone realized that, if a microphone were put, say, in a New York theater and a telephone wire run from there to the studio, programs could be varied and greatly improved. At first, the length of these wires was only a few city blocks.

Meanwhile, the power of transmitters was increased, first to 1,000 and then to 5,000 watts. To get away from interference due to tall buildings and other steel structures, the broadcasting stations were moved some distance into the country. But the studios remained in the big cities. Again, the telephone came into play. The programs were, and still are, carried from studio to transmitter by wire. These lines, however, seldom are longer than fifty miles.

Since then, radio has grown rapidly from a novelty in entertainment into a huge, nation-wide

(Continued on page 130)

Poisons Threaten You

A "READ the label" campaign is being waged throughout the country by the Federal Food and Drug Administration. Each year, over drug store counters, millions of bottles and packages of poison-containing medicines are sold.

Every day, thousands of Americans swallow such preparations without knowing what they contain and without even reading the label to see. In practically every household medicine chest there are poisons, an overdose of which may prove fatal. According to experts, "there's no place like home—to get poisoned."

Dr. John Aikman, of Rochester, N. Y., recently pointed out, in an address before the Rochester Pediatric Society, a particular menace in this situation. Often, he said, sugar-coated tablets and pink pills containing strychnine, are placed on the lower shelf of a medicine cabinet.

The deaths of a number of children under five have been traced to half-empty bottles of such tonic pills which had been left within their reach. The children mistook them for candy. Dr. Aikman advocates a law requiring "POISON" to be printed across the labels of all drugs having even small amounts of strychnine.

Besides this poison, many other deadly chemicals are used as ingredients of patent medicines that stock the shelves of household cabinets. Analysis of hundreds of nostrums reported by the American Medical Association and other organizations reveal the wide variety of active poisons they contain.

For example, a cough medicine had for two of its ingredients chloroform and sulphuric acid, the latter a burning, corrosive poison. A pneumonia preparation contained carbolic acid. A liver, stomach and kidney remedy had in it arsenious acid, containing arsenic, and hydrochloric acid. "Consumption cures" contained nitric acid, arsenic, belladonna—the brain-affecting poison from the plant of the deadly nightshade—and strychnine, a poison that attacks the spinal cord.

COLD and grippe tablets contained acetanilid and aconite, powerful heart-depressing poisons. Liver pills had aloes, a virulent plant bane, in them. Nerve tonic contained potassium bromide, a poisonous sedative, laxative tablets, acetanilid, headache wafers, acetanilid, caffeine, and the two heart-depressing coal-tar drugs, antipyrine and phenacetine; cholera mixtures, opium, chloroform, ether and alcohol.

Soothing and teething syrups put on the market for babies had as ingredients morphine, alcohol, heroin, chloroform, opium, and calomel, a form of the poisonous chloride of mercury.

While the law requires that such poisons be listed on the labels of the medicines, this means little to the average user who has no idea how large a dose of a given poison is safe. These poisons are often beneficial in small doses but fatal in larger quantities. Those who fol-

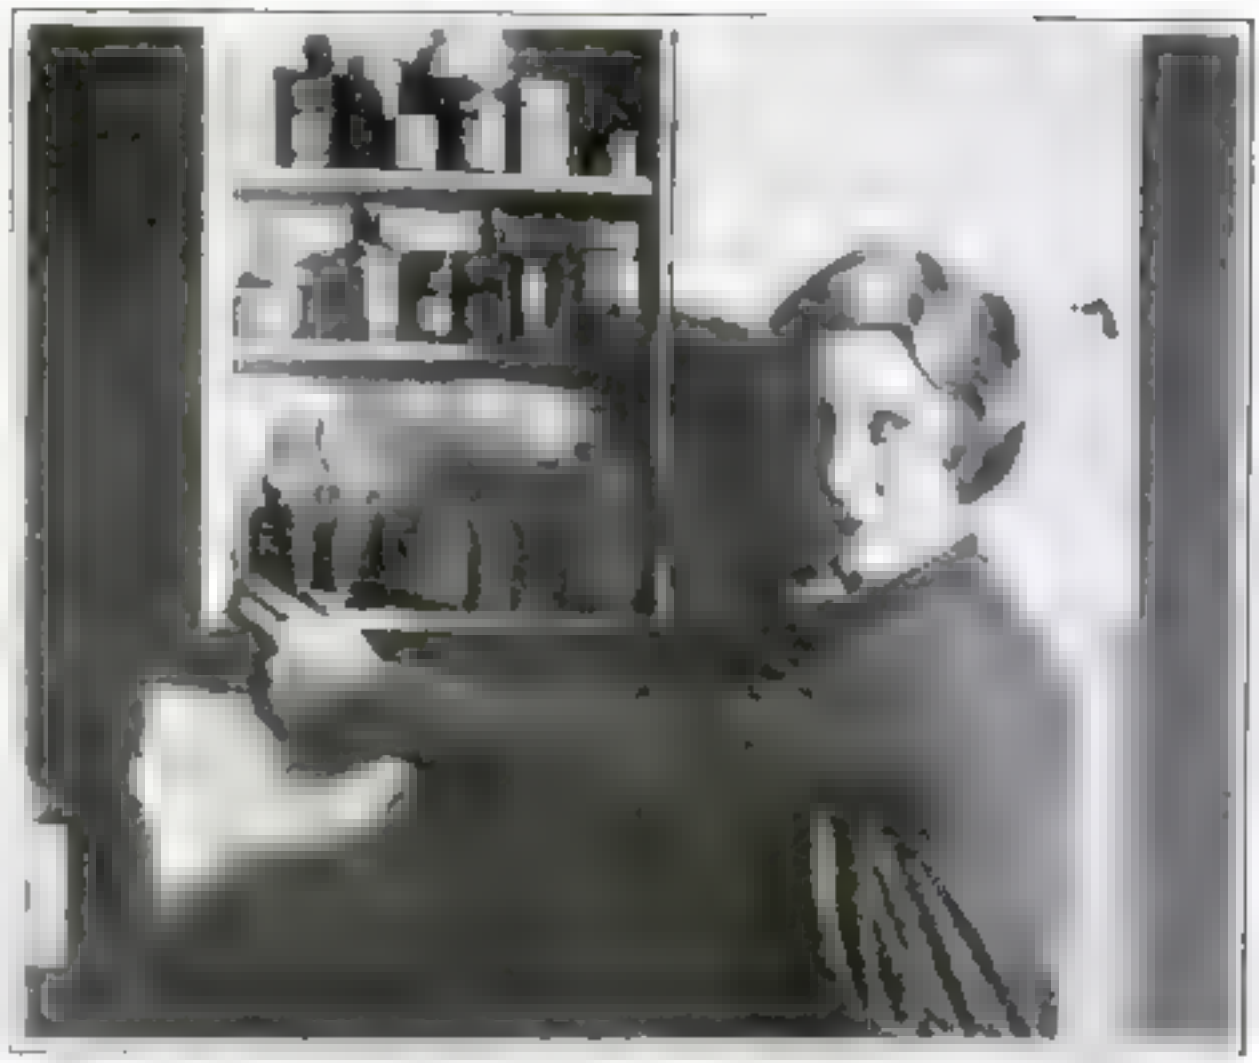

When taking a remedy out of the medicine chest watch what you are doing. If your attention is distracted, you may easily seize the wrong bottle and swallow poison instead of medicine.

In Government laboratories, chemists work to guard the public against poisons and impurities. In circle, child chewing painted toy may be poisoned by lead in the paint.

at Home

Common Cures Contain Dangerous Chemicals and Carelessness in Their Use Is Blamed for Deaths—Read Labels, Warns Government

By EDWIN W. TEALE

the throbbing pain in the head of the sufferer. The usual dose is three grains. A woman in a New England city, in her anxiety to recover, took two of these double-strength powders, instead of one, with fatal results.

On the label of the powders the amount of acetanilid they contained was printed. So the company making them was not liable under the Pure Food and Drug laws. These Federal statutes do not regulate the amount of poison a medicine can contain. They require only that the actual amount be printed on the label. If too much of a deadly drug is used, and fatal results, civil suit can be instituted against the company by relatives of the deceased. Consequently the common practice of manufacturers is to place a little of a harmless ingredient, rather than risk putting too much. They would rather not cure than kill.

Besides putting the correct amount of poison on the label, the manufacturer is required by the Pure Food Law not to print any misleading statement about his product. He cannot label a poisonous concoction "Harmless." But with the

is required to tell the truth, he is not required to tell the whole truth. He does not have to label it "Poisonous."

Most of the activity of the Food and Drug Administration in relation to poison-containing drugs concerns misbranding. Not long ago, calcium wafers containing strychnine were widely advertised simply as "Calcium Wa-

[redacted]

wafers contained n[redacted]g but calcium.

In another cas[redacted]ity of "harmless headache powders were destroyed beca[redacted] they were labeled "Does not contain a poisonous drug," when they actually had five grains of acetanilid in every powder. Headache and anti-pain tablets that depend upon coal tar poison drugs for their effectiveness "depress the heart, injure the blood, and produce a habit," it is pointed out. Again, the makers of a bromo-aspirin product were charged with misbranding when they labeled their product: "Each tablet contains one grain of acetanilid," when it actually contained more than one grain.

A few weeks ago, a wholesale drug concern in New England was fined $500 for misbranding two poisons, digitalis and nux vomica. The Government officials proved that the digitalis was only one half as strong as the label indicated, but that the nux vomica, a deadly strychnine poison that produces suffocation and has caused death in five minutes, was almost twice as strong as the label stated. If it had been used on the basis of its label, fatalities might have resulted.

Only an extraordinary twist of fate prevented a tragedy last fall in Washington, D. C., when a bottle of lethal aconite was sold under a wrong label. The Pure Food and Drug Administration sent to a drug store for bottles of several drugs to analyze in its laboratory. One bottle was marked "Tincture of Aconite," another "Tincture of Digitalis."

When chemists made their tests, they discovered that a clerk had mixed the labels and that the strong aconite was in the bottle marked "digitalis." If it had gone into a family medicine chest instead of by rare good fortune into the testing laboratory, it would have carried death with it.

Since the Pure Food and Drug Act went into effect, in 1907, the Government has instituted more than 17,000 seizures and prosecutions in its program of insuring correct branding of drugs. But as long as the maker of a medicine places the correct amount of the dangerous elements in it on the label, there is comparatively little interference with the ingredients he chooses to use.

And there is no restriction upon who can concoct patent nostrums. A doctor or a druggist must have specialized training and a certificate attesting to his competence, but no training, either medical or pharmaceutical, is demanded of the manufacturers of patent drugs. A mason who wants to lay down his trowel, or a farmer who becomes tired of his plow, can begin mixing drugs and poisons together and selling them to people who are dangerously ill.

Some years ago, a blacksmith set himself up as an expert on kidney and bladder

(Continued on page 134)

Sugar-coated to [illegible] taste like candy and so they should be kept out of reach of children

Hard Work Made Me a Flyer at *Sixteen*

America's boy aviator tells you in this thrilling article how he rode with Lindbergh, won three licenses, and set altitude record

By PAUL CLOUGH

In the cockpit of the "flying bathtub" the Art-ist paint Paul flew to 9,515 fee

WHEN I was a little child [illegible] up view of an airplane. A [illegible] ode out bicycles to [illegible] and [illegible] ... and. [illegible] over I [illegible] on my bike and raced for the field. And I stayed there until the planes were put away for the night, and many a time I got home late for supper.

I knew I was going to fly some day. But I had no idea I would have the good fortune to ride with Lindbergh, make a solo flight after three and a half hours instruction, obtain three pilot's licenses and establish an official American altitude record before I got to be a junior in high school.

That first visit to Roosevelt Field took place about three weeks before Charles A. Lindbergh landed in his flight from San Diego in the *Spirit of St. Louis*. I saw him come in. But I missed the take-off for Paris. It was made early in the morning while I was home in bed and fast asleep.

The hangar I haunted most at the field belonged to the Fairchild Company. The mechanics used to let me wipe oil and mud off the wings of the big yellow monoplanes, hand them tools, and run errands. I made myself as useful as possible and in return they answered some of the million questions I asked. If they had stopped to answer them all they would have had time for nothing else. I read everything about flying I could lay my hands on. The articles that gave me one of the biggest thrills was "Learning to Fly with Larry Brent," which I read in POPULAR SCIENCE MONTHLY just as fast as the magazine came out.

I had been appearing at the hangar every day for six weeks when Dick Ivans, one of the flying instructors who is now flying mail between Los Angeles and Bay City, Mich., gave me my first ride in the air. We were up ten minutes, reached 2,500 feet, and made 120 miles an hour. I got all out of wind picking home as

Randy Conlow, left, in a Standard biplane is giving Paul Clough last minute pointers about the "bombing" they have planned.

Early in his experience at the airport Paul learned to take nothing for granted, so here he is cramming a gage on a school plane

MORE and more as planes are developed and transportation leaves the ground, American boys and girls will seek careers in the air. How they can best learn this business and at what age to start are told in this article by the amazing boy who at sixteen is a licensed pilot. You fathers and mothers should read what young Clough has to say, that you may know what to expect when your children also take to the air.
—The Editor.

fast as I could to tell the folks the exciting news.

When I announced I was going to learn to fly, there weren't any cheers at home. Mother thought it was too dangerous and Father tried to discourage me by saying I would have to pay all the expenses myself. When you are thirteen several hundred dollars seems a lot of money. But I said: "All right," and began saving every cent I could get for a "flying fund." The youngest that anybody can get a pilot's license is sixteen. So I had three years to save.

A few months after this, I had another ride that made me the envy of all the kids I knew. It was with Colonel Charles A. Lindbergh. Soon after the end of his "Good Will Tour" he visited Roosevelt Field to try out a new Fairchild-Wasp cabin plane.

One of the pilots at the field told him about me and said I was so interested in aviation that they couldn't keep me from underfoot. "Lindy" asked me to go along. We were up for twenty minutes and landed in a rainstorm. I "walked on air" for a week afterwards.

Other famous pilots [illegible] were Martin Jensen who flew the *Miss* from California to Hawaii, Rudy Erisman [illegible] known to all POPULAR SCIENCE MONTHLY readers, and Capt. [illegible] Culver who piloted [illegible] *York* around the world with [illegible] Means in [illegible].

Culver gave me my first cross-country experience, taking me along on a flight to Bailey Field, N. J., fifty miles away. We flew in bright sunshine above a white clouds that looked like hills cov-

Paul's work at the field wasn't all [illegible]. Here he is helping mechanics overhaul an engine, learning as he works.

ered with snow. On another cross-country trip with Everett "Chan" Chandler, one of the Roosevelt pilots, we flew under a low ceiling of clouds above Long Island. Once we roared just above a poultry farm, going 100 miles an hour. The chickens ran for dear life. I had a glimpse of half a dozen of them trying to get in a hole in a coop just big enough for one. They had their heads inside and were kicking and pushing, all trying to get in at once.

On every flight I learned something. I began keeping a log book in which I entered each flight, giving the date, pilot, purpose, and time in the air. By the time I had saved enough money to [illegible] flying course, I had [illegible] one hundred hours to my credit, most of it passenger [illegible] pilots had taken me up, and I had ridden in two dozen different types of planes. The fact that I weigh only a little over one hundred pounds and can be tucked in almost anywhere helped get me free rides.

Dick Pears, after my first ride, warned me against going up with a pilot I didn't know. He gave me some simple rules for picking a safe pilot and plane which may help others. They were:

Don't go up with students who have just recently won their pilot's licenses.

Don't go up [illegible] who have not flown for a long time. Practice is needed to keep a pilot a safe flyer.

Army-trained flyers are among the best, but any pilot with 1,000 hours in the air and several years' experience is a safe bet. As to planes,

See that the registration number has the letter "C" before it. This indicates the craft is licensed to carry passengers. Planes with numerals only are merely registered and are not [illegible].

Don't go up [illegible] bad weather.

The safest [illegible] way is to ride in planes operated by a [illegible]-managed airport. Here the [illegible] are given expert care and parts are thoroughly investigated before they [illegible].

Are the [illegible] ailerons on the Arrowca all right? Paul is trying to find out.

Husky" Fruelen, left, is the man who taught Paul. Right, Paul as field checker

WHY CAMPBELL'S CAR IS THE WORLD'S FASTEST

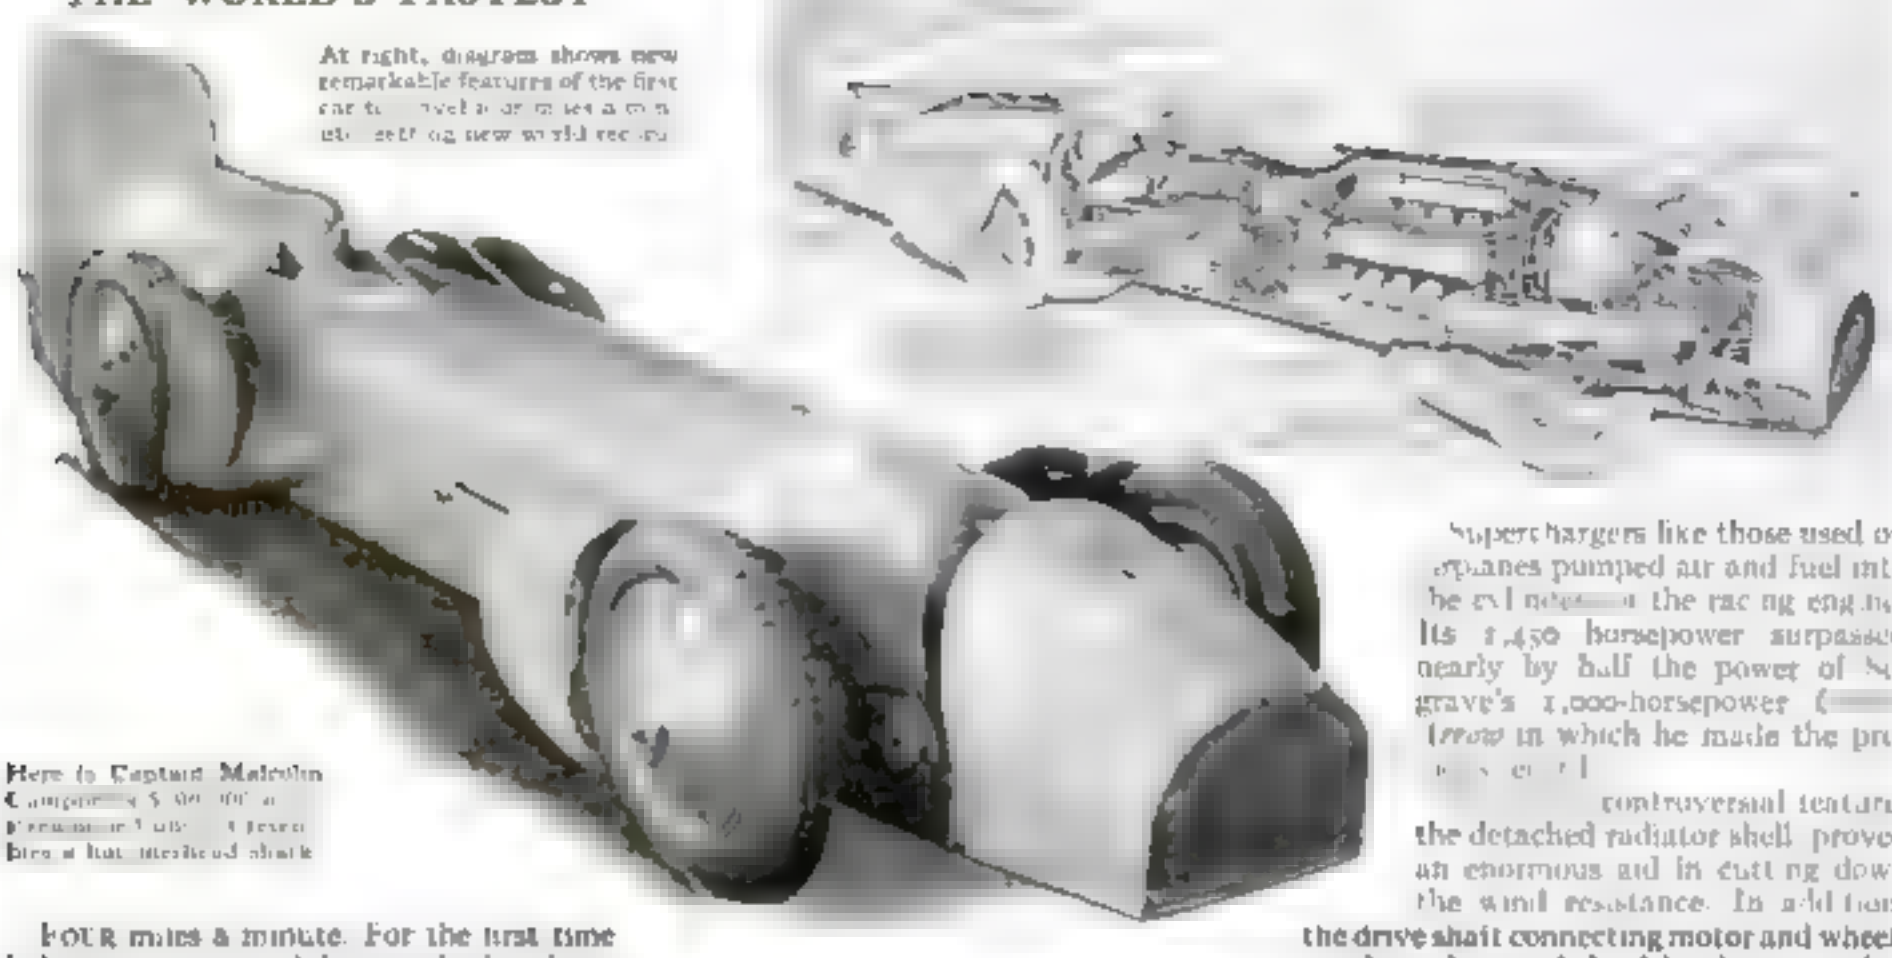

At right, diagram shows new remarkable features of the first car to travel at or more than [illegible] new world record

Here is Captain Malcolm Campbell's [illegible] Bluebird [illegible] streamlined shark

FOUR miles a minute. For the first time in history an automobile recently shot down the smooth sands of Daytona Beach, Florida, at this staggering speed after a 5½ mile running start.

The car was Capt. Malcolm Campbell's arrow-shaped *Bluebird II*, and its official record a shade over 245 miles an hour, the average of two successive runs. The British speed king, famed as a world war aviator and later as a racing auto driver, surpassed by fourteen miles the 231-mile-an-hour world's speed record of one of his countrymen, the late Sir Henry Segrave

Just how Campbell's aluminum-sheathed car with its grotesque tail fin was able to smash a mark of two years' standing is explained by the diagram on this page. Terrific power, supercharged motor, and streamlining of the most radical type were mainly responsible, plus, of course, the British ace's cool courage.

Superchargers like those used on airplanes pumped air and fuel into the cylinders of the racing engine. Its 2,450 horsepower surpassed nearly by half the power of Segrave's 1,000-horsepower [illegible] *Arrow* in which he made the previous [illegible]

controversial feature the detached radiator shell proved an enormous aid in cutting down the wind resistance. In addition the drive shaft connecting motor and wheels was looped around the driver's seat so that the car's body hung only three inches from the ground.

Campbell had no competition at Daytona. The only possible American competitor, a 48-cylinder, 4,800-horsepower machine being built in California by Peter de Paolo and Harlan Fengler, noted American race drivers (P.S.M., Dec., '30, p. 72), will not be completed in time to race this year.

EDISON GROWS TWELVE-FOOT GOLDENROD

GOLDENROD twelve feet high is a plant wonder recently exhibited by Thomas Alva Edison, famous electrical wizard. It is one of the by-products of his recent experiments at Fort Myers, Fla., in search of a domestic plant from which rubber can be extracted in commercial quantities. With this goal in mind, Edison has been raising and cross-breeding thousands of plants within the last few years on his experimental station at Fort Myers. The twelve-foot goldenrod is one of the results.

Other promising shrubs have been developed, especially those of the milkweed family, in the rubber hunt. Great possibilities are held out for the guayule plant, a weed that grows wild in Mexico and has recently been cultivated for rubber on a commercial scale in the western United States

Thomas Alva Edison, left, exhibits a stalk of his 12-foot goldenrod grown to produce rubber

RUGS TO HEAT HOME

HEATING homes by rugs, according to some building experts, soon may be accomplished. They feel that advances in the field of electric heating will eventually displace steam, water, or vapor radiators now in use. When this occurs they suggest that a development of the electric pad, decorated like present rugs, and of varying sizes, may be employed to heat homes.

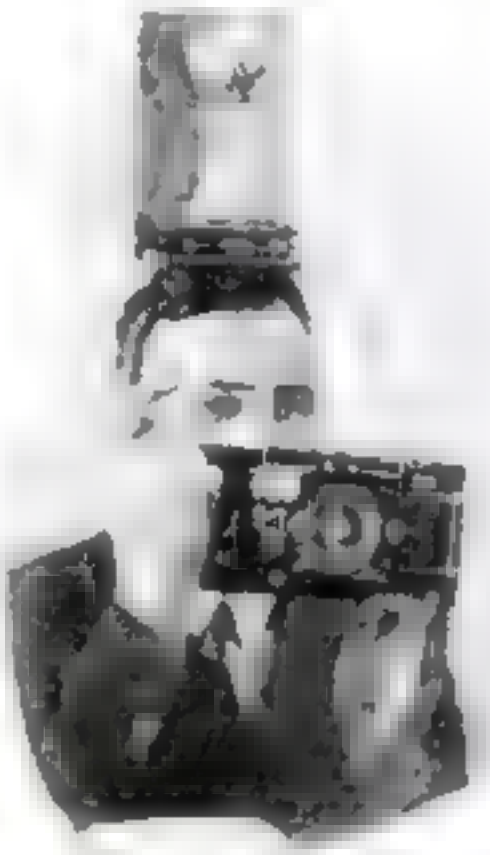

FLASHLIGHT MOUNTED ON HEAD TAKES PHOTOS

A FLASHLIGHT lamp mounted on his head is the novel idea of a Washington, D. C., photographer. It leaves both hands free to operate the camera. A flashlight bulb of recently developed type is mounted on a base containing the battery. This is held in position by a chin strap. A wire connects the lamp with the shutter, which closes an electric circuit, setting off the flash at the instant the shutter opens.

English Railway Car Calls for Passengers at Home

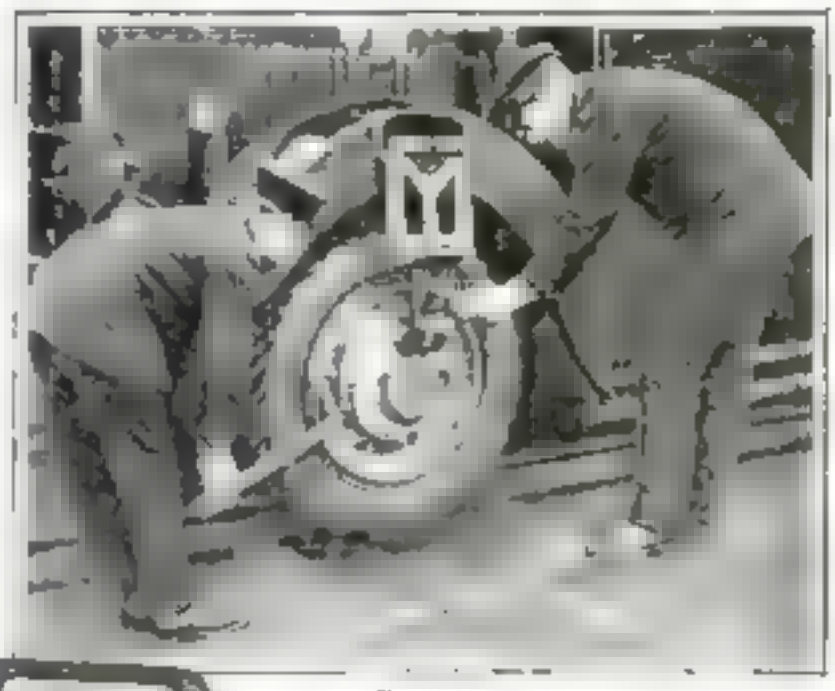

The road wheels are before entering [illegible] are lifted out of the way and [illegible]

[illegible] dwellers may [illegible] the train to [illegible]

An unusual vehicle tried out recently by an English railway calls for their own doorsteps, cle[illegible] at the railway station for the trip to the city, and then [illegible] delivering the passengers at their [illegible] places.

Dubbed the "Ro-Railer," the first of the new vehicles is a twenty-six passenger affair. Its 120-horsepower gasoline motor gives fifty-mile speed. Its general outline resembles an auto bus. But glass-enclosed driver's cab and double sets of wheels are conspicuous features.

When the car reaches the tracks, it is driven forward until the inner, flanged wheels come in contact with the rails. Then the road wheels are drawn up and locked.

Increasing competition of buses has led the London, Midland and Scottish Railway to experiment with the "ro-railer" on the portion of its line between Redbourn and Hemel Hempstead.

The rail is set in a run onto the rail at any point where the road is level with the track. Flanged inner wheels catch the rails

NOISE CAUSES BAD EYES

City dwellers may not be able to see as well as their country cousins on account [illegible] keen [illegible] they travel to and from their work on roaring subway and [illegible] trains.

WHEN YOU SEE STARS TWINKLE—THEY DON'T

Have you seen a star twinkle? Then you were seeing an optical illusion, according to Dr. John A. Anderson, of the Mt. Wilson Observatory in California. Actually stars do not twinkle.

Tiny vortexes or whirlpools, only a few feet in length, in the higher parts of the earth's atmosphere are responsible for the apparent twinkling, he declares. They interrupt the beams of starlight as they drift across the path of its rays.

Astronomers of Mt. Wilson Observatory are building an instrument that will enable them to gage the height of the "air whirlpools" that make the stars twinkle.

NEW FOLDING PLANE FOR SUBMARINES

Substantial and permanent seems the rigging of this new Navy seaplane recently tested near New York City. Yet it folds up into so small a bundle that it can be stored in an eight-foot tube. The Navy's latest "mystery ship" is designed to be carried aboard a submarine, with its tubular, watertight "hangar" clamped to the upper deck of the undersea craft. Details of the novel craft's design are a military secret.

This is not the first time that the Navy has tested folding planes for submersibles (P S M. Dec. '26, p. 24). The newest model however designed by Grover Loening is different from the others having a pusher power plant raised above splashing waves, making the folding feature doubly ingenious because of its difficulty.

This is the new submarine plane of the United States Navy. Details of its design are military secrets, but it is known that it can be folded to go into an eight-foot tube

LIGHT IN EACH HAND AIDS TRAFFIC OFFICER

HUMAN traffic towers [illegible] in some country districts [illegible] where permanent stop and go [illegible] have not yet been installed. M[illegible] Hutchman, of Derbyshire has [illegible] set of red and green hand traffic [illegible] night use. One is strapped to e[illegible] traffic officer's [illegible] For the night use the [illegible] When the [illegible] green.

[illegible]

Dry batteries light the red and green lamps in officer's hands as he gives signals to traffic

Dropping a coin in the slot gets the shopper the desired [illegible] grocery store [illegible] operates [illegible] make change

COIN-IN-SLOT GROCERY STORE RUNS ITSELF

[illegible]

MARCH HAS A FAULT THAT MEANS COLDER

IF EARLY March winds follow February's gradually rising temperature, don't lose hope of an early summer, according to Dr James H Scarr, New York City's official weather man.

His examination of weather records shows that only three weather phenomena recur from year to year with reasonable predictability. They are the 'January thaw,' the 'Thanksgiving freeze,' and the "March fault."

CHILDREN HAVE 2,124 WAYS TO ANNOY

WHEN thirty-two parents were asked by Dr Mandel Sherman, director of the Child Research Center, Washington, D. C., to keep a record of the ways in which their children annoyed them, they turned in voluminous notebooks filled with entries. A count showed that the children had contrived to find 2,124 different ways of annoyance, each in practically universal use.

NEW PLANE LANDS WITHOUT PILOT'S AID

HENRY WHITE, test pilot, waved his hands aloft as he grounded a plane the other day at Glenn Curtiss Airport, North Beach, N. Y. Without a hand on the controls the plane made a perfect landing.

This new three passenger safety plane is the invention of Albert Adams Merrill, White Plains, N. Y., accountant and aerial experimenter. It comes to earth automatically at the proper angle and speed.

When he wants to come down, the pilot turns a handwheel that revolves [illegible] with wings to an increased tilt or 'angle of attack.' Then he cuts off the motor.

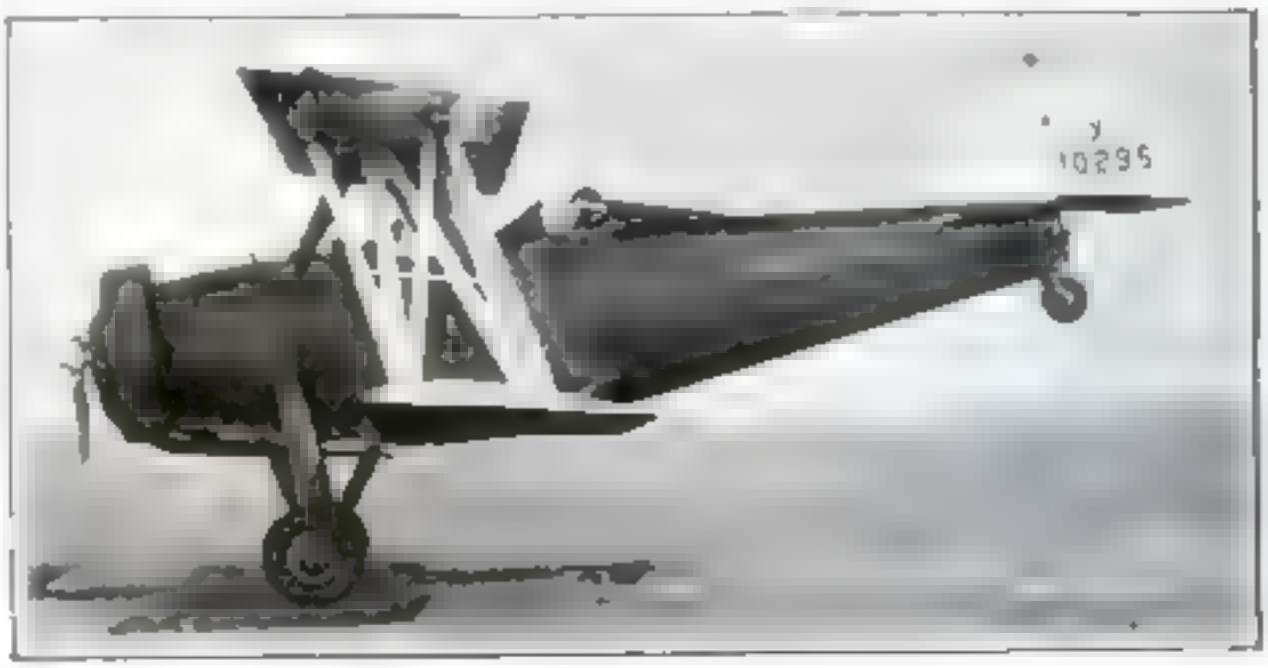

This foolproof plane is designed to take the danger out of landing. Note that the test pilot, Henry White, is holding his hands up to prove that he is not touching controls.

This remarkable picture of Maurice Poirier s model rocket plane was snapped in California during one of its successful test flights. In a later test it crashed and was destroyed, but Poirier is now planning to construct a larger craft.

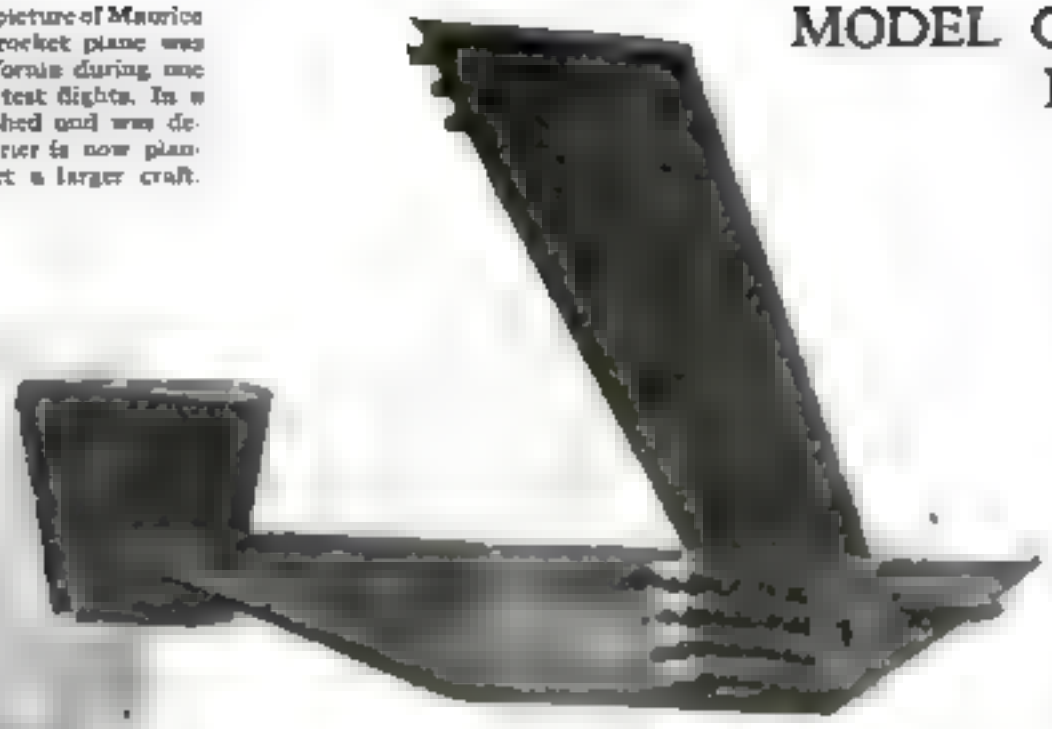

MODEL OF ROCKET-DRIVEN PLANE FLIES IN TEST

Many inventors dream of rocket airplanes, but few build or fly anything resembling them. An exception was Maurice Poirier, of Burbank, Calif., who started work on a model several months ago (P. S. M., Dec. 30, p. 56). He recently fitted a ten-foot model of his craft with an imposing battery of rockets and flew it repeatedly in successful trials. Finally, in a public demonstration, Poirier saw it crash at the bottom of San Francisquito Canyon.

Despite this setback, Poirier visions a larger craft of twenty-five-foot wing spread, able to carry a man, and propelled by liquid rockets. The secret liquid ingredients, he declares are extracted from weeds obtainable only in Europe. Eight-two rocket nozzles would give the ship terrific speed

At right, Maurice Poirier, of Burbank, Cal. with his model rocket-driven airplane. His next machine is to be big enough to take a man up on its flights.

ELECTRIC LIGHTS PAGE GUESTS IN HOTEL

GUESTS at a new hotel recently opened in London, England, are paged by their room numbers instead of by name. They do not, however, hear a bell boy rushing through the lobby, shouting for them. Instead, an electric indicator on a wall of each public room flashes their number. A notice above the indicator box states that there is a message waiting for them at the cashier's office.

Four sets of numbers can be flashed by each indicator, so four guests can be paged at one time. Guests, it is said, find this system an improvement over the old method of paging by bell boys, since the latter often mispronounced their names so that they were unrecognizable. The lights come on in each of the public rooms simultaneously, so a guest has no excuse for missing a call, provided he can remember his room number and sees the signal.

A guest in an English hotel is watching the call board which now does the paging instead of boys. Four persons may be paged at once.

KITES USED AS RADIO TOWERS IN TRANSMISSION TESTS

KITES serve the purpose of radio towers for experimenters at the radio research station, Slough, England. When they set out recently to find the causes of erratic radio transmission in different localities and at various hours of the day, it ordinarily would have been necessary to erect a radio transmitting mast at each point of test.

Instead, the experimenters send aloft a kite with an ingenious transmitter weighing little more than a pound. Eight dry cells furnish current for its single tube. A hundred feet of aerial wire dangles from the kite. The automatic signals may be picked up at a distance of half a mile in receivers on the ground. At the end of its tether, the kite transmitter soars to a height of 300 feet above the earth. It is shown being "landed" in the photo at left.

Radio experimenters at Slough, England, are using kites as towers in the tests they are making as to cause of erratic transmission in various localities and at different times of the day

High School Boys Build Home

Here is the completed house that the High land Park students in the high school built as part of their vocational training course. Fifty-five boys worked at this building from plans that they drew themselves. When finished the dwelling was sold immediately for $13,500. One house like this is built each year

Cold weather could not stop these high school builders. At right is the concrete mixer which was kept in operation by heating the materials before they were poured into it. The boys were kept warm by the hard work

Shaking the basement and pouring in the concrete for the foundation was a laborious operation, but the boys did it willingly to get experience.

At right, the walls and the roof have been framed and considerable part of the sheathing has been nailed on. This was hurried so work on the inside could be carried on after severe winter weather set in.

Two-story house raised as part of educational work at Highland Park, Ill. All labor except plastering is done by fifty-five pupils.

THE average high school boy might be content with building tables and chairs in his shop courses, but pupils of the Deerfield-Shields High School, at Highland Park, Ill., recently completed a whole two-story house. So well did they build it that it sold immediately upon completion for $13,500.

Fifty-five students, each outfitted with a pair of hickory striped overalls, a zigzag rule, and a pencil, reported for this unusual assignment in their vocational course in building trades. They were armed with plans of their own design. Their instructor, Walter E. Durbahn, organized them into squads according to their choice of work, each directed by a student "foreman."

First, "masons" laid the foundation and then "carpenters" built the framework of the dwelling. "Bricklayers" installed the chimney and living room fireplace. "Plumbers," under tutoring of a journeyman, put in the necessary piping, and "electricians" placed conduits and outlets. Only the plastering was left to outside hands, the boys did all the rest themselves.

There were special individual jobs, too. The oldest and most skilled lad undertook to build the staircase, afterwards praised by skilled carpenters. A young furnace man installed the heating plant and laid concealed air ducts along the ceiling of the recreation room in the basement, the "shaw" room of the house.

The new dwelling is not the first that Highland Park high school boys have built. They construct one each year as a part of their vocational training. School heads consider this an eminently practical way to give the boys real trade experience of great practical value. The people who live in the houses have no especial sentiment about "helping the boys," but appreciate a good home when they see one that has been carefully and honestly built.

Almost completed. The finishing touches are being put on the exterior of the two-story house. Young painters applied the protecting coats of paint while the landscape gardeners graded the yard and planned the garlands and flower beds.

Above is the interior of the portable workshop which made it possible for the high school boys to do their building well and rapidly. In the picture can be seen circular saw, jointer, bandsaw, heater and tool cabinets.

The youthful carpenters didn't even forget helping ping pong table which is here seen set up and ready for action. This of course was placed in the recreation room, one room in the house which the boys took especial delight in planning and fitting.

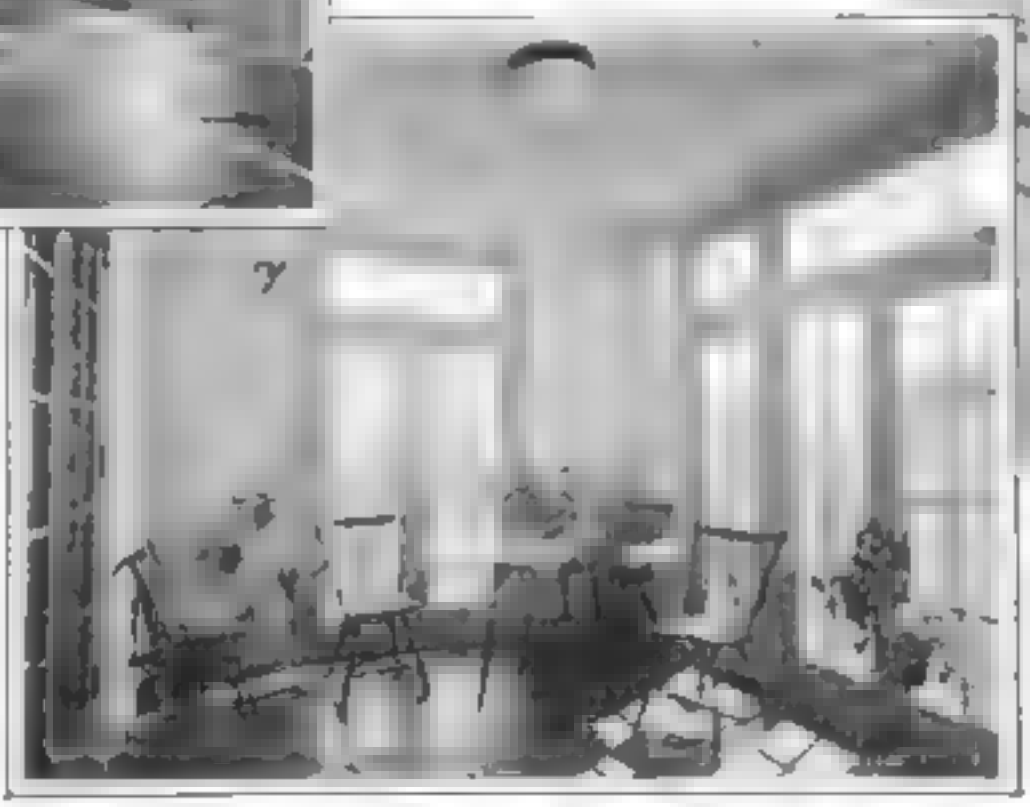

At right, a cosy nook in the sun porch. This outside room is practically glass-inclosed with wide French windows and has been fitted up to give it an air of comfort. Notice ceiling light with closed globe and the transom effect in windows.

The most skillful and advanced of the high school boys were put to work on the staircase as building stairs is a tricky job for even an expert. Above, Irving Garing and Burton Berube are just completing the stairs in this high school home. Professionals examined their work and praised it.

CAMERA CATCHES PLANE HOVERING OVER TRAIN

THE roar of its powerful motors blending with the muffled beat of the big express engine's exhaust, a giant transport plane drones along close above a speeding passenger train. Catching a moment when plane and train were close to each other, a photographer in another plane swooped down and made this striking picture of the plane speeding over the roaring express. The big transport plane is the first ship of the new Eastern Air Transport Line's fleet to go into service. This line now carries passengers between New York and Miami, Florida.

Opportunities for aerial travelers to look down on the older method of transportation at such close quarters are rare. Ordinarily they fly at such a height that it would be impossible to get a picture of a train and a plane at the same instant. In this case they were not together long for the train, the crack "Orange Blossom Special," could not keep up with its newest rival, and the plane soon outdistanced it and disappeared into the sky.

MIKE ON STAGE HELPS THE HARD OF HEARING

AS OPERA glasses help those who have poor theater seats in seeing performances, so earphones help those who have difficulty in hearing words spoken from the stage. Engineers at Birmingham, England, following in the lead of several American theaters as described in this magazine, have installed headphones. Wiring permits a microphone on the stage to be connected with earphones anywhere in the audience.

TEST MIND AND BODY IN BREATH HOLDING STUNT

CANDIDATES for pilot's training with the British Royal Air Force are required to hold their breath for sixty-nine seconds as part of their physical fitness test. Then they have to tell the examiner why they could not hold it longer. This is supposed to be a good trial of their hearts, minds, and lungs. If a candidate holds his breath only a part of the required time, and then gives some silly reason for not holding it longer, it is assumed he will not make a good military airman. Holding it for the required length of time is taken to mean that he possesses the ability and the willingness to stick to a hard job and calmly face an emergency.

FEATHERED WINGS PUT ON BICYCLE FOR SPEED

STRANGEST of vehicles is a winged and feathered bicycle invented by an Austrian mechanic. A tiny gasoline motor mounted over the front wheel causes the wings of this odd machine to flap by means of a rope and pulley arrangement. The wings have a horizontal motion as well as a fore-and-aft one. They are covered by artificial feathers which are said to be weatherproof. Trials of the machine are expected to take place soon.

Flapping wings, covered with artificial feathers, were designed by an Austrian mechanic to speed up bicycle

MOVABLE NOTES MAKE MUSIC A GAME

MUSICAL notes that can be moved about like checkers and pupils to learn to read music. Miss Camille Ailensworth, a Washington, D. C. music teacher devised this means for her pupils. A large table is ruled to represent the lines of a staff. The notes are cut out of cardboard and laid upon the table so they can be moved.

In order to make the game more interesting the letters designating notes are incorporated in easily remembered nicknames. Some of these are "Tan the dawg" [illegible] Easy E [illegible] Fancy F [illegible] Alligator A [illegible] Grandmother G." It is said that [illegible] take most [illegible] they are [illegible]

Miss Camille Ailensworth, Washington, D. C., [illegible]

Polar Sub Can Drill Through Ice

SIR HUBERT WILKINS

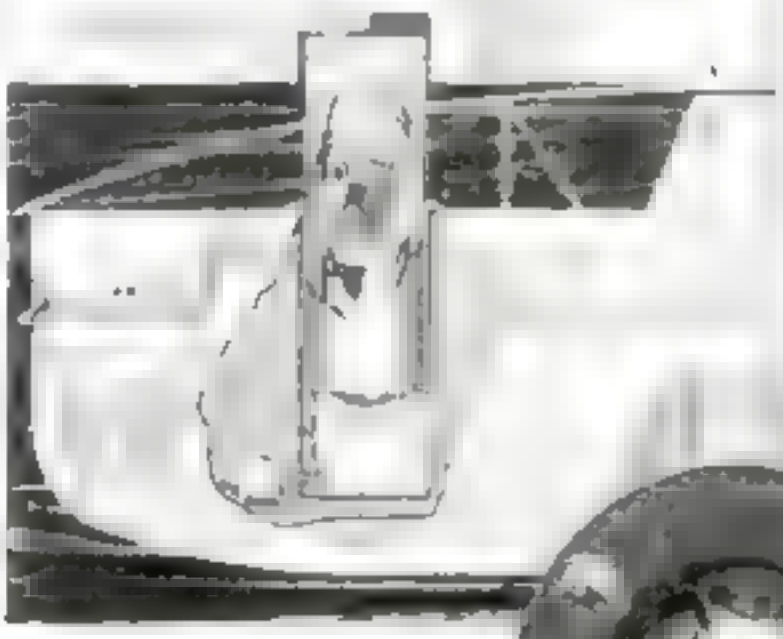

Mighty Landslides Remake the Earth

Sun, Wind, and Water Join Forces in Constant Effort to Level Off World's Face Regardless of Man

By CALVIN FRAZER

Monte Arb no, the celebrated "moving mountain" of Switzerland. For a long time it advanced only about six inches a year. Then it quickened its pace and a great landslide occurred in

NIAGARA FALLS recently dropped 75,000 tons of rock from its crest, creating a V-shaped gap over 150 feet wide and 150 feet deep, which completely alters the contour of the American portion of the falls

This gigantic landslide focuses public attention in a spectacular way on the previous history and future fate of the falls. Geologists say that this latest Niagara Falls landslide is but one tiny step in a process that began twenty-five or fifty thousand years ago when Niagara was but one of five waterfalls in the region where Syracuse, N. Y., now stands. It will end, they predict, with Niagara reduced to a turbulent series of cataracts dashing through masses of broken stone

The sudden and dramatic change in Niagara is, after all, just one episode in the natural process of leveling the mountains and filling up the valleys that has been going on since the world began. Nothing, not even the toughest granite cliff, is proof against this flattening process. If it were not for counteracting agencies, among them earthquakes, the world, in the end, would become a dreary sea of water with not so much as a foot of dry land anywhere

The leveling process often is costly in human lives. One night last November the retaining wall at the foot of a large hill in the French city of Lyons collapsed, after having been undermined by rain water, and a huge mass of earth and rock thundered down on scores of houses, burying many men, women, and children as they slept

A SECOND landslide, less than an hour after the first killed twenty-four firemen and policemen engaged in rescue work. A famous cathedral and a large hospital narrowly escaped being involved in this disaster

Not a year passes without news of several more or less destructive landslides in various parts of the world. Usually the damage resulting from these events is relatively small because the regions affected are sparsely inhabited, but in many cases mountain villages have been wiped out and a number of memorable landslides have, like the recent one at Lyons, occurred in big cities.

At Santos, the great coffee port of Brazil, the adjacent hill of Monte Serrat not only sends down disastrous avalanches of mud which bury people in their homes, but every few days literally paints the town red. The hill consists mostly of red clay which, when it rains, is carried over a large area of the city, coating the streets and sidewalks and clogging the sewers. Instead of sending out squads of men to shovel snow, as happens in our northern cities in winter, Santos sets a large force of laborers at work after heavy rainstorms shoveling away the clay

RECORDS of landslide tragedies abound in the history of the Alps, not because those mountains are especially unstable, but because a large population has long occupied their flanks. In the night of September 4, 1618, the falling of the Monte Conto, in the Vale of Chiavenna, north of Lake Como, buried two small towns. Of their 2,430 inhabitants only three survived. Three villages with their entire population were overwhelmed by the fall of a mountain in the Treviso district in 1772

An outstanding disaster of the nineteenth century was the landslip of the Rossberg, which, on September 2, 1806, buried four villages in the valley of Goldau. After preliminary cracking of the mountain side and the rolling down of single stones, which lasted through the day, a huge chasm opened in the flank of the mountain about five in the afternoon. Then from the neighboring summit of the Rossberg the forest was seen to wave to and fro like a storm-tossed sea, and the whole

Great masses of rock and earth thundered down upon a section of Lyons, France, last November crushing homes and killing many persons. Here the rescue squad is at work. A second slide caught them and killed 24.

so of the mountain slid down with constantly increasing velocity until finally hundreds of millions of cubic feet of rock swept down into the valley

The friction of the rocks hurled together in their descent produced so much heat that flames were seen to flash forth from the avalanche The moisture with which the rocks were saturated being suddenly changed to steam caused violent explosions More than 450 lives were lost in this disaster

Another historic Alpine landslide was the one that buried part of the village of Elm in the canton of Glarus on September 11, 1881 Above this village rose the precipitous peak of the Plattenberg Kopf, at the foot of which

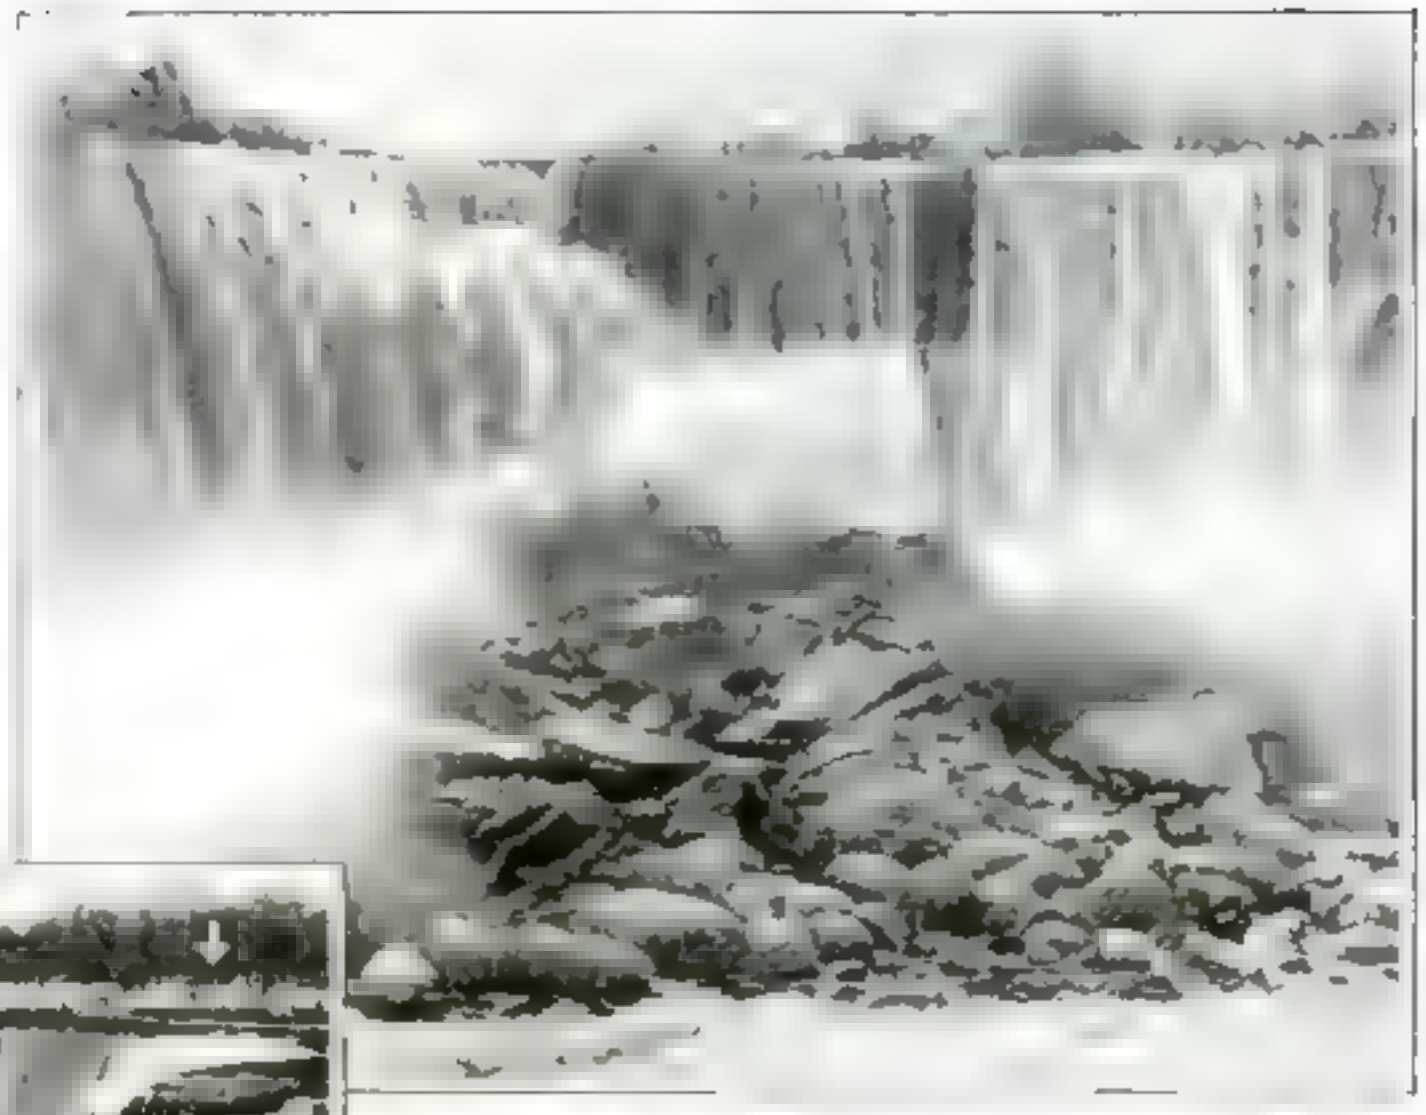

flowed a great river of mud Note the mud that struck the town last summer has nearly buried the houses.

...ster was due to the quarrying ... which gradually undermined the mountain mass above

Late in the afternoon great slices occurred on each side of the summit The gashes left by them united below the peak and left its enormous mass without support Four minutes later the whole 10,000,000 cubic yards of rock toppled over crashed down upon a small valley above the village dashed like a torrent of water up the opposite side of the valley and then poured down the mountain side About half the village was swept away

MANY of the victims of this landslide were killed or mangled as the result of being hurled through the air by the terrific wind that rushed out in front of the descending mass of rock. The winds produced by great landslides and by ava-

... the town ... the Elm disaster reported that trees were blown about like matches, that houses bent trembled, and then broke up like ... before the landslide reached them

On November 22, 1926, after heavy rains, a crevasse opened on the steep flank of the Maritime Alps above Roquebrune During the night of November 23-24 a great mass of rock broke away and fell on the village destroying a dozen houses and killing twenty-five people. The catastrophe was due to the saturation of the ground above a sloping bed of clay, down which the whole mass slipped

On April 29, 1903, part of the town of Frank, Alberta, was buried by a landslide with a loss of seventy-five lives. The slip occurred on the side of Turtle Mountain sending a mass of material nearly half a mile square and 400 to 500 feet deep into the valley below. The length of the slide was about two and a half miles, and the time it took was not more than 100 seconds. Heavy ...

Finds Way *to* Tune Rays *of* Ultra Violet

By

ALDEN P. ARMAGNAC

GEORGE SPERTI, who looks more like a college student than the full professor that he is, exhibited the other day a few bottles of milk from his University of Cincinnati laboratory. Experts tasted the milk, examined it, and were amazed. Not only was it perfect in flavor, but ultra-violet lamps had packed it full of Vitamin D, the health-sunshine vitamin, without spoiling the taste, a difficulty that had balked all other experimenters who had attempted to treat milk with health rays. In other words Sperti had done the "impossible."

For some time it has been known that people who cannot live outdoors may obtain the benefits of sunlight by eating food that has been placed beneath sun lamps. A little more than two years ago Professor Harry Steenbock, of the University of Wisconsin, discovered how to treat food in this way. But by his process only certain foods, notably cereals, could be health-fied. The process spoiled the flavor of milk, which after "raying" tasted like burnt meat.

Now, by Sperti's new process, babies can have milk filled with the body-building vitamin and still fresh and sweet in flavor. His way of using "selected" or "tuned" ultra-violet rays successfully enriches other foods with vitamins. Bread, fruit, vegetables are some of the products through which you and I will benefit from Sperti's discovery.

The University of Cincinnati has also arranged with a nationally known food concern to manufacture food impregnated with vitamins by Sperti's new process. To appreciate the significance of this, just recall that only twice before has a great university gone into the manufacturing business. Each time it was for a reason of commanding importance—first, to produce insulin, treatment for diabetes, and

A sample for filter test is placed beneath one of Sperti's big lamps.

Sperti deliberately burned these scars on himself to prove that ultra-violet rays are not beneficial

both of which kill disease germs and makes possible the production of better vaccines for medical use.

His work shows authorities what kind of a "ration" is healthy and why. Florists may raise better flowers and poultry men better chickens, through the use of his "tuned" ultra violet rays.

Almost ready to come out of his laboratory in a commerce is a startling process that will preserve "perishable" foods for so many months that "out of season" may become an obsolete phrase.

Plant No. 1 received all of the ultra-violet rays while No. 2 received only selected rays. Note how No. 1 shriveled under treatment.

The chicken on the right has a bad case of rickets which the chicken on the left has escaped under proper treatment with selected rays.

Young Scientist Develops Control Method So Harmful Waves Can Be Filtered, Vitamins Put in Food or Plants. Deadly Microbes Killed. and Diseases Prevented

What does Sperti mean by "tuning al ra-violet rays? Much as they are talked about at present these invisibl ra not previously been fully under

ULTRA-VIOLET rays, potent and va ried in their effects, tan human sk manufacture the health-giving substance called Vitamin D in the body kill germs and spoil the taste of certain foods

Few before Sperti realized that *different kinds of ultra-violet light*, according to their wave length might cause these varied effects some good, some bad. Nor did a few random experiments with individual wave lengths of ultra-violet light settle it

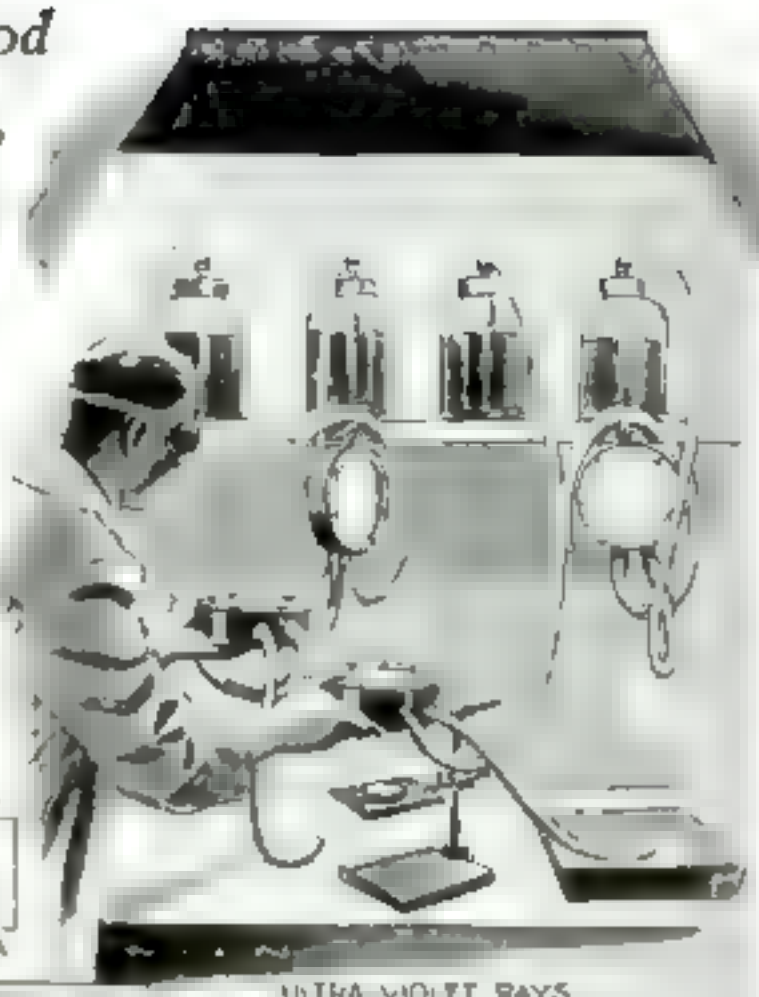

Professor George Sperti, who has performed new wonders with "tuned" ultra violet rays Here he is seen holding one of the filters used to select the ray desired for experiment

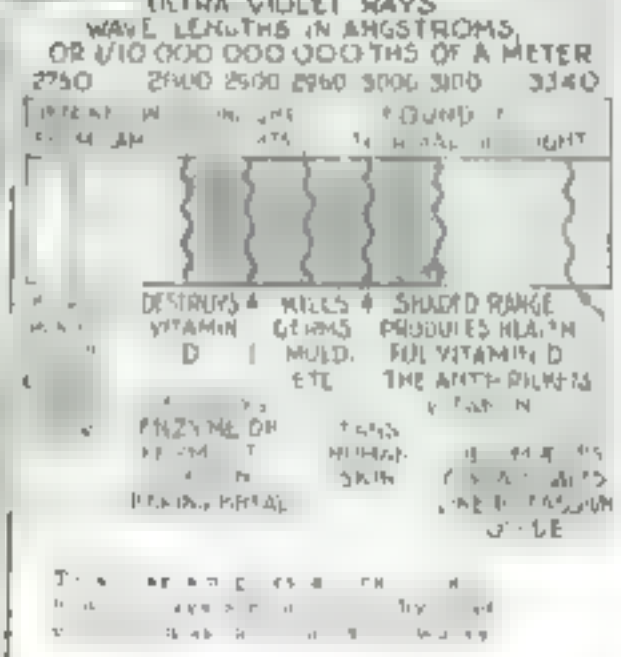

Sperti proved there are different kinds and showed how to separate the good from the bad.

Much as a radio listener tunes his receiver to a particular wave length to hear his favorite broadcasting station so Sperti now "tunes in" any wave length of ultra-violet light from the sun lamps in his laboratory

If he desires, he can turn on a ray that tans human skin or switch to one that sears it A slight adjustment, and he turns on the "death ray" that kills germs. When he wants to put Vitamin D in milk, he simply "tunes in" the ray that builds the vitamin and "tunes out" the ray that spoils the taste

This is how he does it: Picture him placing a flat vessel of green or blue liquid beneath an artificial sunshine lamp. This liquid "filter" permits only the desired wave length of ultra-violet light to pass through. A row of round and oblong filters rests his shelf, each marked in pen-and-ink numbers with its wave length. The kinds of liquids are chemical solutions that absorb all but certain rays of ultra-violet light, to which they are transparent. They flow into the filters through rubber tubes from large crocks, whose variety of color suggests the many-hued vessels that once were prominent in a druggist's window

WHEN I went to see Professor Sperti to find out how he had made his discoveries, it was the man himself who interested me even more than what he had done. If I had expected to find a bearded savant, I should have been disappointed. Though he directs a research laboratory where thirty young men and women work, it was a slight figure animated with boyish enthusiasm who firmly grasped my hand.

When George Sperti was a twenty-two year-old engineering student at the University of Cincinnati, he designed an electric meter of entirely new type to measure the amount of current consumed by factories. He submitted his plans to the Westinghouse Company. Officials of that concern urged him to leave the university and come with them to help manufacture the meter. Sperti declined. So they bought his invention anyway—for the second highest price some say, that Westinghouse ever paid for a patent.

THE president of the university, hearing of Sperti's invention, called in the young student for a talk. He urged Sperti to remain and work there after graduation. That was why Sperti declined the electrical firm's tempting offer. The president had listened sympathetically to an ambitious plan of Sperti's—to set aside a laboratory where he could apply his mathematical and engineering talent to new researches into the mysteries of ultra-violet light and other rays. Sperti believed he could calculate, on paper, just what wave length of ray would be required to produce any given effect from tanning skin to killing *(Continued on page 132)*

Robot Elevators to Serve 85,000 in Greatest Building

By KENNETH M. SWEZEY

WHEN in a few weeks the doors of New York City's Empire State Building are opened to admit the public, fifty-eight electrical robots will be standing at attention, awaiting merely the pushing of buttons to begin the distribution of a daily population almost equal to the combined population of the famous summer resorts Newport, R. I., and Atlantic City, N. J.

Governed by complex electrical brains, through miles of copper-wire nerves, this fleet of automatic elevators is expected to handle an unprecedented traffic with a smoothness, swiftness, and safety that could not be approached under ordinary human control.

No railroad has required more careful planning than this greatest of vertical transportation systems. The offices on the eighty-six floors were designed to accommodate some 25,000 workers. If statistics of other large office buildings could be relied upon, about 60,000 transients, in addition, could be expected every day.

Not only would it be necessary to transport this army of 85,000 persons to the desired parts of the building and down again, but all the floors would have to be served with nearly equal speed and comfort. If the value of office space is not to decrease with height the eightieth floor will have to be as easily accessible as the tenth or the twentieth.

Besides, there loomed the highly concentrated traffic of rush hours. Figures gave evidence that in the minutes between 5 and 5:30 P.M., for instance, about 15,000 persons would have to be brought to the ground floor.

ENGINEERS and architects worked together over the problem, leaving no detail out of consideration. It was finally decided that fifty-eight elevators with automatic starting, stopping, leveling, and door opening and closing devices could most efficiently handle the bulk of the work. Nine additional elevators, with various degrees of self-operation, were decided upon for use in the top seven stories, the tower, and for freight service. The entire elevator installation, including such related work as the preparation of hatchways, cost about $4,000,000.

The job of the construction gangs, electricians, and engineers in their many months' work on this contract has not been simple. As the steelwork of the building rose higher and higher, the elevator men had to maintain satisfactory elevator service, steel-workers, masons, plasterers, plumbers had to be supplied continuously with materials. Any delay of minutes would cost hundreds of dollars. Every few days the rates for these temporary elevators had to be raised. To reduce expense, several cars that had been salvaged from the old Waldorf-Astoria Hotel were drafted for temporary service.

FOR the permanent elevator installation, a number of innovations were necessary. Because elevator cars were to rise faster than any previously installed, larger hoisting motors had to be designed and built. Ordinarily plumb lines are sufficiently accurate to align the rails that guide the cars and counterweights.

However fearing that air currents might deflect the lines in some of the tremendous shafts of the Empire State Building, the rails were aligned by sighting through mine transits—surveyors instruments adapted by mining engineers for determining the straightness of mine shafts.

A larger construction crew was required than on probably any earlier installation. Through one period over 300 elevator men were

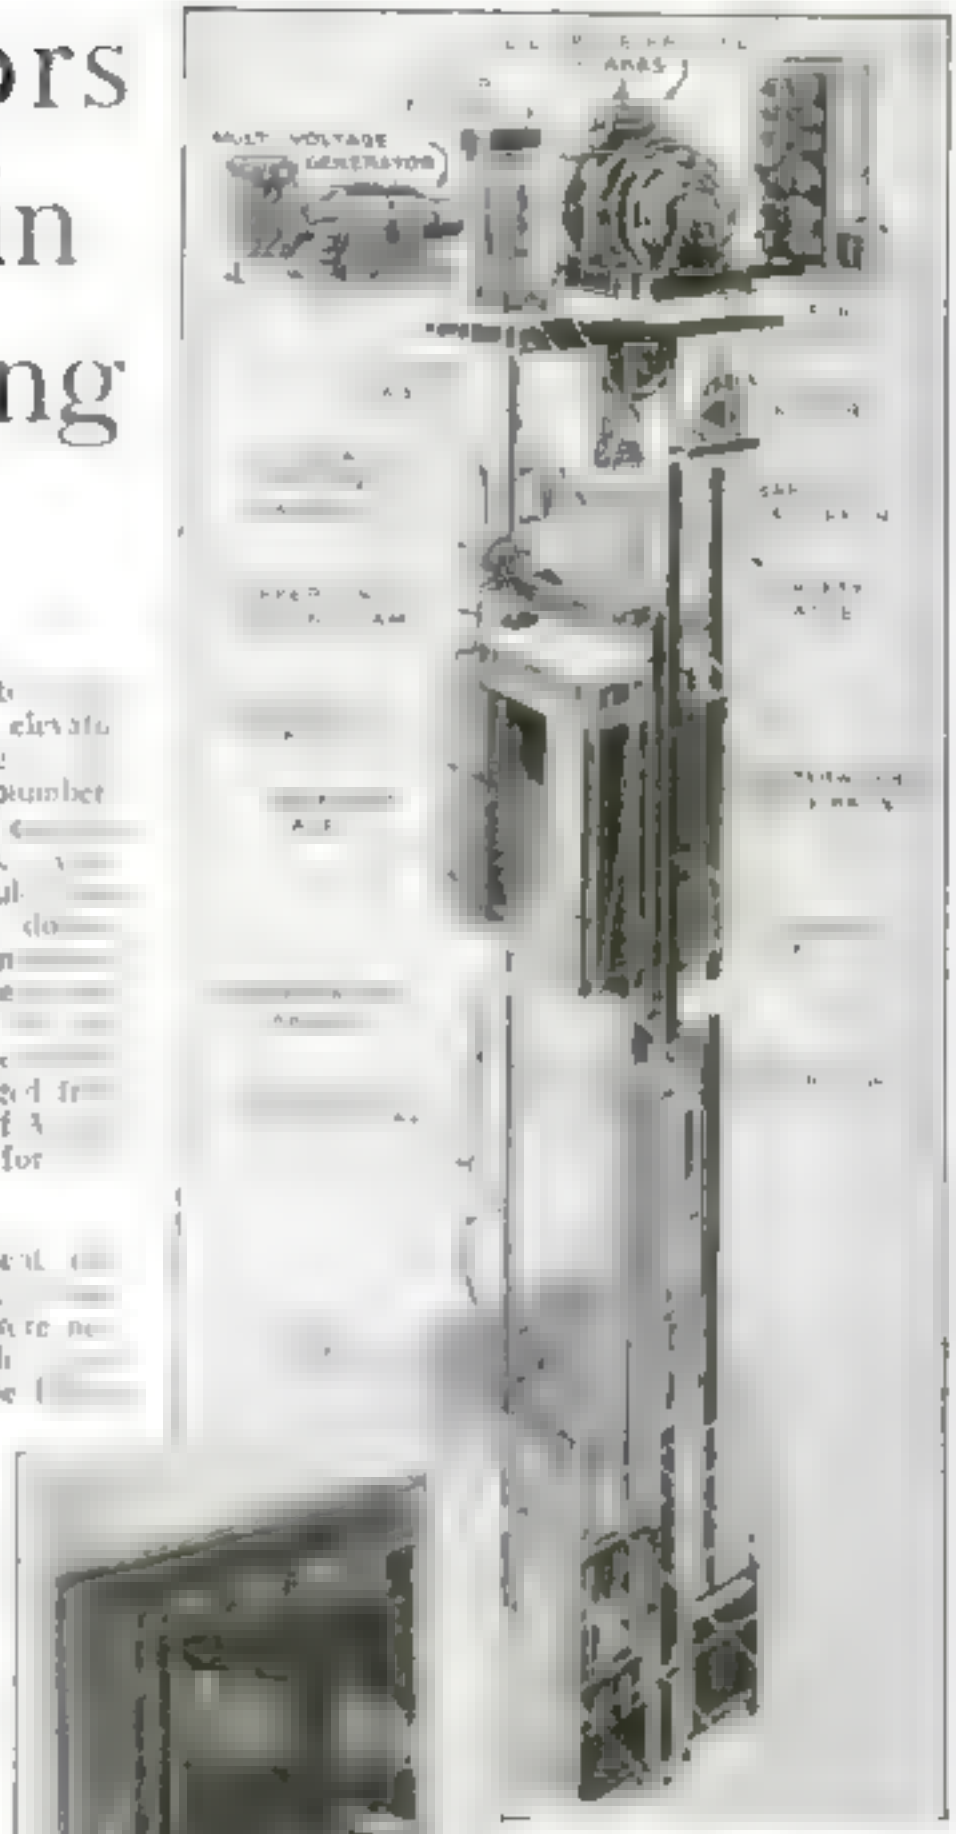

Standard Oil Building, about six years ago. Since that time many improvements have been made. The installation in use in the Chrysler Building, and the still greater one soon to be in operation in the Empire State Building, represent the most advanced systems of vertical transportation in the world.

We can best get an idea of automatic elevator magic by taking an imaginary ride. For an example let us enter the Empire State Building with the purpose of ascending to the seventy-ninth floor, seven stories below the top. We do not have to search long among the elevator corridors for the correct bank, which is indicated by an electric sign that announces 66TH TO 80TH FLOORS.

A light above one of the cars indicates that this car is the next one to leave. We step in. In a jiffy a jewel flashes on the attendant's control panel. He gives a slight throw to a lever. The doors of the shaftway and of the car silently and swiftly close, and the car automatically begins its smooth and fast leap skyward.

"SIXTY-EIGHT," "seventy," "seventy-nine," the passengers announce their floors to the attendant, who merely presses a button on the control panel for each number called. He need worry no more. Once the doors are closed the car is under the care of invisible supervisors—cams, cables, governors, generators, motors, brakes, switches, rheostats, relays that are quicker, more sensitive, and more positive in action, than he.

The car continues to speed upward for about a minute (this time will later be cut almost in half), then suddenly numbers begin to flash on a panel above the door. 66, 67. Almost imperceptibly, the speed of the car is retarded.

As 68 flashes, it stops, the doors automatically glide open, and we discover that the car has leveled itself perfectly with the landing. There has been no under- or overshooting of the mark, no breath-taking acceleration or retardation, no wrestling with the doors. A gang of electro-mechanical geniuses, hidden about the car, in the shaftway, and in the motor room, have done away with all that.

After two of the passengers have stepped out, the attendant again gives a slight throw to the lever, which initiates the closing of the doors, and the car proceeds. For every button that has been pressed, the elevator automatically makes the same sort of gentle, swift, and accurate stop. Not only does it stop in response to buttons on the operator's panel, but to buttons pressed by passengers waiting at hall landings. In which case the stop is made entirely without the attendant's knowledge.

TO economize to the utmost in waiting time, only the car that will actually stop to take on a passenger will flash a light in the hall. Ordinarily, the first car traveling past the landing in the direction desired must automatically stop; but when a car is full the attendant, by throwing a switch on his control board, may relay all calls to the next available car.

When we have finally been let out at the seventy-ninth floor, we find ourselves turning over in our minds some possible explanations for what we have experienced. Without human intervention we have been whisked some 940 feet from the ground—about seven stories higher than the McAlpin, Biltmore, and Pennsylvania Hotels piled on top of each other—lights have flashed, the car has stopped at desired floors, and doors have opened. How stiff seem the tin-clad dummies of the scientific lecture, that wink their eyes, salute, and say "hello" compared to the practical everyday elevator Robot.

THE controlling and operating equipment is by no means simple. To interconnect all the electrical circuits required by the elevators in this one building, nearly 5,000,000 feet of rubber-covered wire were necessary—more than enough to reach from Boston to Kansas City. In addition there are thirty-six miles of conduit. The length of the hoisting ropes, compensating ropes, and governor ropes exceeds 120 miles.

Accelerating, slowing down, leveling and stopping of a car is accomplished chiefly through the assistance of what is known as a "selector." This device, located in the motor room directly above each shaftway, has a sliding member that is run up and down past groups of contacts—in a small way following exactly the position of the elevator in the shaft—by a steel tape attached to the car.

If, by the pressing of a stopping button, the contacts of a certain group are made active, when the sliding member of the selector touches that group the circuits will be automatically manipulated to properly *(Continued on page 151)*

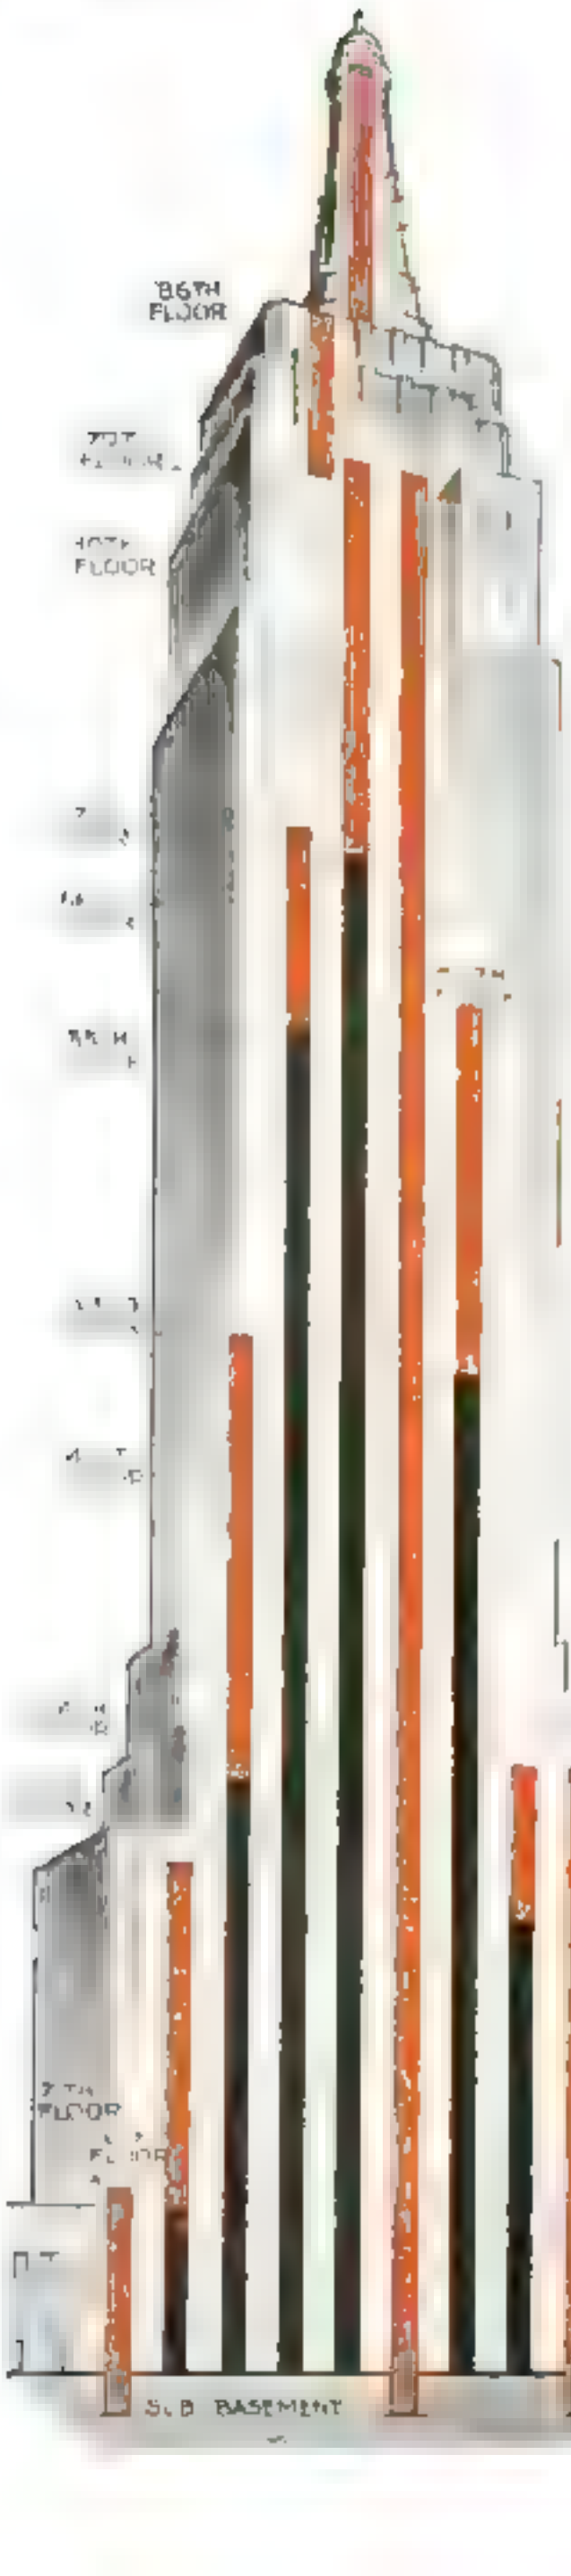

Red lines in drawing at left indicate banks of local elevators and black are the express banks.

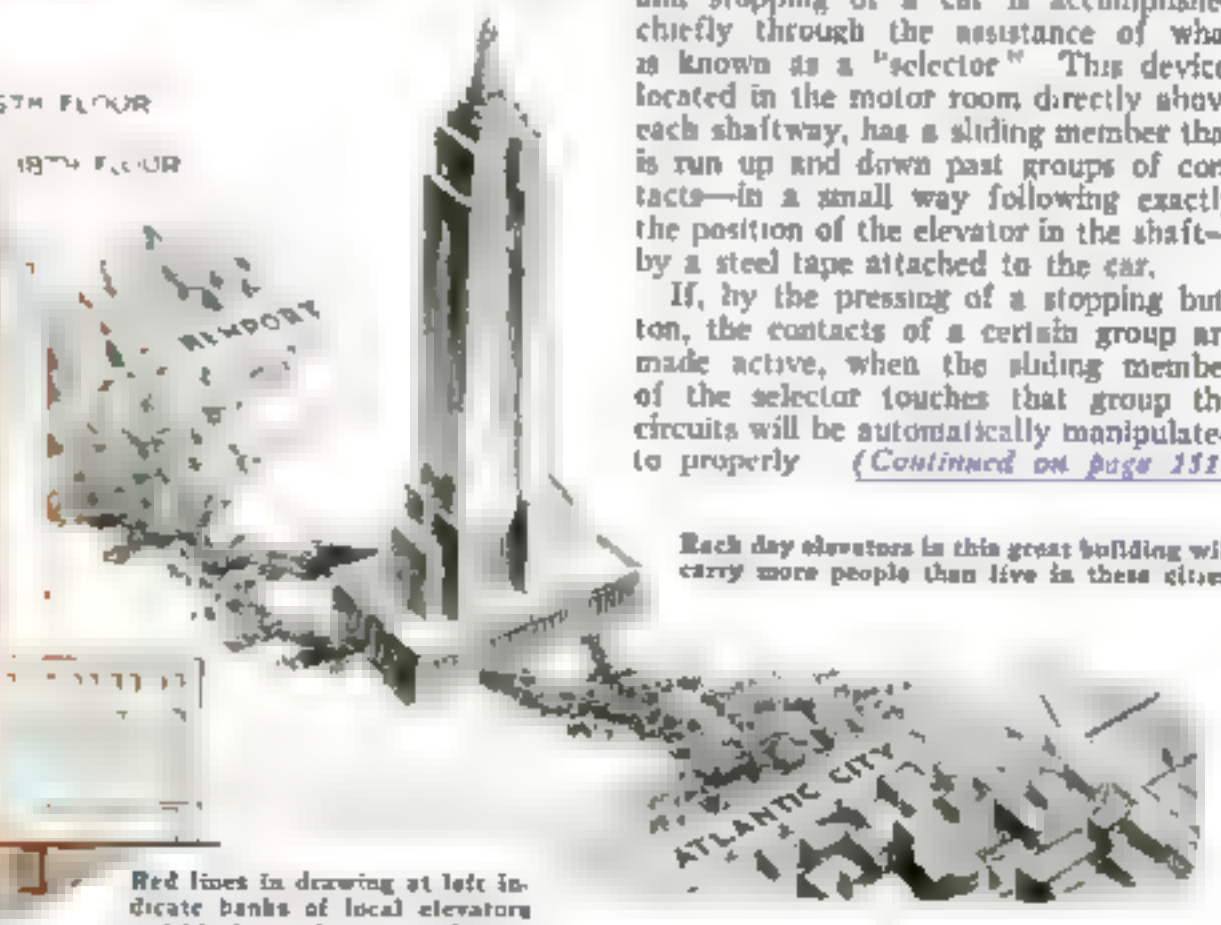

Each day elevators in this great building will carry more people than live in these cities.

WHEEL RECORDS STREET CAR MILEAGE

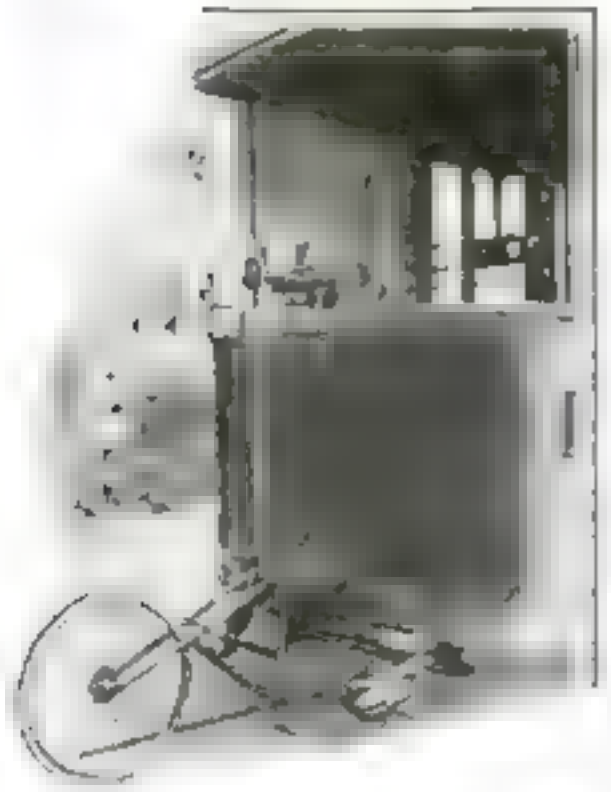

Attaching a trailing-wheel to the rear of street car, Berlin engineers learn how far it travels

How far do trolley cars travel in making a day's run? This is one question that Berlin, Germany, street railway engineers are seeking to answer by use of a trailing-wheel measuring device attached to their cars. The trailing wheel resembles part of a bicycle frame, with wheel attached.

A driving gear working from a rubber-tired wheel operates a distance-recorder mounted on the rear platform of a trolley. A clockwork attachment also gives data on the trolley's speed and the time it requires to cover a designated route.

NONSKID OVERSHOES LIKE AUTO CHAINS

A YOUNG woman of Birmingham, England, borrowed an idea from motor cars to make walking safe on icy pavements. She has made herself a set of overshoes from wire netting. They work on the same principle as skid chains which motorists fit over their tires when the going is slippery.

The wire which is used resembles chicken fence wire, but it has a smaller mesh. Overshoes made from this material are pliable and may easily be carried in a traveling bag or a pocket when they are not in use.

The new "foot chains" can be worn either over rubbers or ordinary walking shoes. They are light in weight and cause no discomfort to the wearer. Their young inventor says that when wearing them she can walk with perfect ease and security over the most slippery sidewalks and even on the frozen surface of a pond.

Overshoes covered with wire netting can be worn on slippery streets without a fall



BIG DIPPER TURNING INTO FRYING PAN

THE constellation of stars known as the "Big Dipper" is such a familiar feature of the sky that it is difficult to imagine any change in it. And yet the arrangement of the dipper's seven stars is different today from its pattern of 4,000 years ago and from its shape 4,000 years from now.

Astronomers are enabled to plot the pattern of the dipper, both past and future, because of the revelations the spectroscope has made regarding the "proper motions" of these stars.

It has been discovered that five of the seven are traveling at similar speeds in one direction, and the two others are on an opposite course. The direction of each is shown by an arrow. Since the amount of these "proper motions" can be calculated, it is possible to show what their effects have been and will be upon the dipper.

The following experiment shows changes that have occurred and those that will take place in this star group.

Take two slips of semi-transparent paper. Fold them in half lengthwise, crease them, and unfold them. Now lay one paper over the figure of the dipper shown above, with the creased line along the three "handle stars" that are in a straight row. Trace through with a pen the five dots representing the stars whose arrows point left. Repeat the process with the other slip of paper, but trace through the stars whose arrows point right.

If the two slips are now held in contact toward a lamp, with their creases coinciding, and moved slowly upon each other, all the varying appearances of the big dipper, past and future, can be illustrated, as indicated in the small diagrams.

MAIL BOX DESIGNED TO LOOK LIKE LETTER

INGENIOUSLY graphic is the name plate on a letter box that Fred Miller, of Portland, Ore., designed for himself. It bears a cleverly executed imitation of a letter addressed to himself.

First Miller painted the front of the galvanized iron box white, and stuck in its corner a pair of real, canceled postage stamps. Then with a paint brush he drew in his name, address, and the rest of the cancellation marks. Two coats of varnish were applied to protect the stamps from the weather, and the unique nameplate was complete. In the picture above Mrs. Miller is looking for mail in the box.

NEW MOTOR BIKE HAS FRONT-WHEEL DRIVE

A NEW detachable motor for bicycles gives them a "front-wheel drive." The one-cylinder engine is bolted to the handlebars and front fork of the bicycle, turning the front wheel through the contact of a drive wheel with the tire.

The motor's unusual position has two advantages. The front-wheel drive gives better traction to pull the bike through mud or sand. Also the motor is under the rider's constant observation. Further, the inventor says that the weight of engine, resting on the front wheel and supplying power to it, lessens the chance for a skid on slippery pavement, the one accident to which motor bikes are most liable.

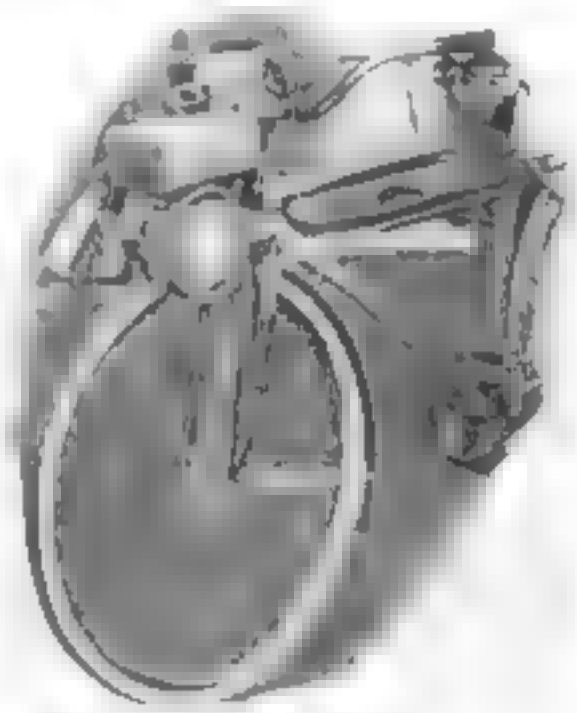

Motor fastened to the fork of a bicycle gives front-wheel drive and lessens skids

HONDURAS MOTH NINE INCHES ACROSS WINGS

A RARE moth of great size, captured by a scientific expedition in Honduras, Central America, was presented to the Philadelphia Academy of Science not long ago. It measures nine inches between the tips of its wings.

Even without its wings, the bulky body of this moth would entitle it to a place among the largest of insects. The expedition spent six weeks in the jungles of Honduras to bring back this and other specimens.

Moths of even greater size have been captured before, records show. Some of these had a wing spread as great as eleven inches. Yet all these are members of the same insect family that includes moths so small they can hardly be seen with the naked eye.

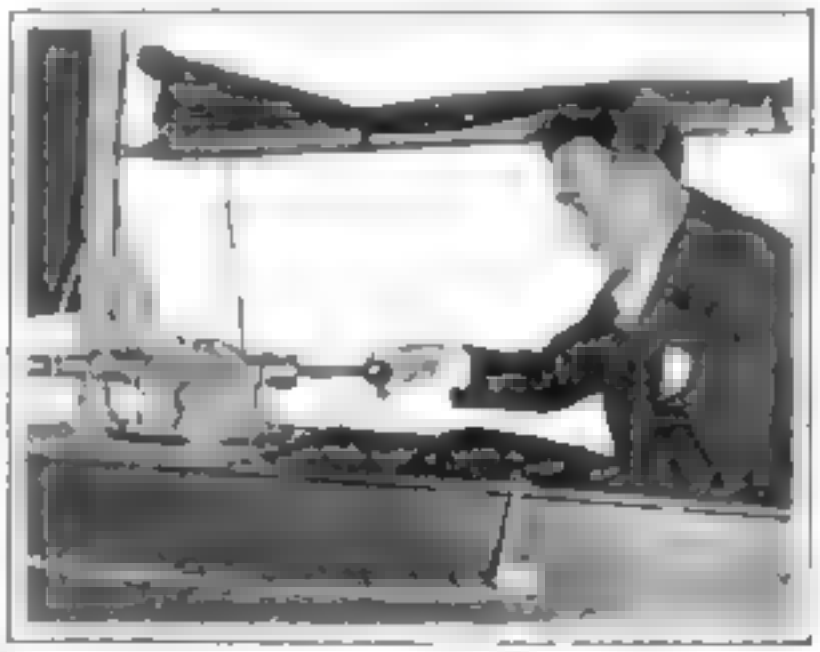

GLASS BACKSTOPS AID VIEW OF BASKETBALL

SO THAT spectators behind the goals can see the most exciting moments of basketball games, backboards of glass instead of wood were installed recently at the Madison Square Garden, New York City sporting arena. Transparent panes made it possible to watch the movements of players and the ball right up to the moment when the sphere dropped through the basket. After the trial at an intercollegiate game, arena officials reported it a huge success. Hitherto unwanted seats were now in demand, since they were nearest to the goals.

The backstop supports slightly obscure the view, but with the board transparent, this difficulty was not found serious by recent record-breaking crowds.

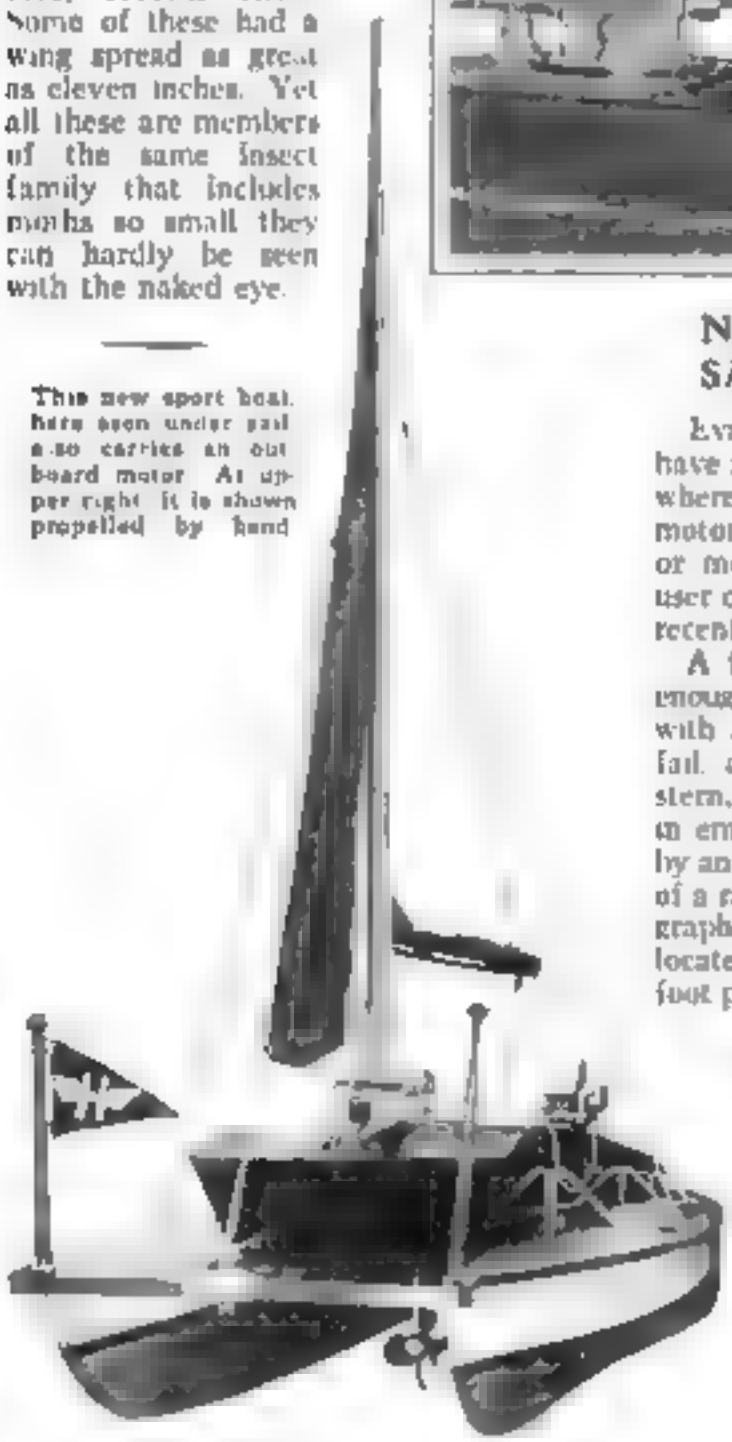

This new sport boat, here seen under sail, also carries an outboard motor. At upper right it is shown propelled by hand

NEW BOAT DRIVEN BY SAIL, MOTOR, OR HAND

EVEN the most inexperienced person can have no difficulty in making a new boat go where he wants—for it runs either by sails, motor, or hand power. Vagaries of breezes or motors need have no terrors for the user of this strangest of water craft, which recently made its debut in New York City.

A twenty-foot removable mast carries enough sail to give the boat good speed with a favoring wind. Should the breeze fail, an outboard motor, mounted at the stern, is ready for use. For exercise or in emergency, the boat may be propelled by an ingenious hand lever resembling that of a railroad hand car, shown in the photograph above. It spins a second propeller located amidships, which is directed by foot pedals to steer or reverse the boat.

As novel as its propelling mechanism is the boat's design. Its hull is supported by two long pontoons, giving great stability and making a centerboard unnecessary for sailing. A bumper like that of an automobile, at the front, makes the boat more "foolproof" by preventing damage from collisions. The cockpit's furniture includes a sliding seat like an oarsman's in a racing shell for the operator of the hand lever.

X-RAY USED TO FIND RADIO TUBE DEFECTS

THE X-RAY has been put to work by the General Electric Company as an inspector of radio tubes. The illustration below shows an X-ray photo of the internal organism of a high-power short-wave industrial radio tube, made at its research laboratory. If any defects occur during the manufacture of these tubes, they are at once apparent to an examiner from a study of the X-ray pictures.

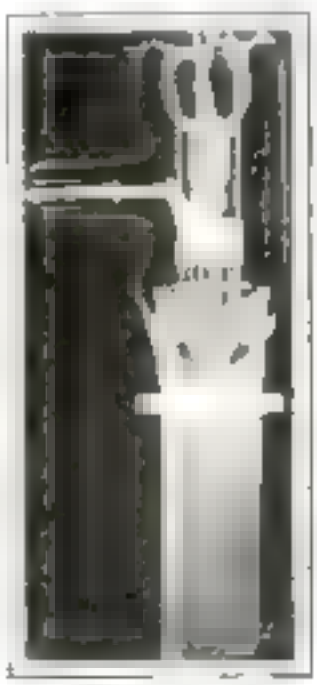

X-ray taken of radio tube to find any defect

After the tubes are assembled, and before the air is exhausted from them, a photograph is made in order to see that all the delicate structure within is right. Just before the tube is shipped from the plant, a further picture is made as a check.

NEW TYPE RADIO SENDS AUTOMATIC S O S

RESEMBLING a cabinet phonograph, this radio set was developed in Norway to send out automatic distress signals from sinking ships. A record takes the place of human fingers at its key, sending out code signals that have been heard 1,000 miles.

Records, furnished with each instrument, bear an S O S message signed with the ship's name and call letters. The records are so simple that extra ones giving the ship's position can be made on board ship in a few seconds.

CREWLESS TUGBOAT TOWS BIG BARGE

WITHOUT a man for crew the world's strangest tugboat was recently placed in service on the St. Lawrence River. Its Diesel-electric machinery is controlled through electric cables from a pilot house aboard the railroad barge that it tows. In his unusual position, the pilot can get a better view to steer the two boats. Duplicate controls in the tugboat allow it to be run alone.

Besides the large screw on the stern, the tugboat has [illegible] At either end of the barge is a [illegible] that can be operated from the pilot house of the tug. The barge has its own controls.

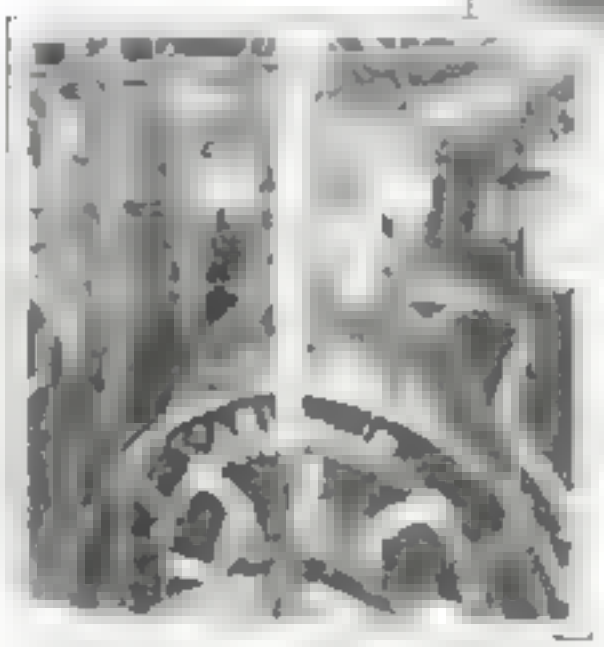

BUSES RIDE ON A TRAIN WHEN ROAD IS CLOSED

WHEN a five-mile portion of the Pacific Highway between Bellingham and Blanchard, Wash., was blocked for repairs, not long ago, the only detours available added [illegible] miles to the route. But an electric railway ran parallel to the main route. So John Hickok, superintendent of a Seattle-to-Vancouver passenger bus line, devised an ingenious way to maintain the line's fast schedule.

Under his direction, buses filled with passengers were loaded bodily upon railroad flat cars when they arrived at the blocked part of the highway. Interurban cars propelled the odd freight along the rails until the tracks again bordered the clear section of road, and the buses were able to proceed under their own power. Inclined platforms of boards enabled the buses to drive on or off the railroad cars.

BUILD SHED TO SAVE HUGE FOSSIL

[illegible] a house over a fossil skeleton in Indiana was the expedient resorted to by members of a Buffalo Museum of Science expedition when souvenir hunters and curiosity seekers [illegible] their work. Now they go peacefully on with their work of bringing to light one of the largest mastodons ever discovered in America, while visitors are allowed to peek [illegible]

[illegible] can be seen at the [illegible]

Harger, discovered the remains on a farm near Cromwell, Ind. While [illegible] Goldbeiser's farm [illegible] stock, [illegible] expedition to stumbled over [illegible] point unlike any he had ever seen. He took it to the farmer, who in turn communicated with the museum authorities. When the experts arrived on the scene they proved [illegible]

Working in the house erected over the fossil remains of America's biggest mastodon, experts uncovered the bones. One tusk of the prehistoric monster was twelve feet long.

Buses, refusing to be delayed by a blocked highway, were loaded on flat cars and carried forward.

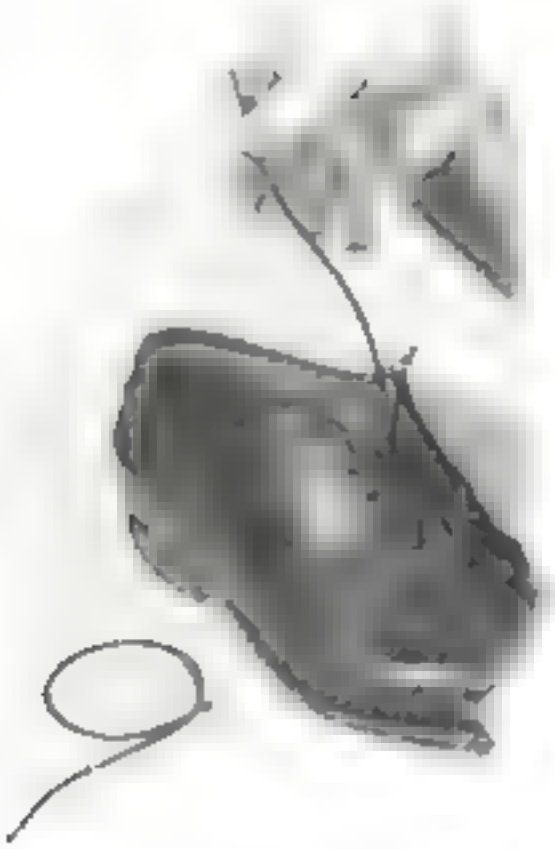

ELASTIC SHOE LACES WILL FASTEN WITHOUT KNOT

ELASTIC shoe laces, with a springy "give" designed to increase foot comfort, are a recent innovation. A single lace is used for each shoe. The black elastic cord is equipped with two slotted metal tabs, or anchors, of which one is attached before lacing the shoe

Starting from the inside of the shoe, the wearer draws the lace through the bottom eyelet, as shown in the photograph above, up to the anchor. Then he crisscrosses it between eyelets until the top is reached. Here he draws the lace taut and attaches the second anchor

With this novel device no knots are needed, and the new laces have sufficient elasticity to permit the shoes to be slipped on or off without unlacing them

ONE MAN CONTROLS BIGGEST HARD COAL BREAKER

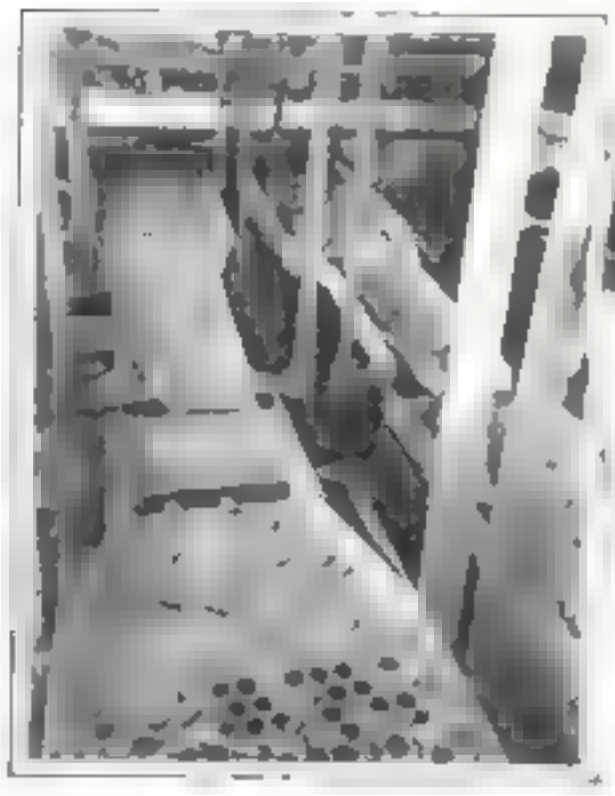

A [illegible] from he wor d's biggest hard coal breaker Lighted dials show at all times what is happening in every part of the plant. A felt the breaker soon at work crushing and sorting the coal into various sizes

At the right an ultra-modern anthracite coal "breaker" at Locust Summit, Pa., is the largest in the world, one man can set its massive machinery in motion. Its arteries of electric wires, carrying current to the powerful motors, are controlled from a single central switchboard. Hundreds of lighted dials give exact information as to what is happening in every corner of the plant from moment to moment

The duty of the coal breaker is to crush the large irregular lumps of coal that come from the mine, and sort the fragments into convenient sizes for household and industrial use. This is happening in the illustration above, which shows vibrating screens giving the last sorting to egg coal The electric master switch that starts the giant mechanism is seen being manipulated in the photograph at the upper right

PORTABLE CAR POLISHER SPEEDS GARAGE WORK

ELECTRIC power instead of "elbow grease" works a new car polisher made in Cincinnati, Ohio. A motor at its working end drives the buffer or polisher through angle gears. An electric cord, one end of which is plugged into a light socket, furnishes current to run this new tool which is controlled easily by means of a switch conveniently located in the handle

Aluminum is used for the motor casing and gear cover at the end, making it light and handy It is said to have proved a convenience around garages or wherever there is much polishing done, saving a great deal of time and labor in putting a shine on motor cars or bright metal fittings. Its particular virtue is said to lie in the fact that it is so light it can be carried easily from place to place and operated from any electric current socket. The motor of the polisher will operate on either alternating or direct current

MACHINE FINDS ANY ENGINE TROUBLE

This ten-sided panel contains five gages each of which connects with car's motor to find trouble

AN INSTRUMENT that diagnoses ills in auto motors is the product of a California manufacturing concern. A ten-sided panel containing five gages and a rotating pointer is mounted on a portable stand Wheeling it up to the car a garage mechanic connects it to the car's engine by wires and tubes Starting the motor, he notes the condition of its valves, valve timing carburetor and electrical system by readings taken from the dials The rotating pointer indicates revolutions per minute made by the engine under observation

This device is said to eliminate guesswork from the diagnosis of engine troubles. It also saves time for the customer, for his machine does not have to be kept under lengthy observation before the garage man can tell him what is wrong with its engine. This quick diagnosis is possible since each gage registers the condition of the particular part with which it is connected and also suggests the seriousness of the indicated trouble

This electrical auto polisher saves time and labor in shining the body and metal fittings.

Here Comes the World's Milkman

Unusual Photographs Tell the Story of Strange Methods of Milk Delivery from the Boy Vendor of Jugo-Slavia to the Giant Thermos Truck of Texas

At right is a typical milk carrier of Tunis, northern Africa. There, where the tropic sun beats down fiercely, the milk can carried on wooden yoke has no chance to be cooled

This truck and trailer carrying two big thermos bottles each with a 1,000 gallon capacity is now in use in El Paso, Texas. Milk, refrigerated before it is poured into the bottles, is held at a safe temperature

At left, the barefooted milkmaid of Portugal. Wearing her picturesque costume and balancing her big jug on her head, she brings in the milk

During Russia's winter refrigeration is no problem. The trouble is to keep the milk from freezing while in transit. Snow-covered streets necessitate the use of a sled, as shown above. The milkman, with one big can, pushes his sled before him as he goes from house to house on his route doling out the milk.

The bray of the donkey is heard in Seville Spain as the boy with his cargo of milk comes down the street. The sturdy little beast can carry a big load and the patron with his own mug helps himself

Berlin, Germany does it like this. The milk wagon has ten taps from which the customers draw milk and the cans

In India the milkman goes on foot a small keg of milk slung at his back. No effort is made to keep the milk cool and on hot mornings of that southern land, it probably often sours

Bulgarian milkmaids balance their pails here and all as seen above and in the better part one of Sofia they wear this quaint dress

At left the Macedonian milk boy is young but gallant and he stops in the streets of Dekalb Jugoslavia to give his lady friend a sip of breakfast

Residents of Lima Peru get their milk brought to them on horseback as seen below. Note the shape of the cans and their suspending strap that a small load is carried

You are now viewing an Englishman's tea parlor at Le Touquet France. The cow, one from a prize herd, is brought in and delivers the milk in person to the youthful consumers, one of whom is seen in the foreground

PUMP MUD TO RAISE ROAD'S SUNKEN SPOTS

When concrete roads in Iowa settle engineers of the State Highway Commission raise them by pumping mud cement under the sunken parts. Holes are cut in the surfaces from twenty four to thirty inches from the edges, from four to six feet apart. A similar row of holes is cut in the center of the roadway.

A gasoline-drive "mud pump," invented by John Poulter, Iowa highway engineer, forces the mixture through a hose into the holes. Mud alone would not hold the road up the engineers add cement or a chemical [illegible] reduce shrinkage. Thus sunken [illegible]

To date 209 sunken spots have been raised by the new method.

FIRE STATION DISGUISED AS PRIVATE DWELLING

Property owners in an exclusive residential district of Portland, Ore., objected when underwriters offered them a choice between raised insurance rates or the building of a fire station. They declared [illegible] ion would be unsightly, the fire chief solved the problem [illegible] ructure that any passer-by [illegible] for a private dwelling. Two [illegible] rs swing open to allow the

Casual visitors to an exclusive residential district in Portland, Ore., would never guess that this is a fire station. Note, at top, how doors are made to look like part of the wall.

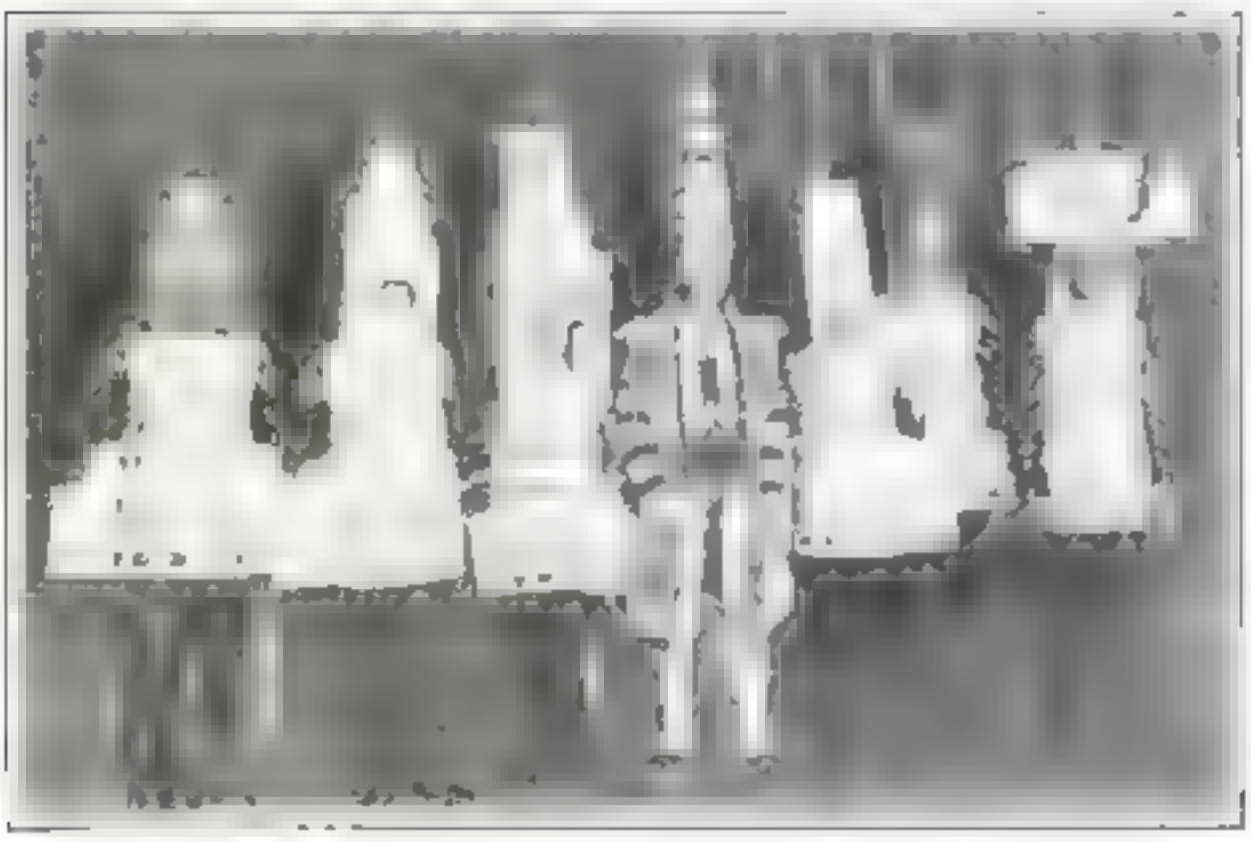

These are not real buildings; they are merely architects at play, each wearing a costume planned in imitation of a famous New York skyscraper that he had designed.

ARCHITECTS DANCE IN SKYSCRAPER COSTUMES

A group of famous architects formed a miniature "skyline of New York" when they met recently in costumes they had chosen for the annual Beaux Arts Ball in New York. Each of the novel costumes represented a building designed by the architect wearing it.

Lined up in the accompanying picture, starting at the left, are A. Stewart Walker, architect of the Fuller Building, Leonard Schultz, who designed the new Waldorf Astoria Building, and E. J. Kahn, architect of the Squibb Building.

Next, in the center of the group, with a regal air that befits his proud creation, stands William van Alen, architect of the Chrysler Building, still tallest of the world's completed structures. Then come Ralph Walker, representing the Wall Street Building, D. E. Ward, designer of the new Metropolitan Life Building, and at the extreme right J. H. Freedlander, who was the architect of the Museum of the City of New York.

FILM SHOWS ROCKET ON WAY TO MOON

[illegible]

A BRILLIANT flash, smoke, a whistling roar and [illegible] trip between the earth and [illegible]. That, in essence, is what the [illegible] of the next neighbor would look like.

A huge rocket resembling an aerial bomb is represented as being fired into space carrying passengers and crew. Dr. Fritz Lang, the German director, explained the [illegible] of the picture before the American Interplanetary Society in New York the other day. As the possibility of just such a trip, used in Germany's film to depict a [illegible]. He believes that a trip to the moon may be made before the end of the century.

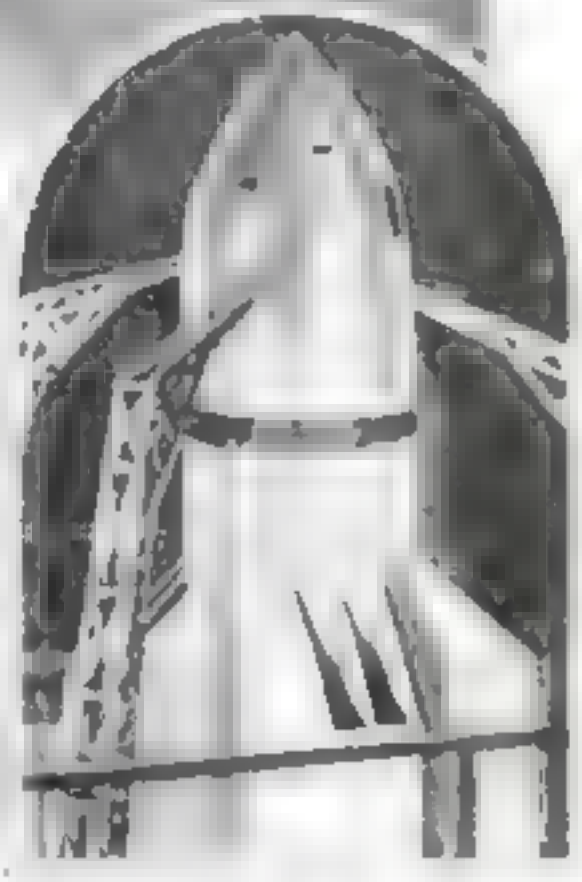

This is the mighty rocket that makes a flight to the moon in a recent scene of German motion picture exhibited in New York City.

EARTH RIPPLES JUST AS WATER DOES

RIPPLES pass over the earth's surface just as they do over a pond, scientists at the Harvard Seismographic Station have discovered. Similar quiverings or "microseisms" have been noticed before in observatories in volcanic areas, and never in Observatory up to this time. As most seismographs are not delicate enough to show these tiny earth waves distinctly, special apparatus was installed at the Harvard station for studying them. It is believed that much valuable scientific information might be obtained by observation of these waves from a continent-wide series of stations. Such an experiment, however, cannot be carried out at present because the cost of suitable instruments is too great.

STRANGE NEW ANIMAL FOUND IN AUSTRALIA

FROM the land of the kangaroo, wombat and duck-billed platypus comes news of one more oddity. Recently Albert S. LeBoeuf, naturalist of Sydney, Australia, confirmed reports that a huge striped animal like a cat, but which carried its young in a pouch like a kangaroo's, has been seen in Queensland. "I am positive," he declared, "that Australia will present another zoological curiosity to the world."

NEW CIRCUIT BREAKER RIDS HOME OF FUSE

PATTERNED after giant devices used in power houses, a new miniature circuit breaker recently has been developed by the Westinghouse Electric and Manufacturing Company, for home use. This novel "safety valve" for household circuits is a switch that automatically trips itself as soon as current on its line gets too high for safety. It takes the place of fuses now ordinarily used for this purpose.

After it has broken the circuit, it may be reclosed by hand, without the loss of time occasioned when fuses are burned out. No service man need be called to put the circuit in operation again, and spare parts such as fuses do not have to be bought.

The panel containing the new circuit breakers is placed in some part of the house that is easy of access, such as the kitchen, or a hallway near it.

When the current on your light circuit gets too high for safety the switch trips itself.

THIS RADIO PIANO HAS NO STRINGS

CLOSELY resembling a [illegible] in appearance, a "radio piano" recently developed, has no hammers or strings. When a [illegible] keyboard is struck [illegible] loudspeaker emits a [illegible] proper pitch. The sound is like that of a wind instrument rather than a piano. A wire attached to one of the player's fingers modifies the [illegible].

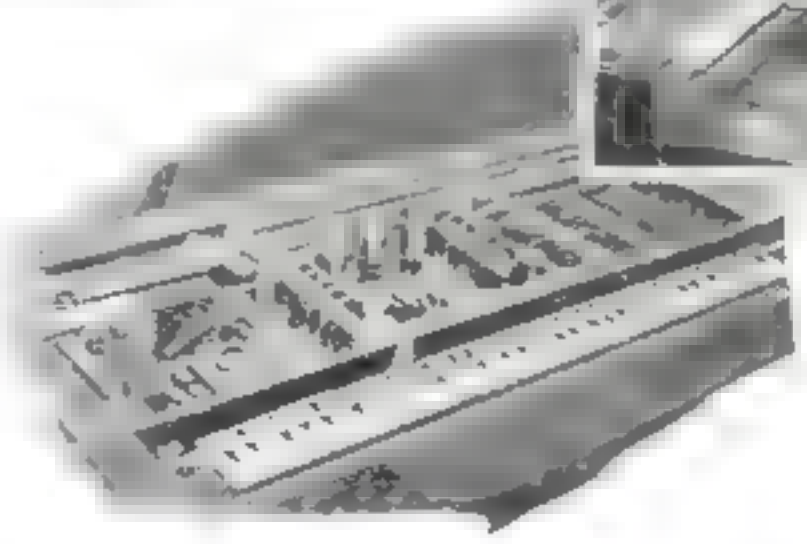

Maurice Martenot of Chicago, demonstrates the radio piano which he has invented. It has a regular keyboard but no strings or hammers. At left the radio tubes that take the place of the strings are seen. As a key is struck a tube is activated and the loudspeaker sounds the note which is similar to that of a wind instrument.

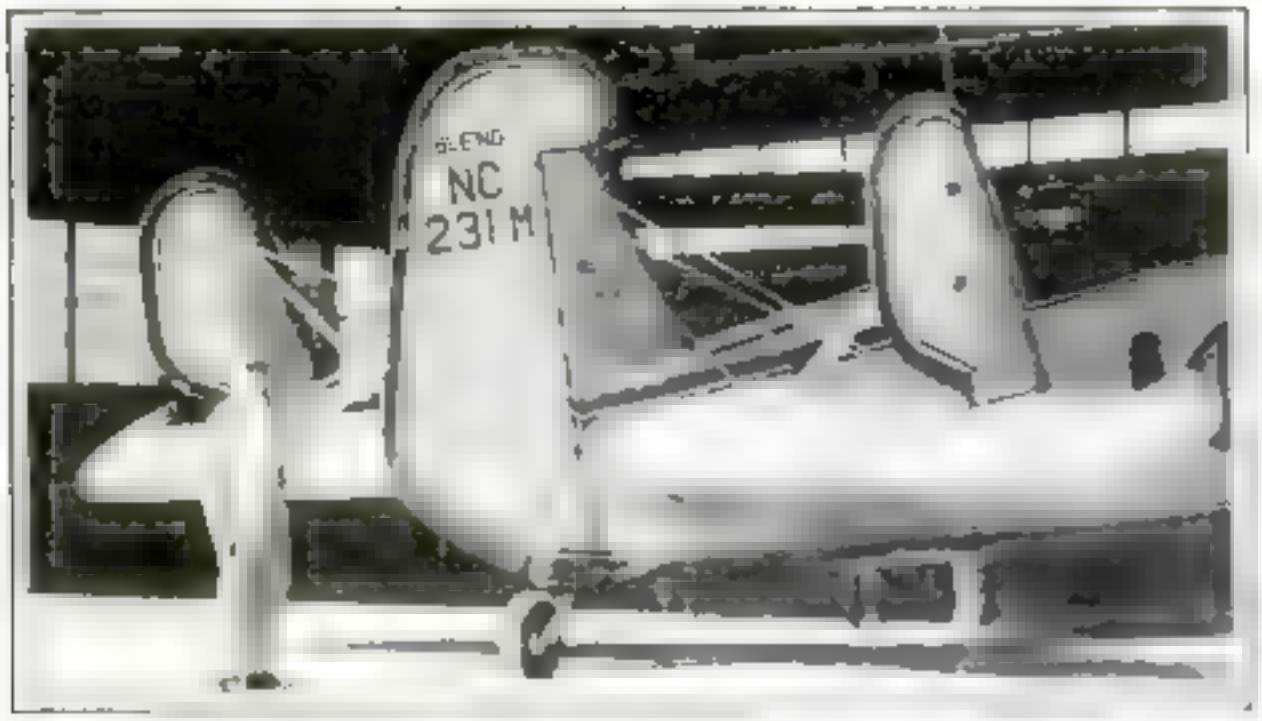

USE THREE RUDDERS ON THREE-MOTORED PLANE

TRI-RUDDERED as well as tri-motored are the eighteen-passenger transport planes on a transcontinental air mail route

When it was discovered that a single large rudder was inadequate, particularly for maneuvering about on the ground, Boeing engineers simply added an auxiliary rudder on either side of the large one. They can be seen in the photo above

The pilots now find the control surfaces ample. These are said to be the only craft in this country with triple rudders. Carrying out the triplet idea still further, each propeller has three blades.

VANES IN FRONT GIVE PLANE MORE SPEED

AN OHIO-SHAPED device is the invention of W Parker Perry of Somerset, N J., for increasing airplane speeds. A series of small vanes, looking something like paper pinwheels made by children, is mounted in front of the propeller hub. It is designed to create a partial vacuum before the machine, adding to its speed by decreasing the resistance

On its first test flight at Roosevelt Field, N. Y., it is said to have increased the speed of a standard plane by ten miles an hour. The inventor says he got the idea for his device from the shape of a post hole drill on his farm

W P. Perry, Somerset, N. J., demonstrates his pinwheel vanes on front of plane designed to increase speed.

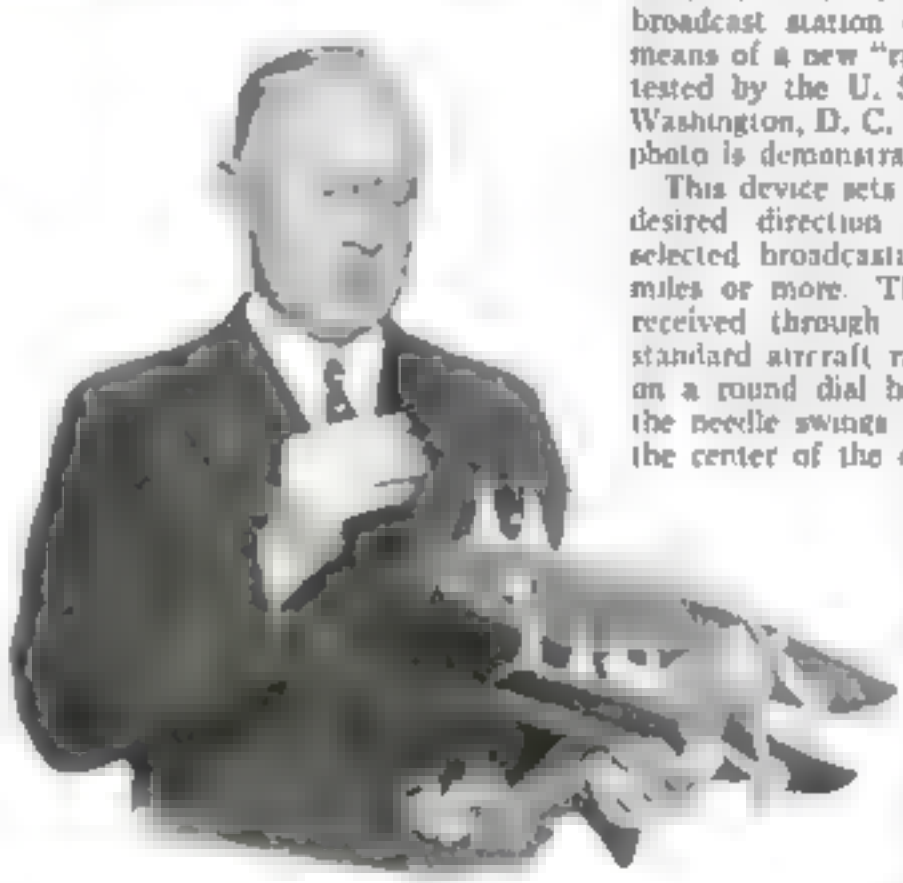

This model exhibited by Dr. G. W. Lewis, director of research for the Committee for Aeronautics, shows points of stress during flight

BROADCAST STATION CAN GUIDE FLYER

LOST flyers soon may find their way in fog by following the strains of a jazz orchestra back home. In parts of the country where official radio beacon stations for aircraft do not yet exist, any broadcast station can guide a plane by means of a new "radio compass" recently tested by the U. S. Army Air Corps at Washington, D. C. The pilot in the above photo is demonstrating it

This device sets a flyer's course in any desired direction with reference to a selected broadcasting station within 100 miles or more. The broadcast program received through a set much like any standard aircraft radio, actuates a needle on a round dial beside the pilot. When the needle swings to the right or left of the center of the dial, it shows the pilot he is off his course. The device is intended not to replace, but to supplement regular aircraft radio beacon service. It was developed by G. G. Kruesi, technician of a western air line in collaboration with Herbert Hoover Jr. son of the President and noted for his radio researches.

DARING FLIGHTS MEAN BETTER PLANES

Designs for [illegible] faster, and more maneuverable airplanes for the future were seen at the conclusion recently of experiments that were carried out during the last two years by the National Advisory Committee for Aeronautics

To illustrate the findings of these tests, which were conducted with fast fighting airplanes by three nationally known pilots at high speeds, the committee has built a scale model of a Boeing fighter showing the points on the wings and control surfaces at which highest pressures are reached in violent maneuvers such as outside loops and barrel rolls

The model, shown above by Dr. George W Lewis, director of aeronautical research for the committee, represents the pressures reached when a plane is pulled suddenly out of a power dive at 186 miles an hour Dr Lewis is indicating the point of highest pressure, which reaches about 450 pounds a square foot near the wing tip at the leading edge. It will also be seen that near the wing tips, the pressure drops rapidly toward the trailing edge but that as the center section is approached the pressure is more evenly distributed over the wing surface

This determination of air pressures, which gives aircraft designers a basis on which to calculate points of structural strength, was made possible by the disregard of personal safety of test pilots employed by the N. A. C. A to work out its flight problem in the air. One of these pilots, Major Luke Christopher, now secretary of the contest committee of the National Aeronautic Association, set a world record for acceleration in one of these routine tests.

The stresses imposed on various parts of the planes used in the tests were determined by the air pressure developed in small holes connected by aluminum tubes with a master recorder in the pilot's cockpit. The record was automatically registered on movie film at the moment of highest acceleration when the pilot pressed a button. The model shown was made from measurements taken from this film.

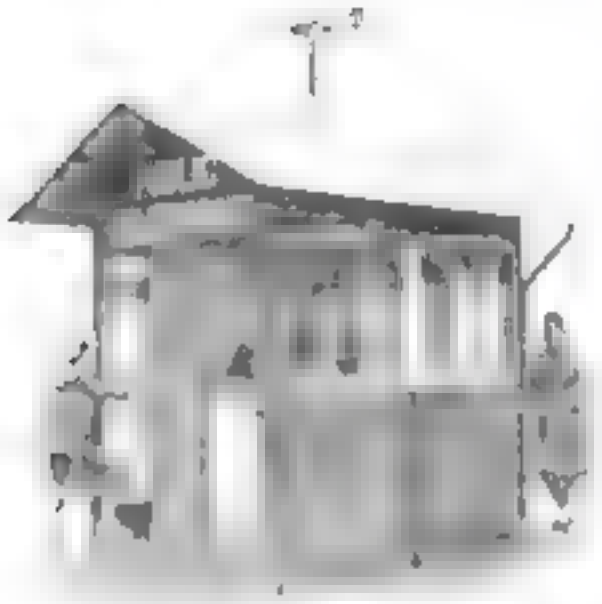

SOUNDPROOF BOOTHS FOR AIRPORT PHONES

A NOVELTY at an Oakland, Cal., airport is the set of soundproof booths that shut out the roar of motors of airplane engines from the ears of telephone users. Four booths are installed in one small building. The walls are insulated from each other as well as from airplane engine noises.

While telephones are not novelties at airports, this is believed to be the first time that their installation has been designed with an eye to the convenience of the air-traveling public, who would have great difficulty using a phone in an ordinary room at an airport.

PLANES GET HEATED OIL AND WATER FROM TRUCK

A NOVEL tank truck delivers heated oil and water to airports, thus shortening the process of warming up planes before their take-off. Water and oil are supplied at a temperature of 150° Fahrenheit from electrically-heated tanks, which are insulated to prevent undue loss of heat in winter. The truck has recently been put into commission by a large oil and gasoline distributing company.

The heating is controlled automatically, ensuring an even temperature of their contents. The truck also supplies gasoline to airports, delivering 500 gallons at one trip as well as 100 gallons of oil and thirty-five gallons of water. The saving in time and fuel by delivering preheated supplies is so great that, it is said, the operation of the truck more than pays for itself.

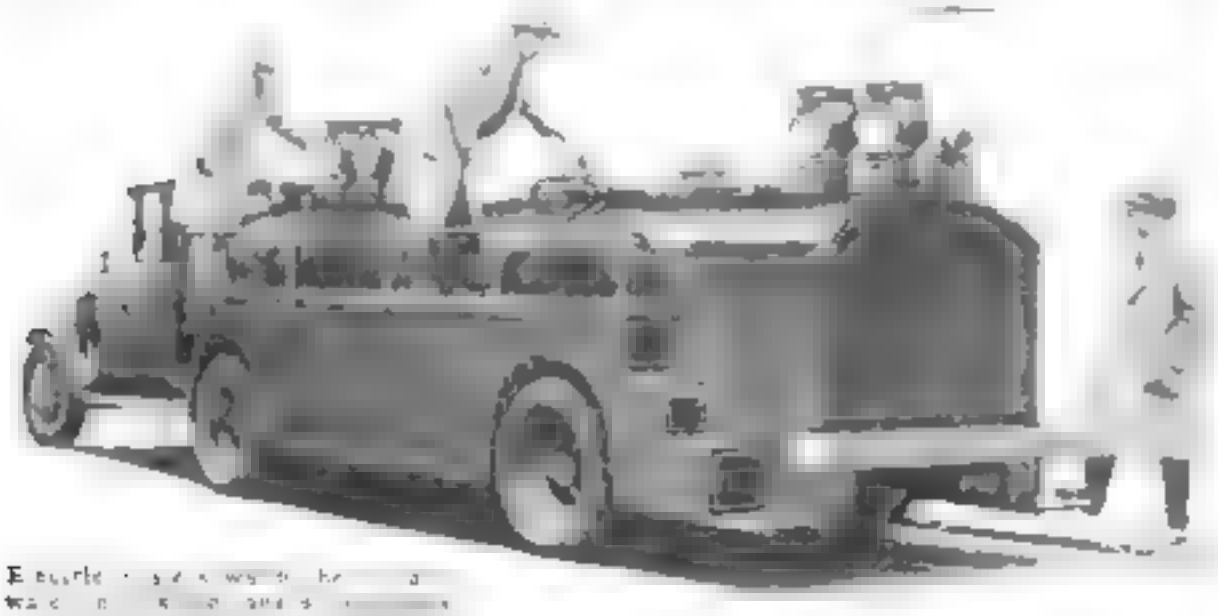

Electric [illegible] can save time used in warming up.

GOLD-BEARING PLANES BEAT SAVAGES

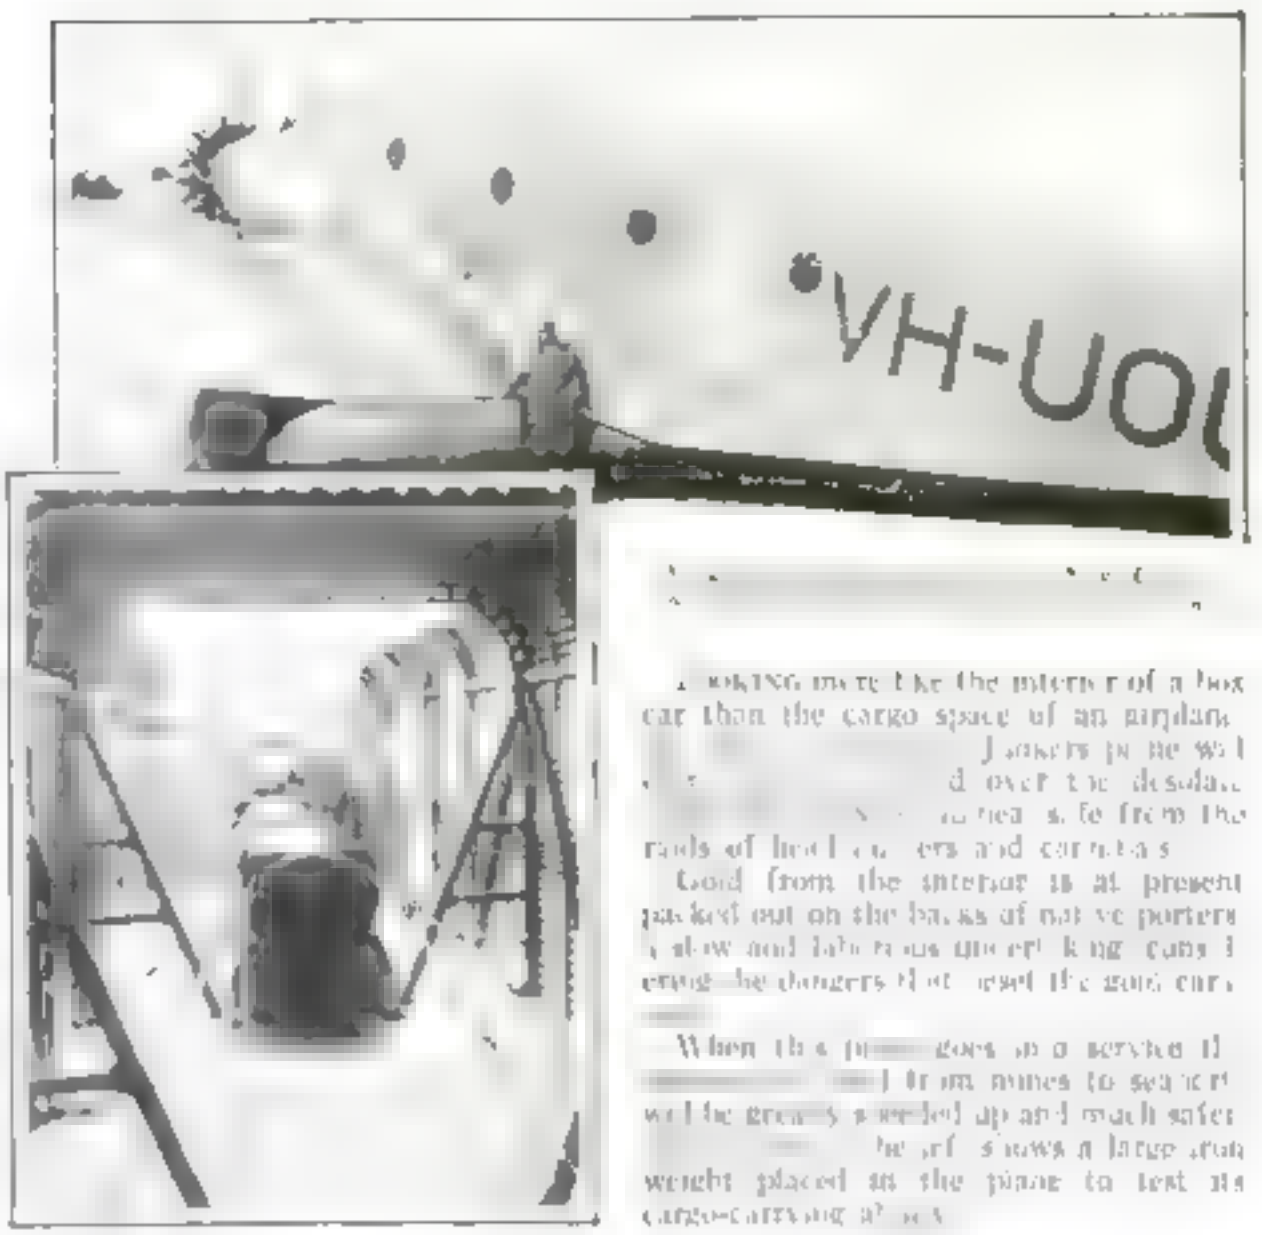

[illegible] looking more like the interior of a box car than the cargo space of an airplane. [illegible] passengers in the wide [illegible] over the desolate [illegible] safe from the raids of head-hunters and cannibals.

Gold from the interior is at present packed out on the backs of native porters, a slow and laborious undertaking. Cans [illegible] cause the dangers that beset the gold carriers.

When this passenger-[illegible] from mines to seaport will be greatly speeded up and much safer. [illegible] shows a large iron weight placed on the plane to test its cargo-carrying [illegible].

MACHINE DOES A LOT FOR A NICKEL

A MACHINE recently perfected by Francis C. Roberts, Washington, D. C., inventor, not only vends a stamped air mail envelope with a sheet of stationery for the price of the stamp, but provides entertainment for the purchaser and bystanders. When a five-cent piece is dropped in the slot as shown at the right, the vending device comes to life and a number of things occur.

An air mail envelope with a sheet of paper is dropped from the slot in front, a motion picture showing air mail activities is begun on the screen above, an illuminated reel of advertisements starts moving through the smaller slot below it, and colored lights flash alternately in the four small apertures near the bottom. As if that were not enough for a nickel, a long mirror on the left side changes to a series of lighted red, white, and blue strips and the small airplane on top glows with light while its propeller revolves rapidly. The device has the endorsement of the Post Office Department.

Inventor operates his new machine which vends air mail stamp and does other things.

PILOTS INVENT WIND GAGE FOR AIRPORTS

Two young air pilots of Riverside, Calif., recently demonstrated a model of a new device that aids airmen about to land. It shows wind direction and velocity, with much more visibility than the conventional wind cone.

Within a 100-foot white circle of concrete, glass-covered panels like spokes of a wheel radiate north, south, east, and west. With no wind, all appear black from the air. A north wind causes the "north" panel to turn over and show a white strip, and the device alters itself automatically to indicate any wind direction. Each panel is flanked by three rectangles, one or more of which turn white according to the wind velocity. A weather vane "control head" resembling the tail of an airplane controls it electrically, and at night it is illuminated.

LEVER JACK RAISES PLANE OFF WHEELS

An airplane jack developed recently by United States Army Air Corps engineers at Crissy Field, San Francisco, Calif., is a lever that "pries" planes up so work can be done on their tires. It consists of a wooden bar thirteen feet long with a heavy roller fitted a foot from one end. A chock or groove is located about halfway between the roller and the short end of the bar's lower face. The device is wheeled under a plane so its axle rests in the chock. Pressure on the long end raises the plane

CHANGING WINGS MAKES PLANE FLY

A few [illegible] Los [illegible] no[illegible] flaming youth that could be fitted either with "clipped" or [illegible] Ot[illegible] striking photograp[illegible] of the odd planes [illegible] sn[illegible] de[illegible] pl[illegible] tu[illegible] de[illegible] It can [illegible] be[illegible] ev[illegible] po[illegible] lo[illegible] th[illegible] ta[illegible] give a more advanced stu dent an opportunity to try out his ca[illegible]

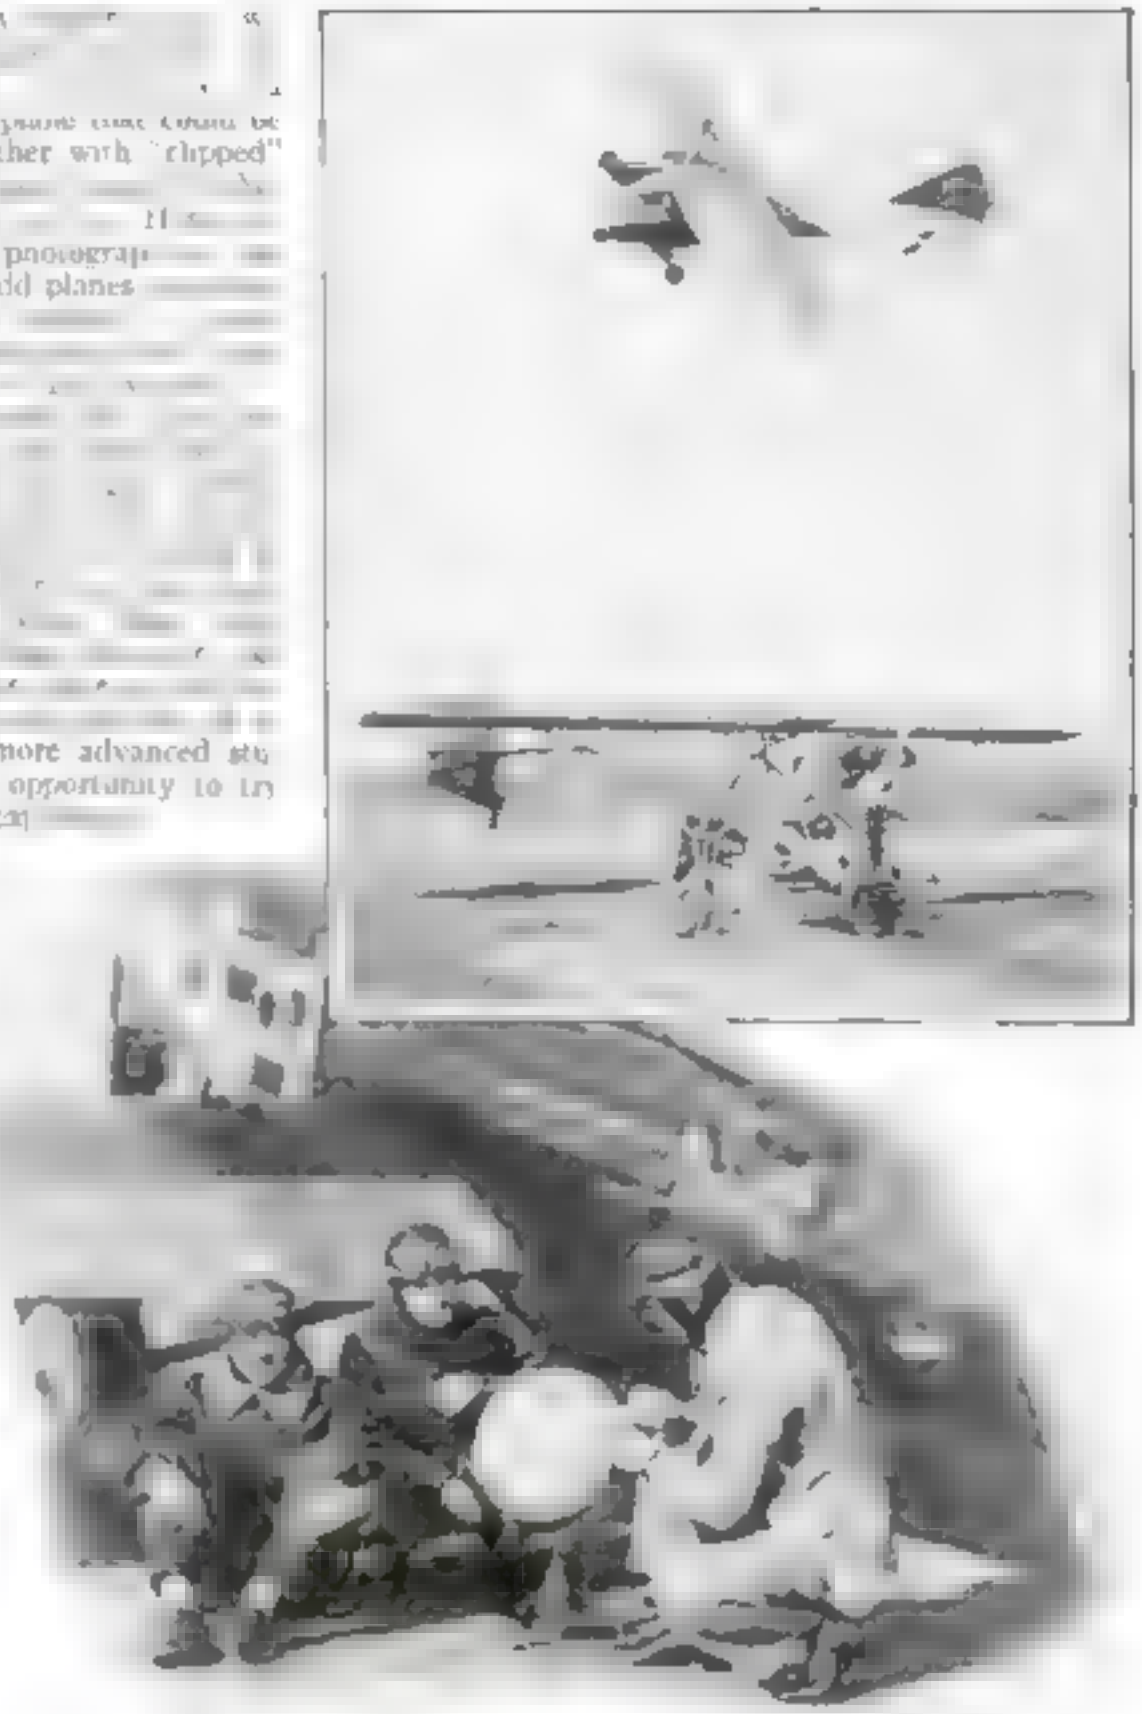

This airplane jack with a thirteen-foot wooden lever and a roller block will easily raise a big plane off its wheels so that work can be done on the tires.

THREE MAIL PILOTS FLY 2,400,000 MILES

A piece of string tied around a globe is a symbol to air mail flyers Jimmy Carson, Fred Kelly, and Jimmy James, seen in the picture above. It represents flight equal to the circumference of the earth while carrying Uncle Sam's mail. These aerial postmen, nicknamed the "three musketeers of the air," already have tied their one-hundredth string around the globe, signifying 2,400,000 miles of flight.

Their run is with the eastbound mail from Los Angeles to Salt Lake City. They started on it April 17, 1926, and are still flying it. In making this record they have flown nine ships, each of which is still equipped with its original motor. The total mileage of their flights more than equals four and a half complete round trips between the earth and the moon. During the time they have established this record they have had no serious accidents, although they have flown in all kinds of weather.

An abalone fishing crew. Note the diver on ladder washing

Find Riches in Mysterious Ocean Shells

By JOHN E. LODGE

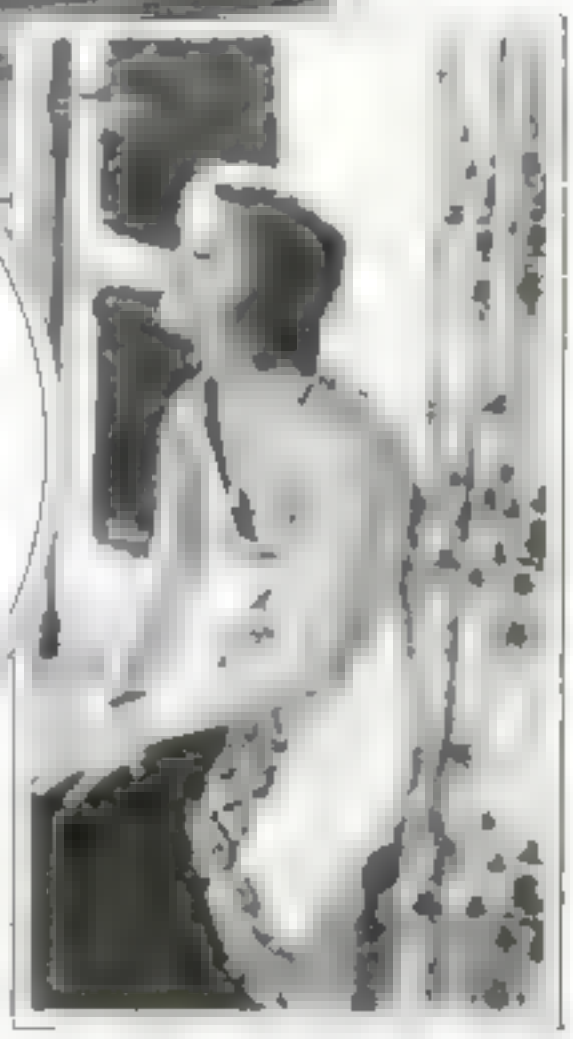

The pendant on this necklace, one of the largest ever found, is worth $1,000

WALKIN[illegible] f th[illegible] hundr[illegible] he surface, men armed wit[illegible] steel bars, long ki[illegible]ves, and small net baskets each year bring up from a limited area on the coast of California approximately 120 tons of rainbow-colored shells worth $4,000 to $[illegible],000 a ton. These shells contain a little[illegible] than 3,000,000 pounds of [illegible] food, and in addition every now and then a fine pink or gray pearl, valued at $50 to $1,000.

These men are abalone hunters and the shell they fi[illegible] is made into costume jewelry that has a ready market in the United States, continental Europe, the interior of Asia. Rings, necklaces, ear pendants, and bracelets are made from the gray, green, pink, lilac, and black shell, while the larger pearls go into the jewel collections of the world.

The fishermen, mostly Japanese employed and directed by Americans, are the highest paid workers in their craft in the world, receiving $25 a day for five hours' work during a season covering eight to nine months of the year. One of them is a woman, who has been doing this work for more than ten years, and has become one of the wealthiest Japanese on the Pacific coast in that line.

The abalone fisheries are at Monterey, Calif., and Ensenada, in the Mexican territory of Lower California, about eighty miles south of the United States border. The fishing is done ten to twelve miles out at sea.

THE abalone is a univalve (one-sided shell) that clings to rocks, gravel bottom, kelp roots, and ledges. Minimum size which may be taken legally is eight inches in diameter, but some have been brought up more than twice this size.

This queer fishing is done from twenty-foot boats—large, heavily-built skiffs towed to the scene of the fishing by sixty-foot motorboats. Arrived at the rocky reefs and under-surface beds where the abalone (Continued on page 142.)

At left, a Japanese abalone diver ready with basket to go down after the strange sea fish. Above, skilled workers removing the meat from the shells and searching for pearls.

How I Breed Lions

Behind the scenes on the only African lion farm in the world at El Monte, Calif. These youngsters, eight months old will grow for six more years.

Methods used on only farm in the world where Africa's King of Beasts is raised are described here. After ten years 178 lions live on ranch, and they have made a fortune for their trainer.

By CHARLES GAY

As Told to TOM WHITE

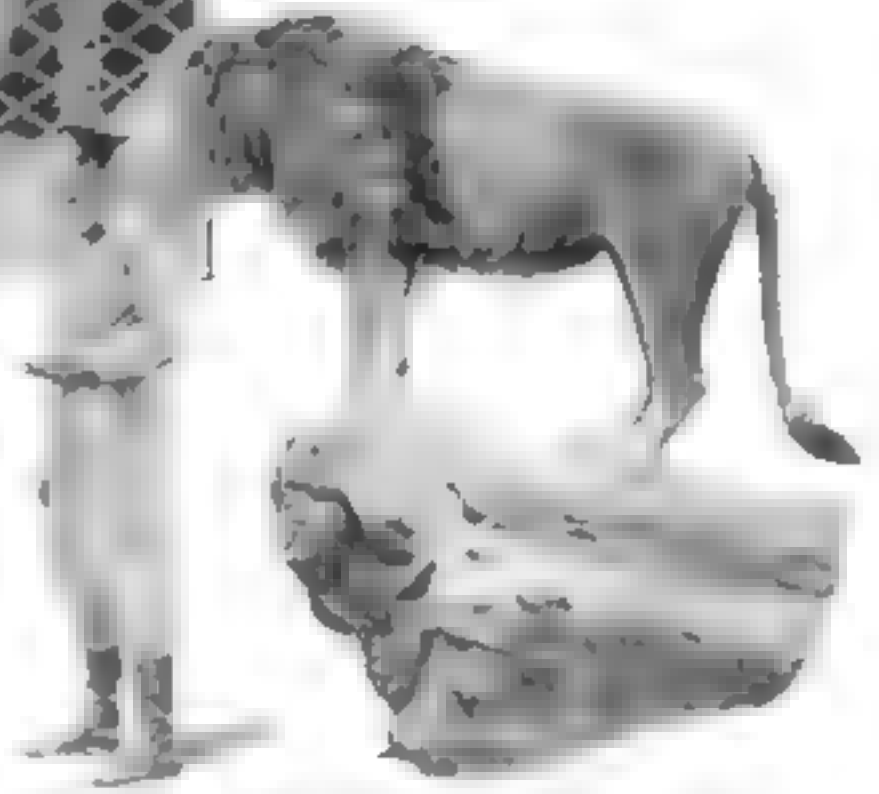

Duke is dean of the lion farm and also he is something of a movie star. Gay apparently believes him a safe companion.

ON THE outskirts of El Monte, Calif., I have a stock farm—a five-acre tract given over entirely to raising lions. This strange enterprise, now a flourishing business, has the distinction of being the only African Lion farm in the world.

On a dark night at my farm when the beasts are restless, it is not difficult to imagine one's self in the heart of the jungle. One animal will begin roaring and straightway the rest will take up the cry—a low-pitched, throaty bellow that swells reverberates, and dies away in a single resonant note.

Ten years ago, when Hollywood motion picture producers began to reach out for novelties and to feature wild animals three lions were sent to California in my charge from the Bostock Shows of London. These lions were known as Cyclone, Rosie, and Mary. Shortly after my arrival I found it possible to purchase this trio.

Rosie proceeded to celebrate the change of ownership by presenting me with three brand-new lions, and not long after Mary was equally generous. In fact, lions swarmed on me in such numbers that Mrs. Gay had to come to my aid. It was a new and thrilling experience for her, but she became so enthusiastic about it that she decided to have a farm where lions could be raised to supply the world's demand and could be trained for the movies and where from the very start the visiting public would help defray the expenses.

Five acres were selected at the little town of El Monte, and we laid out the farm to include a great stockade in which was built a systematic arrangement of corrals, cages, and pens with a novel system of tunnels for transferring animals from inclosures to cages. Today, we have 178 big cats, ranging from day-old bottle-fed babies to fully-matured beasts of both sexes.

Horses, goats, and chickens, which go to make up the food of the lions, are also quartered on the farm. Twelve goats and one cow are kept to provide milk for the babies. At first, the fuzzy little cubs are fed from the bottle every three hours. As soon as they learn to keep their feet out of their dinner they are fed from a pan.

At about this time their diet is changed to include an egg beaten up with the milk. At the age of eight weeks they get their first taste of raw meat, a little at a time added to the milk. As their tiny, needle-like teeth begin to develop, the meat allowance is increased. Lions over a year old are fed raw horse meat.

ADULT lions eat sixteen pounds once a day, which means that I have to supply eighteen hundred pounds of food each day.

Healthy lions are always hungry, but the surest way to get rid of them is by overfeeding. In order to supply their systems with the necessary vitamins and minerals, the meat is sprinkled with a powdered mixture of kelp and fishbone. Each lion is fed separately in a cage. Transfer from the yards and corrals by means of the tunnel chutes takes only a few minutes.

Nothing would start a battle royal so quickly as tossing their food in to them in the big outdoor cages. For that reason feeding houses are provided, each containing a row of ten heavily barred cages connected by sliding doors.

TEN animals are admitted at a time. They enter their dining room through a rear door and as each finds his accustomed cage the sliding door is pulled shut with a long iron rod. Meat is thrown in and it hardly passes the cage bars before huge claws are sunk into it and sharp teeth are tearing it apart. Stout ribs and half sections of vertebrae are reduced to crumbs. Meat and bone alike are dispatched in short order.

We have all learned that at feeding time we must use extra precaution in handling the big cats. Some time ago, a two-year-old cub developed the habit of lying in its cage at feeding time with its paws hanging out below the base crossbar. At the approach of an attendant it would vainly try to get hold of him. One day, the attendant approached too close and the "Bad Boy" reached out like a flash

of its big fan-shaped paws, claws unsheathed, man's hand, pulling it to the bars for

although a painful wound was the result. Many rajas on

then have taught that lion to keep its paws inside.

Bad Boy is one of

that can't be trusted.

cats have temperaments and individuality. One may be ever ready to pick a fight; another of

It is an axiom among us that the first thing

One of the most essential qualities of a successful trainer, in my opinion, is confidence—faith in himself and his subject. I [illegible] idea to suppose trained by sheer bru-

tality. To make him realize that his trainer is master requires firmness backed up if necessary by punishment in the shape of solitary confinement which deprives him of the privilege of running loose in the big arenas and sunning himself, of both of which he is extremely fond. It is therefore unwise and unnecessary to use guns and clubs.

WHEN I enter a lion cage I carry a .45-caliber six-shooter loaded with tear gas shells, the use of which is effective and in no way brutal. I have not yet had to use this revolver although I have had some narrow escapes from permanent injury. Such encounters, though invariably result from some little carelessness that should have been avoided.

For instance, one day a playful two-year-old lion pawed at my shoe. One of its claws caught in an eyelet. The young lion, becoming frantic with fear, grabbed the shoe in its jaws and severely crushed my foot. This was a painful lesson from which I learned that one should never wear shoes with eyelets when visiting the [illegible]den.

How does the successful trainer know when it is time to get out of the cage? He doesn't know; he senses it. Some deeply [illegible]n faculty developed only through [illegible]t contact with the big cats, tells him [illegible] to leave. Aside from that, there is a [illegible]de bureau of gauging a lion's state of [illegible]. His eyes tell you.

When the pupil is just a tiny black point against the green, he is at rest, peaceful contented, happy. As he becomes excited or aroused, the iris dilates. When pained, fully aroused, or about to charge, the pupil reaches almost from the upper [illegible] lower lid.

EVEN when they are trained lions are in no sense tame animals. Their nature and general demeanor stand in the way of their becoming highly successful performers. However, in my band of animals there are several that are famous all over the world for their movie stunts. Nero, a black-maned Abyssinian male [illegible] was added to the band during the [illegible]nd year, has earned more than $70,- [illegible] as an animal actor in moving pic[illegible] He has "stolen" many pictures with his businesslike method of doing what is required of him.

The runner-up for popularity is Leo, trademark of one of the big producing companies. His mighty head is daily seen by world-wide audiences as he flashes on the screen to roar a welcome in pantomime.

Thus far, my trained lions have brought in the bulk of revenue while the daily attendance of visitors at the farm more than pays expenses. It has taken ten years to get the breeding stock in proper shape for disposal, and even now we are not quite ready to unload our product, although we have on file scores of orders from zoological parks and circuses in many parts of the world.

One of the strangest offers we ever had came from a Chinese doctor who offered a dollar apiece for lion whiskers with which to concoct a mysterious remedy for human [illegible]

Finding a convenient stump, this serious faced cub carelessly hangs himself out for a good sun bath.

Not infrequently the lioness will desert her [illegible] necessary if the youngsters are to survive. Here Mrs. Gay is attending to the insistent demands of a little fellow who is only eight days old. In seven weeks he will eat his first meat.

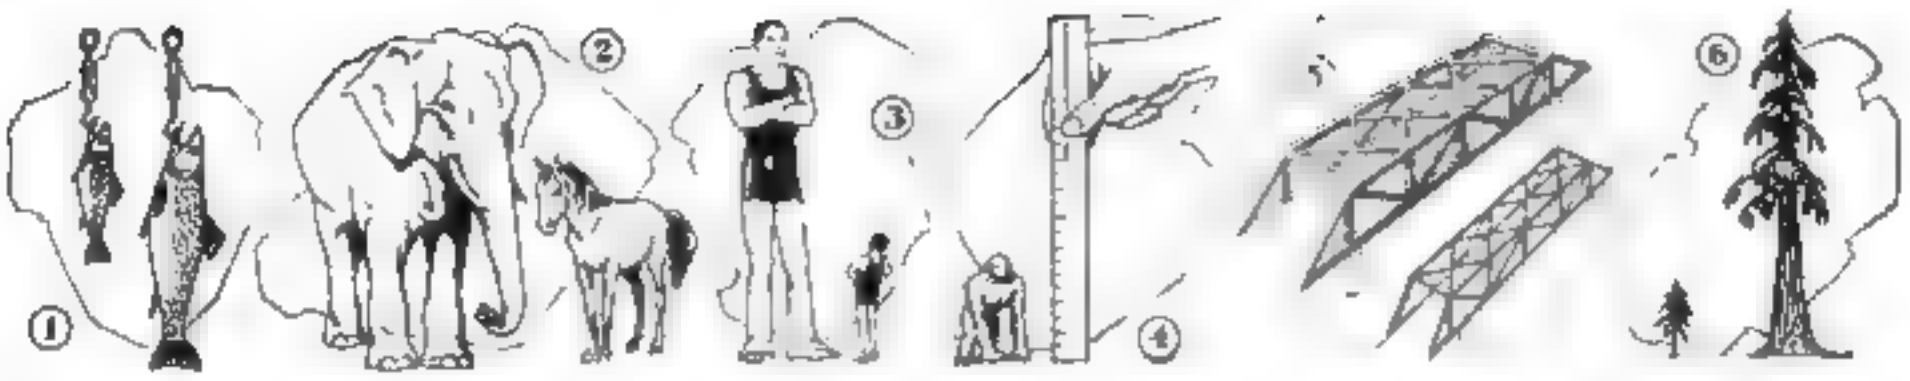

Why Can't Men Become Giants or Jump Like Grasshoppers?

This Article Gives You One Simple Rule That Answers Many Baffling Problems

By GAYLORD JOHNSON

1 Why does a fish's weight increase eight times while it grows to only double its length?

2 Why are an elephant's legs so much thicker in proportion to his size than a horse's?

3 Why do men never grow to be eighteen feet tall?

4 Why would men, if on the planet Jupiter be midgets only a few inches high?

5 Why would a steel bridge 150 feet long (built in exactly similar proportions to one seventy-five feet long) be comparatively much weaker?

6 Why is a 150-foot pine tree thicker at its base in proportion to its height than a thirty-foot tree of the same species?

7 Why do whales sometimes grow to be 100 feet long?

8 Why can a mouse fall down a mine shaft and be merely stunned, while a man is killed and horribly mangled?

9 Why can a humming bird stand still in the air over a flower, while an eagle must run along the ground before it can rise from the ground at all?

10 Why is it impossible for a man to fly by means of wings propelled by his own muscular power?

11 Why can a grasshopper jump dozens of times its own height, while a man can rarely leap over a shoulder-high fence?

12 Why would skyscrapers like the Chrysler and Empire State buildings be impossible without steel?

THE mechanical principle that clears up all of the questions asked in the column at the left is contained in any cubic block of wood—yet they will puzzle nine out of ten men who lack engineering training.

To find this principle, understand it, and use it, we need nothing but the block and a handsaw. And if we like, we can *imagine* both block and saw.

Take your cube and saw (either real or imaginary) and use them to discover this fundamental law of mechanics, in the same way that Galileo did away back in the seventeenth century. Then you can solve any problems like these with common sense and common arithmetic.

You may as well follow Galileo's own directions, word for word, for he wrote them down in a book, which, by the way, for the first time in history explained mechanics as an orderly science.

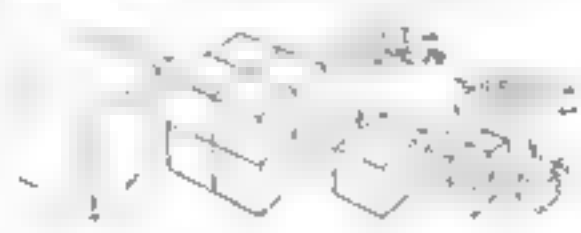

Take," says Galileo, "a cube two inches on a side so that each face has an area of four square inches and the total area, i.e., the sum of the six faces, amounts to twenty-four square inches; now imagine this cube to be sawed through three times so as to divide it into eight smaller cubes each one inch on the side, each face one inch square, and the total surface of each cube six square inches instead of twenty-four as in the case of the larger cube.

"It is evident therefore that the surface of the little cube is only one fourth that of the larger, namely, the ratio of six to twenty-four; but the volume of the solid cube itself is only one eighth, the volume and hence also the weight, diminishes therefore much more rapidly than the surface. If we again divide the little cube into eight others we shall have, for the total surface of one of these, one and one half square inches, which is one sixteenth of the surface of the original cube; but its volume is only one sixty-fourth part.

Volume Diminishes Faster than Surface

"Thus, by two divisions, you see that the volume is diminished four times as much as the surface. And, if the subdivision be continued until the original solid be reduced to a fine powder, we shall find that the weight of one of these smallest particles has diminished hundreds and hundreds of times as much as its surface. *And this I have illustrated in the case of cubes holds also in the case of all similar solids.*"

Galileo did not put these last words in italics, but I have, for they contain the key to the first of our problems. A six-inch black bass and the same fish when grown to twelve inches are "similar solids." Our law of mechanics applies equally to these two sizes of fish and to any two sizes of Galileo's cubes.

In fact, we may, if we choose, assume that each fish is made up of many tiny cubes, as suggested in the diagram on the opposite page.

Let us take an imaginary knife, cut up the six-inch fish into imaginary cubes, and count them. We can of course suppose our cubes to be small enough to be included in the thickness of the fins, but for convenience in figuring we will disregard all the fins and make our cubes one eighth inch on each side. The volume of each cube will therefore be one five hundred

and twelfth of a cubic inch. Assuming the fish's volume to be fourteen cubic inches, it will contain 7,168 cubes.

Any growth in size which we imagine for any *one* of these 7,168 cubes must happen equally to *all*, and the growth in size

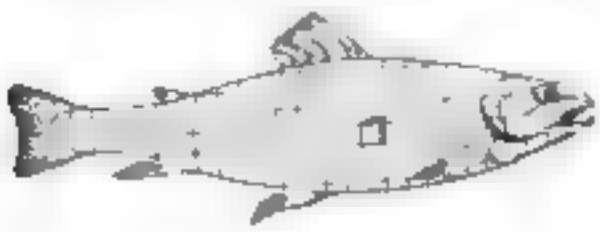

of the fish will be the sum total of the growths of all the little cubes it contains.

Volume of Fish Varies As Cube of Its Length

Let us fancy that the cube outlined in the diagram has grown gradually from one eighth inch to one fourth inch on each side. We know from Galileo's illustration that in doing so it has increased its volume eight times—from one five hundred and twelfth to one sixty-fourth of a cubic inch. Is it not plain at once that the entire fish (still composed of 7,168 cubes) has also increased its volume eight times? We have therefore proved by cutting up the fish into tiny cubes, or dice, and watching each cube grow, that *the volume of the fish varies as the cube of its length, since this is the rule that holds true for each of its tiny cubic components.*

There is an application of this rule which, if you know it, will enable you to surprise a friend by the accuracy with which you can "guess" the weight of a fish. You need only know the weight of some particular length of the *same kind* of fish.

If you know, for instance, that a six-inch bass weighs half a pound, or eight ounces, you can "weigh" a twelve-inch bass by simply measuring it! Here is how it works: The weight (volume) varies with the cube of the length. This being true, the weights of any and all sizes of the same variety of fish, when divided by the cubes of their lengths, will always yield approximately the same number. If you know this constant figure for a six-inch bass, you can find the weight of a twelve-inch one simply by multiplying the cube of twelve by this constant figure.

How much does a six-inch bass weigh? We have said half a pound. Then eight ounces divided by the cube of six, or 216, will give us our constant figure. It works out to be .037. This fraction when multiplied by the cube of twelve or 1,728 gives about four pounds—the weight of the twelve-inch bass.

The problems about the great thickness of elephant's legs, the impossibility of human giants, the stature of men on Jupiter, the comparative weakness of a large bridge proportioned like a smaller one, and the greater relative thickness of larger trees can all be explained by the results of the following simple experiment suggested by Galileo. A reference to the diagram below will help to make the experiment plain at a glance.

The materials required are a supply of square rods of two sizes. One size is one fourth inch square and a yard long. The other is one half inch square and two yards long. One is just twice the dimensions of the other. We shall also need two baskets exactly alike in size and weight, a couple of small iron clamps, and a stepladder.

Two of these rods (one of one fourth inch size, the other one half inch) are firmly clamped to the top step of a stepladder, projecting in opposite directions, as shown in the diagram below. The basket handles should be tied to the ends of the rods, to prevent them slipping off.

The purpose now is to find the number of one-fourth-inch one-yard rods that can be put into the basket supported upon the one-fourth-inch one-yard rod, and how many one-half-inch two-yard rods can be

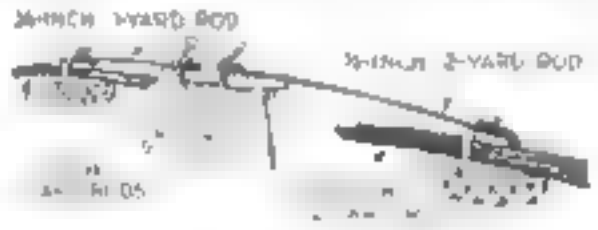

added to the basket hanging from the one-half-inch two-yard rod, before each of the rods breaks under its load.

Let us try to predict the result, using the rule we learned from Galileo's cubes and applied to the two fish. "The area increases with the square of the linear dimensions, while the volume (or weight) increases with their cube."

Cross Section Determines Resistance

In the case of these two supporting rods, we are interested only in the areas of their *cross sections*, for these determine their comparative resistance to breakage. The square of the one fourth inch diameter rod is one sixteenth square inch. That of the one half inch diameter rod is one fourth square inch. The one-half-inch rod is therefore four times as strong, will support four times the weight before breaking that the smaller one will.

But the volumes (or weights) of the two sizes of rods are to each other as the cubes of their diameters. The yard-long rod is made up of 144 one-fourth-inch cubes; the two-yard rod contains an equal number of one-half-inch cubes. One of the one-half-inch rods therefore weighs eight times as much as one of the one-fourth-inch ones.

What will eventually happen if we progressively add one rod at a time to each basket? It is easy to predict. Since the larger rod is eight times heavier and only four times stronger, *it will support far fewer of its own kind without breaking than the smaller rod will.*

If the one-half-inch rods weigh six ounces each and the one supporting the basket breaks when ninety of them have been placed in it, we know that it will resist a weight of thirty-three and three fourths pounds. But the one-fourth-inch rod is only one fourth as strong. If we continue adding rods to the ninety already in the basket it supports, how many will be in it when the support finally gives way? Obviously, it will break when the weight equals one fourth of thirty-three and three fourth pounds, or about eight and seven sixteenths pounds. And since each one-fourth-inch rod weighs one eighth of six ounces, or three fourths of an ounce, we can add ninety more one-fourth-inch rods to the basket, making 180 in all, before the one-fourth-inch supporting rod breaks.

Why 150-Foot Bridge Is Weak

Let us think of the seventy-five-foot steel bridge as being built up of rods. If we make its length 150 feet, we must double the length, breadth, and thickness of every rod in it. This operation will then of course multiply the bridge's total weight eight times, and increase its ability to support loads only four times. The larger bridge of similar proportions is obviously unable to carry twice the maximum load of the smaller, for part of its strength is already being used to support its own greatly increased weight. This also explains why bridges and tall buildings are built with I-beams and other shapes that give maximum strength in proportion to weight.

Suppose a man six feet high weighs 175 pounds. At eighteen feet high he would weigh twenty-seven times that—or nearly two and three eighths tons if all other dimensions were increased in the same proportion. If the thigh bone, or *femur*, of a normal-sized man is assumed to be one and one half inches in diameter, the same bone in a giant such as we have imagined would need to be nearly eight inches thick, while its length has increased only three times!

The two bones shown above are from a sketch made by Galileo to illustrate his explanation of this point. He says in conclusion, "You can see how out of proportion the enlarged bone appears. Clearly then if one wishes to maintain in a great giant the same proportion of limb as that found in an ordinary man he must either find a harder

(Continued on page 144)

NEW CHECK DESIGNED TO PREVENT FORGERY

No BULKY "check protector" is needed to guard against fraudulent check-raising, with a new printed form designed by M. Pnagouni, of Brooklyn, N. Y.

After the check is written in the usual way, three places are punched, two of them safeguarding the amount and one the signature. A punch mark in an "Amount Table," at upper right, prevents adding another figure to the amount. The denomination of the check is indicated in punch marks in an "Amount Control Table." A final protection is a "Name Control Table" at extreme left, where numbers are punched according to the number of times each letter appears in the signer's name.

In the photograph above, the inventor demonstrates how the check is punched

DOUBLE KEYBOARD PIANO PERMITS NOVEL EFFECTS

A PIANO with two keyboards recently was perfected by Hans Barth, piano virtuoso, who used it on a concert tour he has just completed that took him from the Atlantic to the Pacific coast. Its upper keyboard is tuned the same as that of an ordinary instrument, but the lower one is pitched a quarter of a note lower. The quarter-tone keys permit new and unusual harmonies, such as those of Chinese and other Oriental music employing the quarter-tone scale. There are fourteen white and ten black keys to an octave, instead of seven white and five black.

The inventor, seen seated at the end of the piano in the picture below, is shown demonstrating his new piano to George Gershwin, noted pianist and composer. This instrument is intended for concert use only and naturally will not replace the single keyboard pianos now used in homes. Not every pianist would be able to play Barth's piano.

Hans Barth (seated) shows his new quarter-tone piano to George Gershwin, who finds unusual harmonies on it

DISTILLED CHROMIUM MADE IN VACUUM

EVERYONE knows the polished finish of chromium plate on auto radiators or bathroom fixtures, but few have ever seen an actual lump of that metal. When commercial establishments use chromium, they obtain it in the form of "ferrochrome"—a grayish alloy with iron.

Recently, however, experts of the Westinghouse Research Laboratories at East Pittsburgh, Pa., exhibited a lump of the pure metal as big as one's fist. It was the world's first specimen of distilled chromium, and was made in an almost perfect vacuum.

AUTO SAFE IN EARTHQUAKE

Automobiles are earthquake-proof, says Doctor T. A. Jaggar, American volcano expert. Recently while driving in one of the Hawaiian Islands he passed through a district that was experiencing a severe shock. He did not know about it until informed afterwards.

BIG CAR RUSHES PAPERS TO STANDS

RESIDENTS of Berlin, Germany, find their newspapers now appear a few minutes earlier on the news stands. A huge streamlined truck whizzes through Berlin streets to outlying districts of the city at fifty miles an hour. Within it are bundles of newspapers for stands along the route. The old 100-horsepower car is one distributor's answer to rivalry in getting the papers on the streets first.

Competition among newspaper distributors in Berlin, Germany, led to the production of this 100-horsepower streamlined car which rushes the papers to the news stands.

THIRTY-ONE BIG TICKER SYSTEMS KEPT BUSY

EVERYONE is familiar with the stock ticker of commerce, but not everyone knows, according to Western Union officials, that this telegraph concern alone operates thirty-one kinds of tickers.

Sport news goes out over one great ticker network. Marine news is an important ticker service described recently in this magazine (P. S. M., Jan. '31, p. 22). Individual ticker circuits report the prices of commodities such as cotton, grain, rubber, and hides. New York's Stock Exchange and Curb Exchange have four high-speed ticker systems.

NEW DIAL PHONE DEVICE SHOWS NUMBER CALLED

GETTING a wrong telephone number, an annoyance both to the caller and the person responding, would be averted through the use of a device invented by a Portland, Ore., merchant. After being repeatedly called from a sick bed by careless users of dial telephones, he devised an attachment for this type of instrument to show the caller what number he is dialing.

Within the conventional circular ring of letters and numbers is a registering set of numerals resembling an auto mileage indicator. As each letter or figure is dialed a duplicate of it appears in the center. Thus the user can see at a glance if he has dialed the wrong number. If so, he can hang up and avoid completing the call. The figures remain in view until another telephone number is dialed.

POWER CABLES IN OIL ARE SAFE FROM WATER

RUNNING high-tension electric cables underground in oil-filled casings is the method recently adopted by an Ohio public utilities company to keep water out of their lines. Four 66 000-volt lines are buried in separate trenches three feet deep. Each line is divided in three cables which are twisted together something like the strands in a rope. Between the "strands" are placed oil channels. Since water and oil do not mix, the water is kept from the electric wires by the oil.

USE RADIO PILLOW IN PLACE OF HEADPHONES

WHEN the listener's head rests on a new "radio pillow" he can hear music coming from a loudspeaker concealed within. A radio concern perfected this innovation so that hospital inmates might enjoy broadcast programs without disturbing other patients, and without wearing earphones. It may also be put into Pullman berths and chairs on ships.

This type of radio set is the place of headphones.

WORKSHOP MICROSCOPE REVEALS ALL DEFECTS

ESPECIALLY designed for use in the machine shop is a commercial microscope recently placed upon the market. It aids inspection for defects of material or workmanship, magnifying them forty times. Fitted to its eyepiece is a scale graduated to thousandths of an inch, so that the size of imperfections may be measured.

WHEAT RUST BRED TO LEARN HOW TO END IT

AT WASHINGTON, D. C., and at Winnipeg, Canada, exist the organisms of plant diseases that would wreak havoc if released in the wheat fields. The Washington species, a variety of "wheat rust," is so virulent that it will attack types of grain hitherto immune from parasites. Experts of the U. S. Department of Agriculture produced the virulent wheat rust by breeding for it. The object is to learn how to fight new hybrid diseases.

SWITCHBOARD HANDLES FOREIGN CALLS

One switchboard in the New York office of the Bell telephone system handles all calls to countries overseas and in addition will connect subscribers in America with ships at sea.

THE average telephone switchboard may cover a town or part of a city, but a few girls at one New York City panel have most of the civilized world at their finger tips. This special switchboard of the Bell telephone system handles all its overseas calls. A placard above each operator's section shows what foreign point she is handling. Side by side sit girls who will plug in your call to London, Buenos Aires, Paris, Havana, or Mexico. At the center of the group shown in the photograph at the left, one operator connects subscribers in the United States with ships at sea equipped for radio telephone.

WORLD'S BIGGEST PLANT

PROBABLY the largest plant in the world is a rare species known as the "box huckleberry." The trailing creepers of a single specimen of this amazing plant can cover one hundred acres with a thick mat. The plant seldom reaches a height of more than six inches, according to the Museum of Natural History. It takes hundreds of years to reach its

BUS ENGINES SPEED UP GERMAN STREET CAR

A novel street car recently developed in Dresden, Germany, has a sharp narrow vestibule for the driver that not only gives an unobstructed view ahead, but permits the operator to see if motor cars are approaching from the side on turns. The car is driven at high speed by four motor bus engines working through electric drive. It will get up speed, both ahead and in reverse, much faster than ordinary street cars of the trolley type

Passenger comfort has been provided for by heavily-upholstered seats, deep windows, with a table at each one, and specially-designed springs to insure riding comfort. Designed for operation at a speed equaling that of a motor bus, these cars are equipped with efficient mechanical brakes with which they can be stopped as quickly and as easily as a bus to avoid accident when an emergency arises.

Four engines are used to drive this Dresden, Germany, street car at the speed of buses.

SLOT MACHINE SELLS PHONOGRAPH RECORDS

Now phonograph records are being sold by slot machines. An automatic vender has recently appeared outside London theaters and shops that delivers a popular song hit upon the insertion of a coin. The records it sells are lightweight, flexible, and almost paper-thin, resembling an unbreakable record that recently appeared

SECRET OF BELGIUM'S "POISON FOG" FOUND

Investigators have solved the mystery of Belgium's sensational "poison fog" which caused the death of more than sixty persons a few weeks ago. Sulphurous fumes combined with the unusually thick fog to make an acid that attacked the lungs of the inhabitants. Presumably the noxious fumes came from the smokestacks of industrial plants in the Meuse Valley

Any American industrial center generates similar fumes, but the possibility of a "poison fog" is remote because rarely do meteorological conditions in this country favor a dense fog of long duration

BIG WIRELESS STATION HAS STRANGE ANTENNA

The antenna arrangement at the world's most powerful wireless station, Rugby, England, resembles a huge spider web of steel and copper wires. From the odd-looking maze of wire atop the tall masts of the station, a network of radio communication extends to most parts of the world. Radio operators on ships on all seas are asked to stand by daily to receive the bulletin sent out regularly from Rugby's powerful instruments. It can send messages to all parts of the British Empire—India, Australia, Canada, and islands in the Pacific

Rugby is equipped to transmit wireless telephone messages as well as those in telegraph codes. Four channels of communication between Rugby and the United States are now in operation and a fifth is being constructed. Separate aerial systems, for the purpose of communicating with nations to the west, south and east have been installed so that it is possible for this station to reach practically every part of the globe at the same instant

This spider web affair is merely the strange antenna at the most powerful wireless station

GIANT GAS JET HAS 15-INCH OPENING

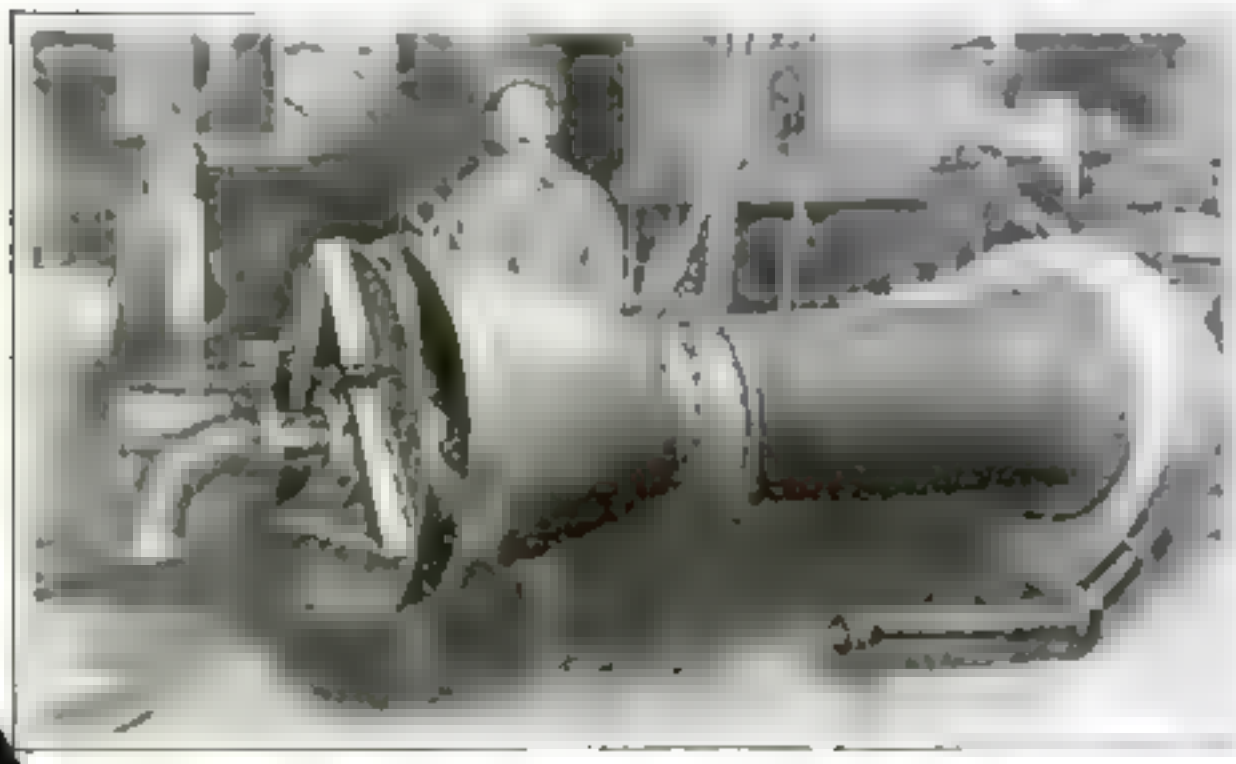

Imagine a gas burner that in four hours burns enough gas to heat the average home for a whole winter! Said to be the largest in the world, this one was recently installed in the Johnstown, Colo., plant of a sugar company. The burner is fourteen feet long and at the opening it is fifteen inches in diameter. It burns 50,000 to 60,000 cubic feet of natural gas an hour

Installed in apparatus used for the manufacture of sugar this device is said to have effected a saving of forty percent in firing as compared with coal.

CUTS WEIGHT OF EARTH

The earth is 600 billion tons lighter, in the latest estimate of its weight. This does not mean that the equator is shrinking but simply that Dr. Paul R. Heyl, in his subterranean laboratory at the Bureau of Standards, has weighed the earth more accurately than has been done before.

BOX CAMERA CAN NOW TAKE PANORAMIC PHOTO

Anyone can make panoramic pictures with an ordinary inexpensive box camera, through a recent invention.

Hitherto special cameras have been required to make elongated "panoramic" pictures, covering a wide angle of view, and such machines have been beyond the purse of the average amateur. Not long ago Walter Davis, an Atlanta, Ga., disabled veteran who served as an aerial photographer during the World War, devised an attachment to enable a box camera to do the same job.

This attachment is a special head, in the form of a dial, interposed between the camera and the tripod on which it rests. To make a panoramic picture, the user snaps the shutter, then turns the camera horizontally until the dial indicates that the camera is in correct position for a second shot. The film is turned for a new picture, and exposed again. Any number of exposures can be made, until the camera has been turned in a complete circle if desired. The finished print shows no line or blurring where successive exposures join. Specially-marked film and a slotted disk to cover the lens are used

Miss Franklin Davis demonstrates with new camera

SPRING IN SET SCREW HOLDS DOOR KNOB FIRM

A self-locking screw for door knobs recently has been placed on the market in Boston, Mass. The small headless set screw that keeps knobs from working off the square spindles of locks is hollow, containing a little coil spring, shown in the accompanying illustration. One end of this presses against the spindle, the other against the inside of the screw, forcing it against the threads tapped into the knob and securely holding the screw. While the screw cannot come loose accidentally, it can be removed easily with a screw driver. This device is designed to eliminate one of the annoyances to which the average householder has been subjected. Rattling knobs, or one that comes off in the hand when an effort is made to open the door, are, according to its manufacturer, prevented.

NEW ENGLISH CAR HAS MUDGUARD ON DOOR

Fixing a section of mudguard to the rear door is the idea hit upon by an English motor car manufacturer in getting the biggest body on the smallest chassis. Since the car was a light one designed for the use of families with small incomes, this method of economizing on body room and therefore on weight and gasoline consumption was necessary. The result was a five-passenger sedan on a chassis much smaller than would ordinarily have been used

With the rear mudguard fastened to the door of this little car, a tiny chassis was possible.

THIS GIANT AND PYGMY GIVE SAME POWER

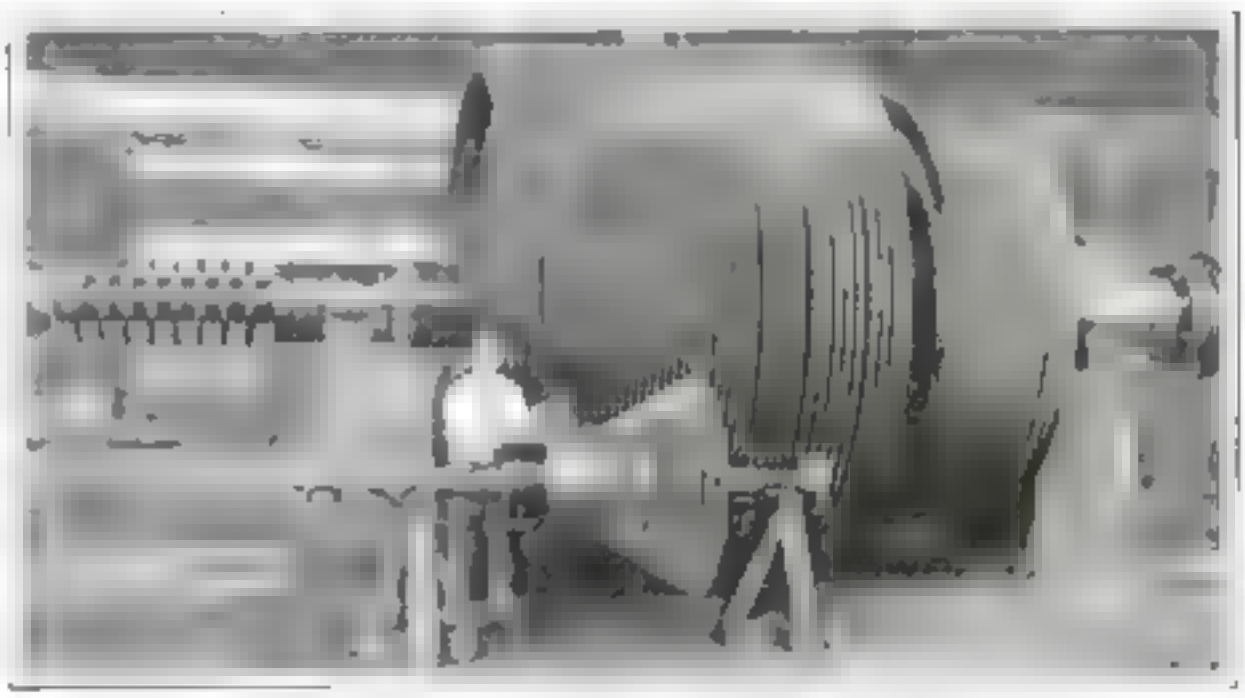

It is all a matter of speed, and the giant turbine spindle seen in the background turning slowly delivers exactly the same power as the little fast-turning rotor near it

Different as they are in size, these two turbine spindles deliver approximately the same horsepower—7,000 each. The larger spindle in the background is for the United States battleship *Pennsylvania*, and works directly on the propeller shaft at 240 revolutions a minute

The smaller rotor, seen with the man standing behind it, is for a higher speed vessel, such as a destroyer or yacht, and turns at 3,600 revolutions a minute, driving the propeller at lower speed through a reduction gear. The difference in speed causes the contrast in size between these turbine parts, which were photographed at the South Philadelphia, Pa., works of the Westinghouse company

USES DISEASE GERMS TO MAKE A BATTERY

Making an electric battery out of disease germs was a recent feat of Dr Barnett Cohen, of the Johns Hopkins Medical School. With wire he hooked together a set of glass vessels containing, alternately, cultures of growing germs and sterile solutions. A small but measurable electric current began to flow

COIN-IN-SLOT GASOLINE PUMP SERVES MOTORISTS

Dropping a coin in the slot will start this gasoline pump going. Many like it are in use in West

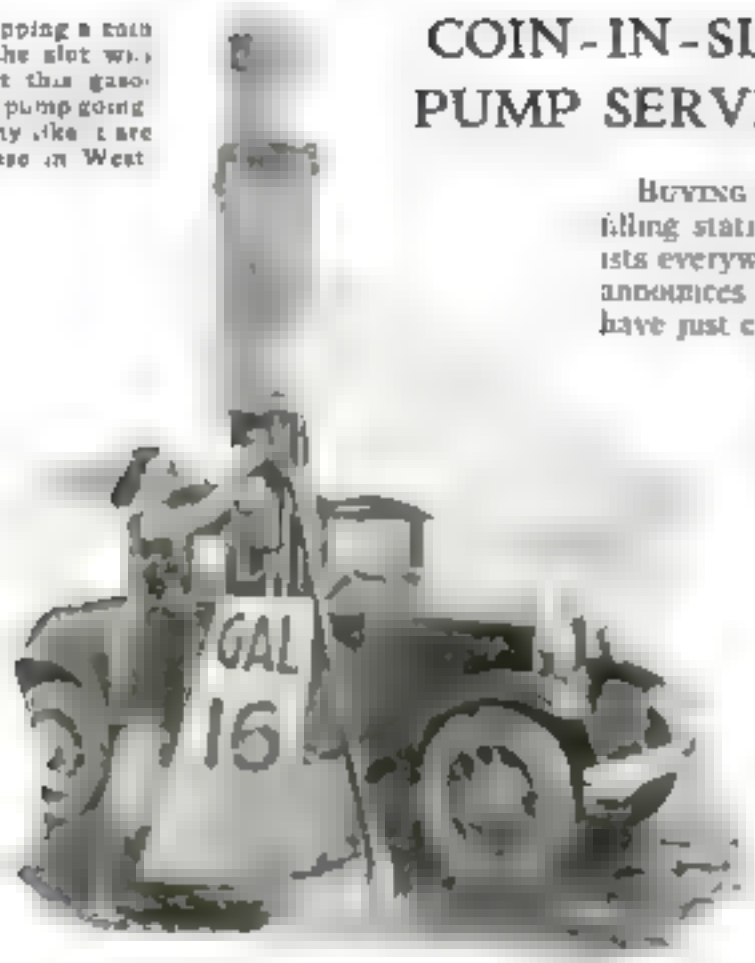

BUYING gasoline from a self-service filling station is brought nearer to motorists everywhere by a Colorado firm, which announces that its "robot" gasoline pumps have just completed successfully extensive tests in actual service

When the motorist drops a coin in the slot—a quarter, half dollar, or a silver dollar—the robot automatically delivers to him the correct amount of gasoline. He can buy "gas" at any hour, is sure of accurate measurement, and need not wait for service or for change. From the service station owner's point of view, the robot saves the salary of an attendant and eliminates loss from his possible mistakes Colorado stations that have installed the gas-selling robot report its operation as satisfactory

GAGE GIVES THICKNESS OF GLASS IN BOTTLE

A NEW instrument, called the "optical thickness gage," which looks like a periscope, measures the wall thickness of sealed flasks and bulbs. In many instances this knowledge is of great importance Glass tubes must often withstand either high pressure or high vacuum within certain margins for the safety of the user and for economy of production

The "optical thickness gage" is so simple to use that girls with no knowledge of physics or the laws of reflection and refraction operate it. The electric arc is held before an opening in the instrument as shown in the picture and the thickness of the glass wall is read on a scale in the eyepiece in which the girl is looking

AQUEDUCT "SHINED" FOR MORE WATER

ENGINEERS of Los Angeles are just completing a 125-mile job of polishing That city's water supply flows through a 250-mile aqueduct. As the city's growth increased the burden on the aqueduct a.lf of its interior was polished so water will flow through it faster before in greater quan

foot of brick pipe so treated runs underground through the Mojave Desert. It relined with a fine grade of smooth finishing cement

Manholes were cut at 500 foot intervals in its top and cement mixers poured materials through forms to work men underground. Thirty miles of inside surfacing was done in a ten-day period. It is estimated that refinishing the pipe line will furnish an additional 28,000,000 gallons of water

Inside the Los Angeles aqueduct which is being lined with smooth cement. In circle, the cement mixer busy in desert.

WASHING MACHINE MOTOR USED TO RUN BICYCLE

DONALD SMITH, of Flemington, N J

or pusher" for his bicycle from a washing

gasoline engine At- ached to the rear it pushes it along at

r

er brake on the bicycle prevents

or

ince the engine ...ch both ...pedaling ... it along the road

Donald Smith, Flemington, N J riding his bicycle powered with washing machine motor

PUTS EARTH'S AGE AT 1,852,000,000 YEARS

How old is the earth? It celebrates its 1,852,000,000th birthday this year, according to a new estimate made by Dr. Alois F. Kovarik, of Yale University. He reckons its age from the "decay," or amount of change, of elements in the rocks.

The earth, when born, contained all the elements we know today, including uranium. Ever since the earth's birth, a portion of its uranium has been turning into radium, which in turn has been slowly changing into lead.

The rate of this change, or "decay," is known, and is believed to be unalterable. By measuring how far the decay has progressed in "uranite," a mineral from Russia, Dr. Kovarik arrived at his figure.

NUT WITH ELASTIC RING CAN'T WORK LOOSE

A new nut for use on all kinds of machinery from automobiles to airplanes and turbines cannot work loose. The threads of bolts on which it is used cut their way through an elastic fiber ring at its top. This draws the nut up until its metal threads press against the sides of threads on the bolt, making it impossible for them to work loose through vibration.

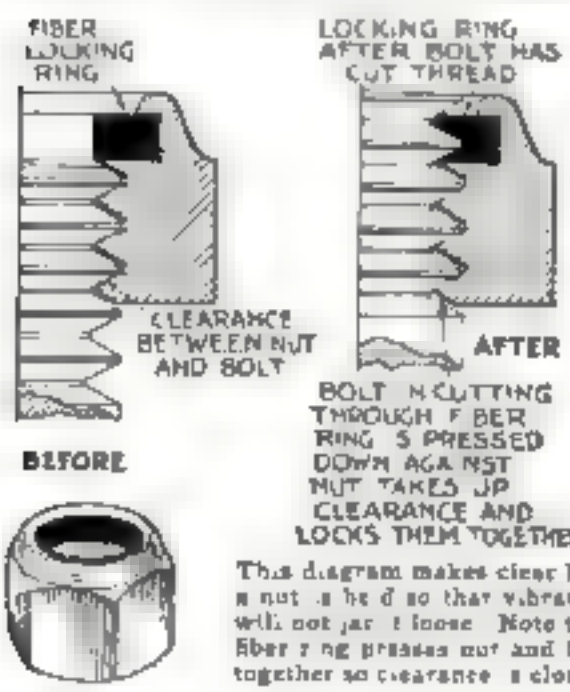

This diagram makes clear how a nut is held so that vibration will not jar it loose. Note that fiber ring presses nut and bolt together so clearance is closed.

TALL BUILDING RAZED WITH CHARGES OF DYNAMITE

House wreckers in Baltimore, Md., the other day pushed a 150-foot grain elevator over by dynamite. They placed the charges so that when they were set off the tall structure fell upon the exact location they had previously selected. So sound was the concrete building that its walls did not crack from the explosions but it fell in one piece, then was shattered as it struck the ground. Many panes of glass remained intact as it toppled. This method of wrecking the building saved much time, for the concrete was broken into fragments that were comparatively easy to handle. At right the building is seen still intact as it fell.

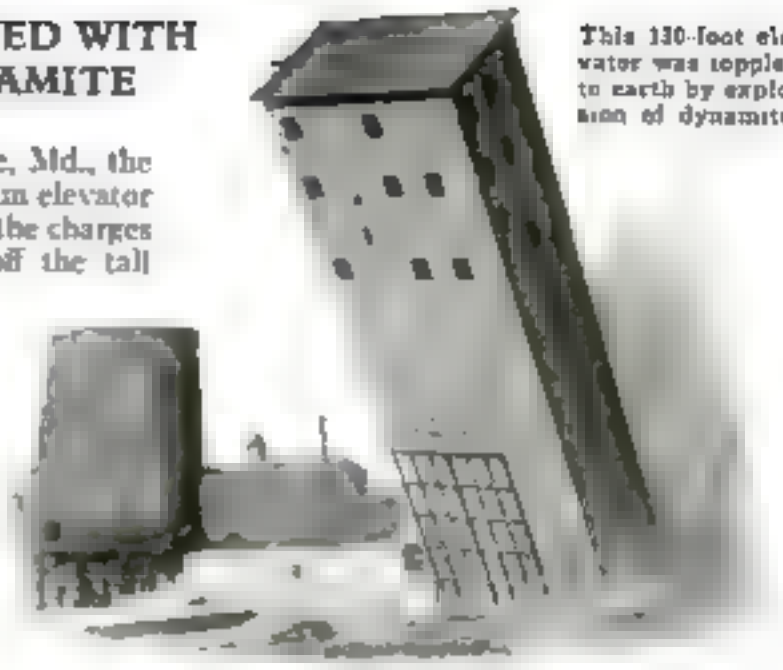

This 130-foot elevator was toppled to earth by explosion of dynamite.

So skillfully were the charges of dynamite placed under this building that it fell upon spot selected.

These two Austrians set a record when they took motorcycles to the top of Alpine peaks.

RIDE MOTORCYCLES TO TOP OF AUSTRIAN ALPS

Two young Austrians, Herbert Sartorius and Toni Pospischil, recently established what they believe to be a world's altitude record for motorcycles. They drove their machines to the top of a high peak in the Austrian Alps in the course of a trip from Carinthia to Tyrol, two provinces of Austria.

Most of their route lay over mountain passes, snow fields, and rough mountain roads. Disaster nearly overtook the daring riders many times on their trip. Exceptional driving skill and the reliability of their machines, however, enabled them successfully to accomplish the difficult feat. They carried extra fuel and a complete repair outfit with them so that in the wildest sections they were far from helpless.

COMPLETE NEW HOUSE COMES BY TRUCK

Delivering a complete house to your property by motor truck is the plan of a Farmingdale, N. Y., firm. Small steel frame dwellings are put together at its plant and equipped with range, water heater, electric fixtures, and bathroom fittings.

These are not sectional houses, but structures permanently put together and all ready to live in. They are supplied in sizes ranging from three to five rooms, with or without a garage. This system of steel framing is said to have speeded up construction and proved as satisfactory in small dwellings as in skyscrapers.

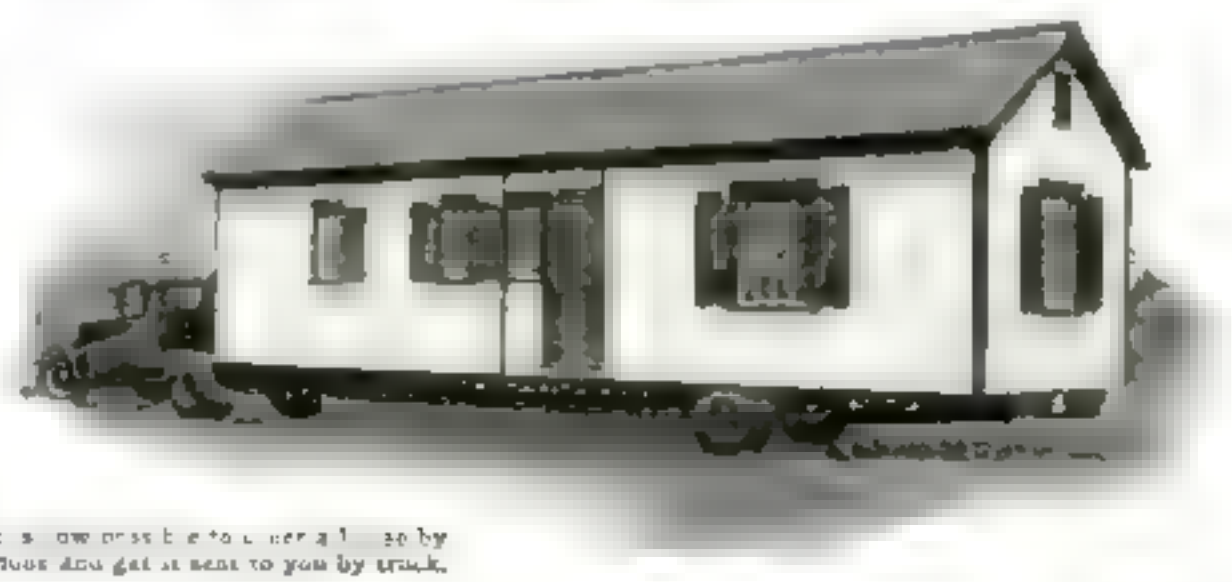

It is now possible to order a house by phone and get it sent to you by truck.

Where Worlds Are Turned Out in an Endless Procession

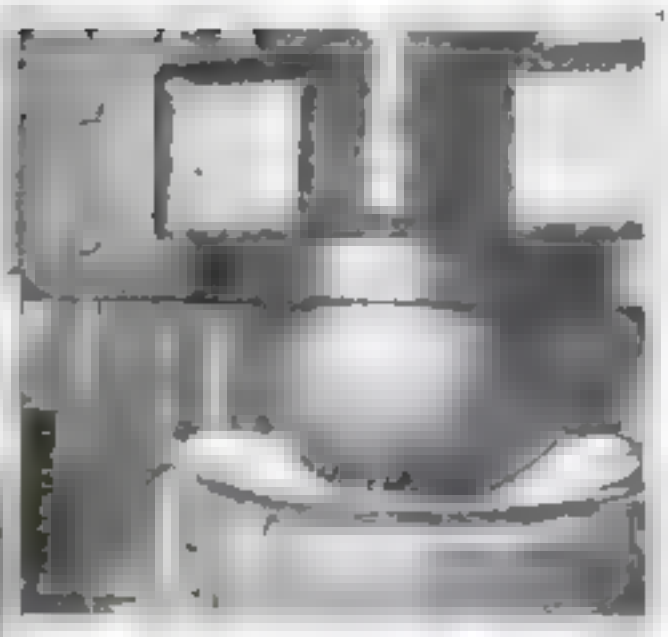

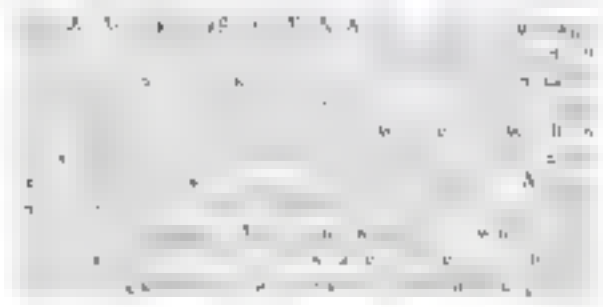

THE MAP OF THE WORLD

Thin room the strips that make up the map of the world are pasted on with huge patterns. The most difficult task is reserved only to the skilled workers, as the edges of the strips must match perfectly

WORLDS OUT TO DRY In the upper left the photo shows the finished globes which after being varnished, are hooked to long poles and left until the outer coating has dried hard. Note that the worlds are of various sizes from the little fellow designed for the use of children to the big ones fit to grace a corner in the library of an accomplished geographer. When dry the globes are ready to be packed and shipped away

SECTIONS OF THE WORLD Many of the world are printed on great sheets of paper from which they are cut out by hand, as shown above. This work is done with the utmost accuracy as the strips are later pasted over the sphere as seen in the picture at left above. Practice and steady nerves are necessary on the part of those doing this work.

MATCHING HEMISPHERES When the two parts of the basic sphere come to this room, they are matched together with the utmost precision and sealed solidly in place. This operation, with both men and women engaged at it, is shown in the picture at the left. The next step is the pasting on of the map strips. Few of the steps in the making of a globe are done by machinery because there is no demand for mass production, the market being limited.

Soldier's Life Made Easier

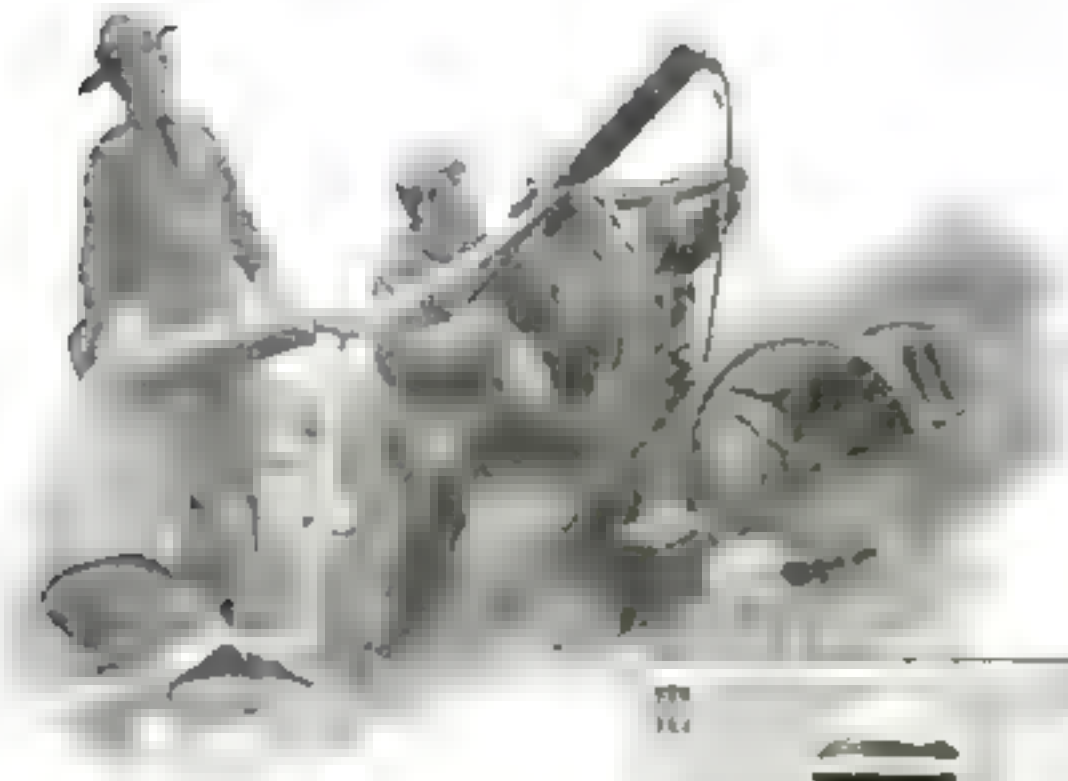

MACHINE GUN ON WHEELS Formerly a machine gunner carried his weapon on his back and carried it into battle. This heavy and exhausting work is no longer necessary as the gun is now mounted on a rubber tired, ball bearing cart which is easily dragged along into action. This is only one of many things that have been done to make the life of a soldier in today's Army less arduous.

DESIGNED TO MAKE SOLDIER HAPPY Above and at left are two views of the pack now carried by foot soldiers in the American Army. It weighs 02¼ pounds but is carried with minimum fatigue even on long hikes because every item from pack harness to gas mask has been designed with the private's comfort and fighting efficiency in view. This is the regulation field pack now in use during all training maneuvers.

LOADED FOR WORLD WAR Loaded down with a burden like this the soldier of 1918 was sent into the front trenches. Not only was it heavy weighing as much as all the equipment the soldier has today but it was awkward to carry because it was not designed to promote comfort.

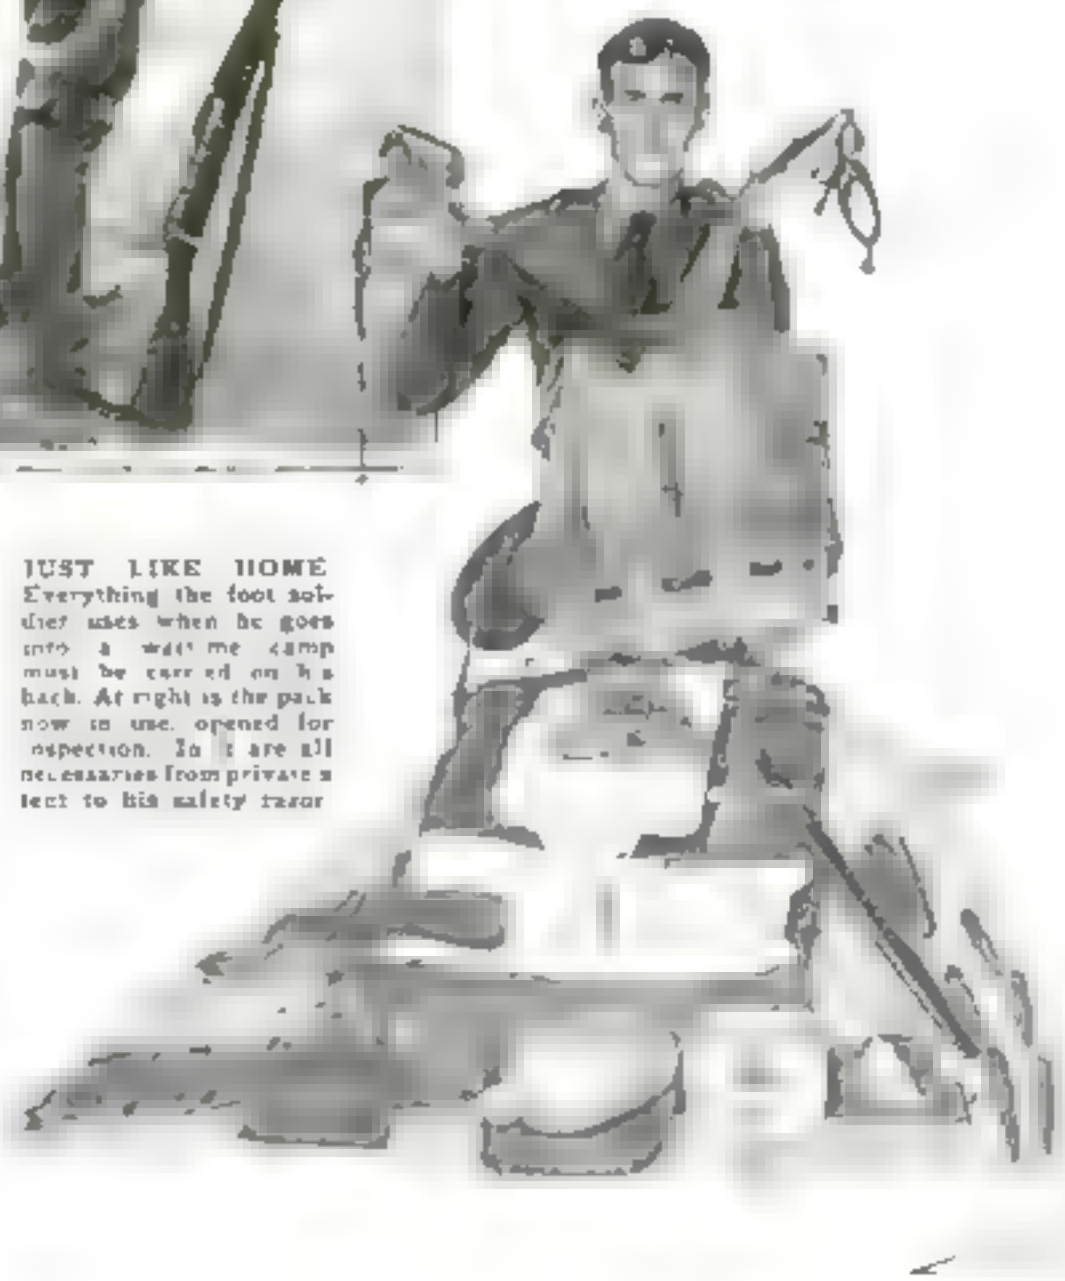

JUST LIKE HOME Everything the foot soldier uses when he goes into a war time camp must be carried on his back. At right is the pack now in use, opened for inspection. In it are all necessaries from private's tent to his safety razor.

Strange Craft at Home on Water or Land

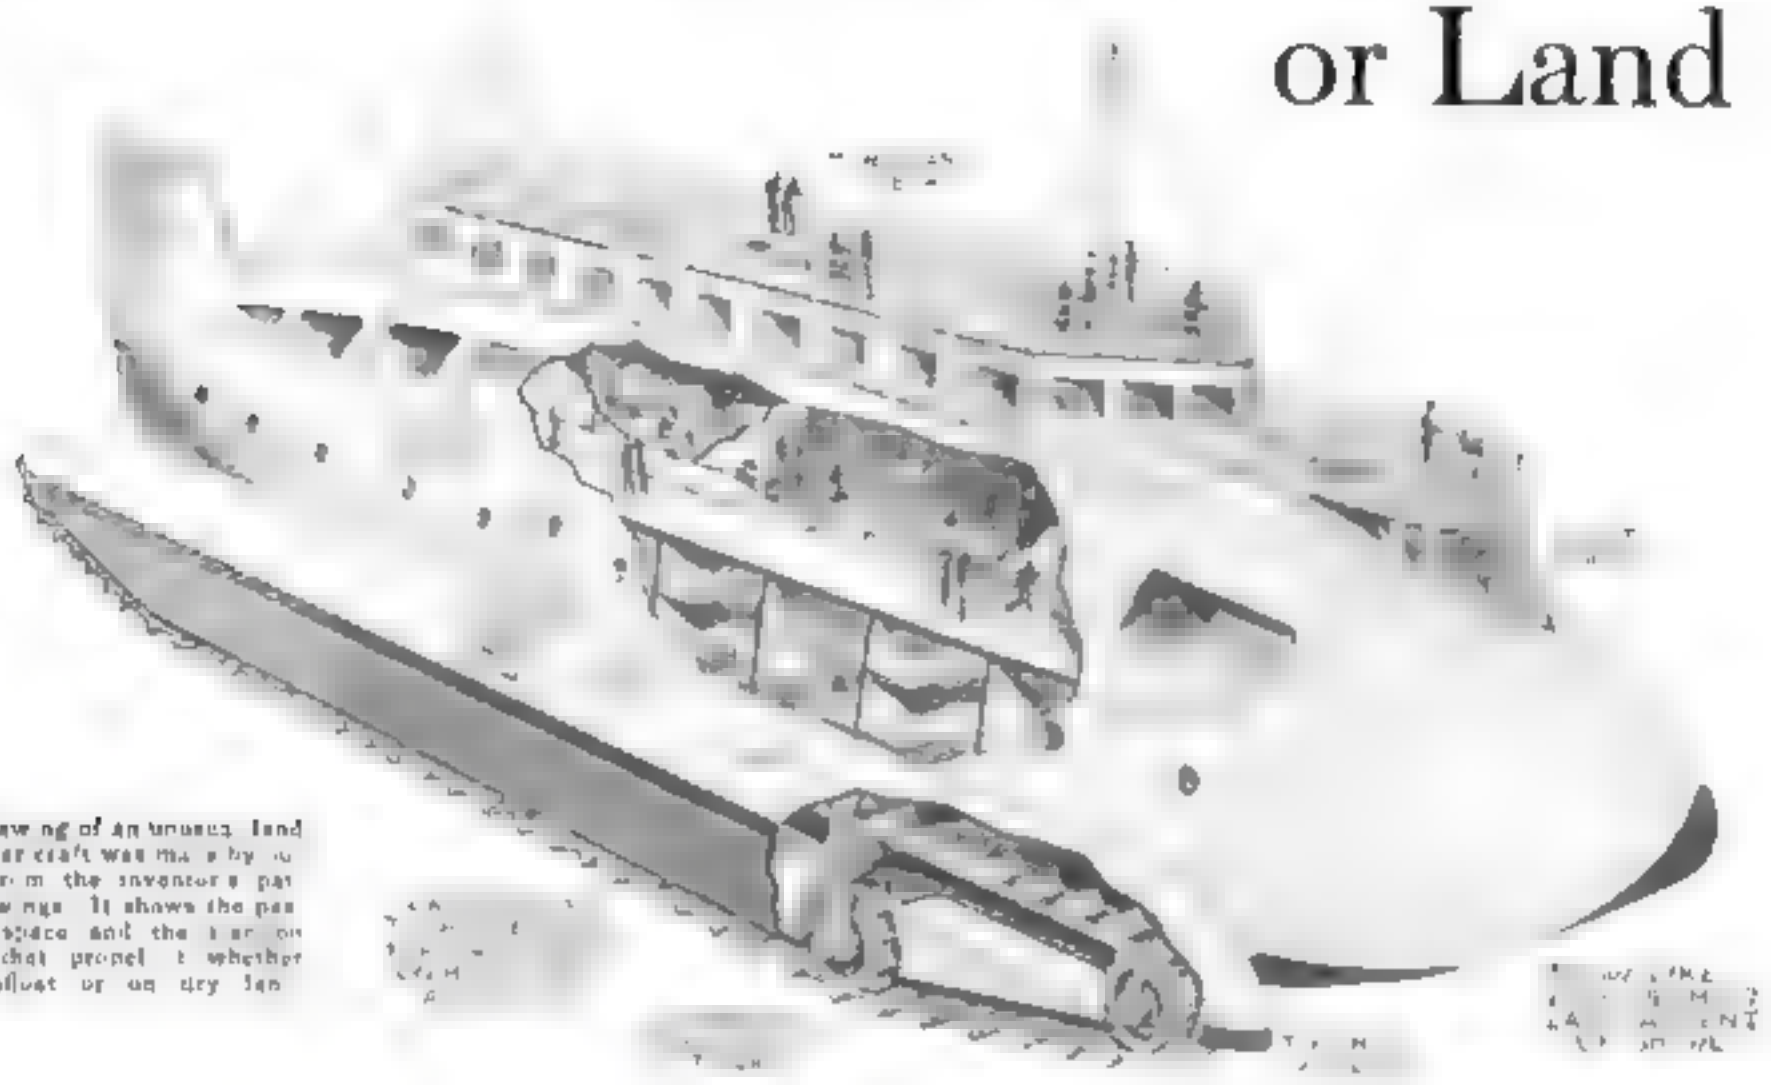

This drawing of an unusual land and water craft was made by an artist from the inventor's patent drawings. It shows the passenger space and the tandem drives that propel it whether afloat or on dry land

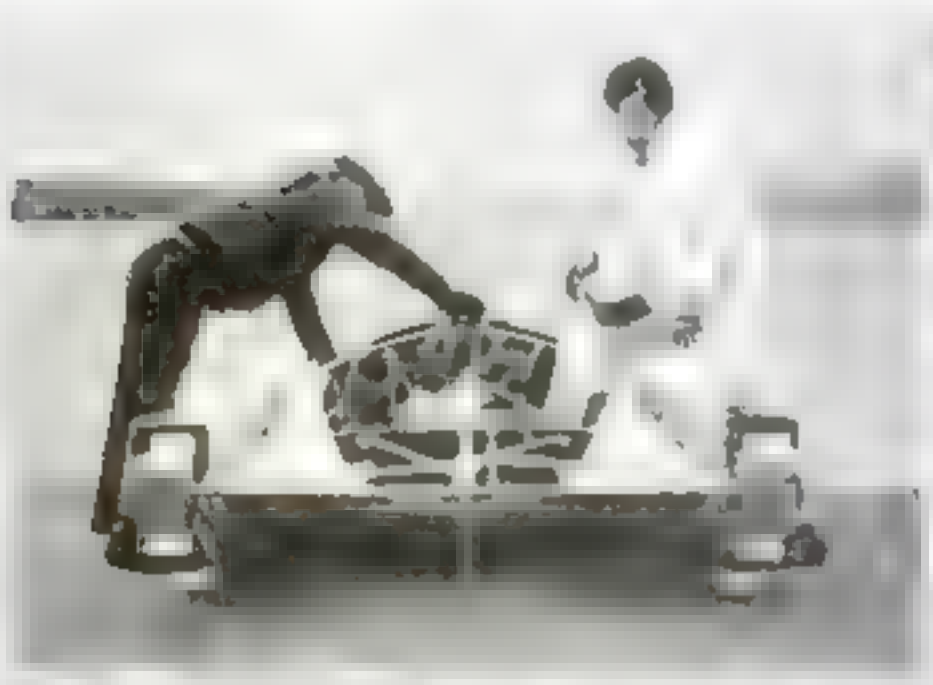

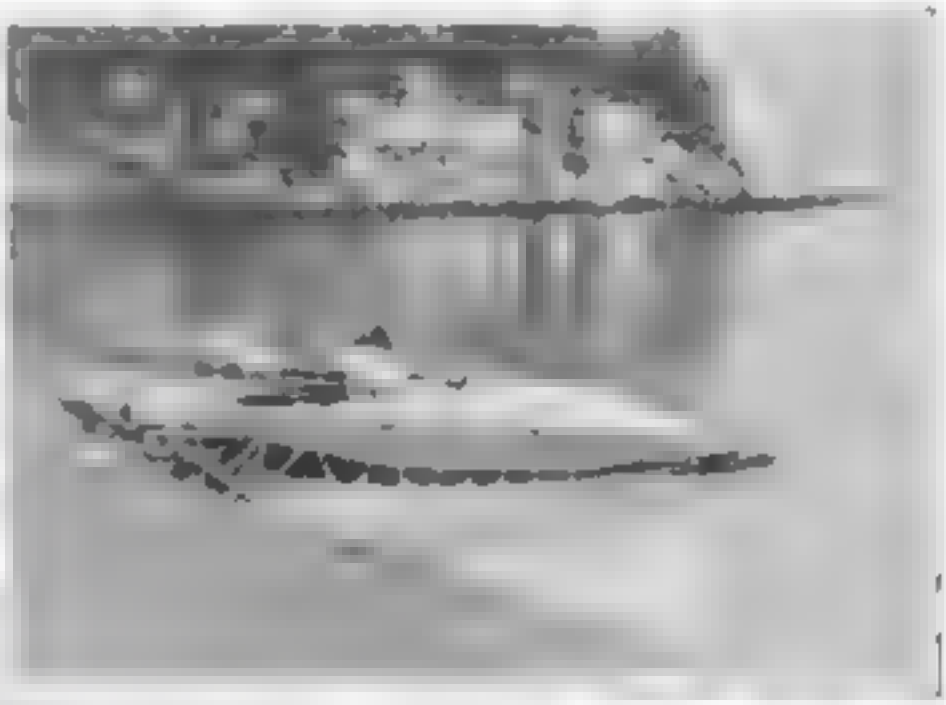

Peter P[illegible] ... way ... to

AN OLD craft recently swept along the Hudson River near Fort Lee, N. J. [illegible] either on water or land. Small paddles on endless belts, running from bow to stern at each side of the boat, propel the odd amphibian in the

On each side the long line of shallow paddles send the water flying as Prell's remarkable craft proves its ability to travel at a fast clip during a serious water test

[illegible] hundred passengers. They would be particularly welcome [illegible] during which they could save time by crawling across the spits of land that form the bends.

MACHINE KEEPS TAB ON WATER SUPPLY

AN IRON watchman who never sleeps keeps track of the depth of water in Washington, D. C., reservoirs. Whenever engineers want to know the level of water they call up this automatic electric indicator, pictured above. A series of buzzes in the receiver constitutes its reply to their question. The buzzes are arranged in code form, indicating the depth of water in the reservoirs.

FREAK OIL WELL SPOUTS IN STREET

STRANGEST of oil wells is the one that burst forth from the middle of an Oklahoma City, Okla., street the other day. Since it gushed without warning, workmen had no time to arrive at the scene with means for controlling it. For days it raged unchecked, only a block from the business district and in an area surrounded by residences.

The uncontrolled geyser of oil, gushing from the ground and filling all gutters for blocks around, constituted a serious fire hazard. Troops of the National Guard patrolled the streets day and night to keep residents of the section from lighting fires in their homes. The scratching of even one match in that neighborhood might have started an appalling fire by igniting the gas and oil held in suspension in the air. Before it was gotten under control the gusher presented a strange spectacle, because it is extremely unusual to see one without the drilling derrick.

Without warning, this oil well spouted in the middle of a street in Oklahoma City, endangering many lives.

TWO ELEVATORS RUN IN ONE SHAFT

LAST MONTH POPULAR SCIENCE MONTHLY described the amazing proposal of a New York electrical engineer, Frank J. Sprague, to run "express" and "local" elevators in the same shaft. Now engineers of the Westinghouse Electric and Manufacturing company, with whom he acted as consultant, announce that they have perfected such a system. What is more, they have actually completed the world's first installation of two elevators in one shaft.

Upper floors are reached by taking the top, or "express" elevator. Beneath it in the same shaft, a "local" elevator serves the lower floors. Block signals like those of a railroad keep the cars at a safe distance from each other. Each operator in the car watches an illuminated panel that flashes a green light when the headway is clear, amber for caution and red when the other car is approached. Automatic safety stops make a collision impossible.



Above, the express elevator in the two-car shaft loaded and ready to start. At right, diagram indicating manner in which the two elevators are operated.

OUTSIDE OF WINDOWS CLEANED FROM INSIDE

WINDOW cleaners may no longer have to hook themselves on window sills at dizzy heights above the sidewalks as they ply their trade on tall office buildings. E. H. Brown, of Los Angeles, Calif., has invented an apparatus that cleans windows from the outside while the cleaner remains within. Besides being safer, the washer does a more thorough job.

A framework, fitting into slots on both sides of the window frame, carries scrubbers and driers that press against the panes. Raising or lowering the sash cleans and dries the pane at one operation. The framework is light and easily portable, so that it can be carried about a building from window to window.

E. H. Brown, of Los Angeles, demonstrates his window washer that cleans from inside.

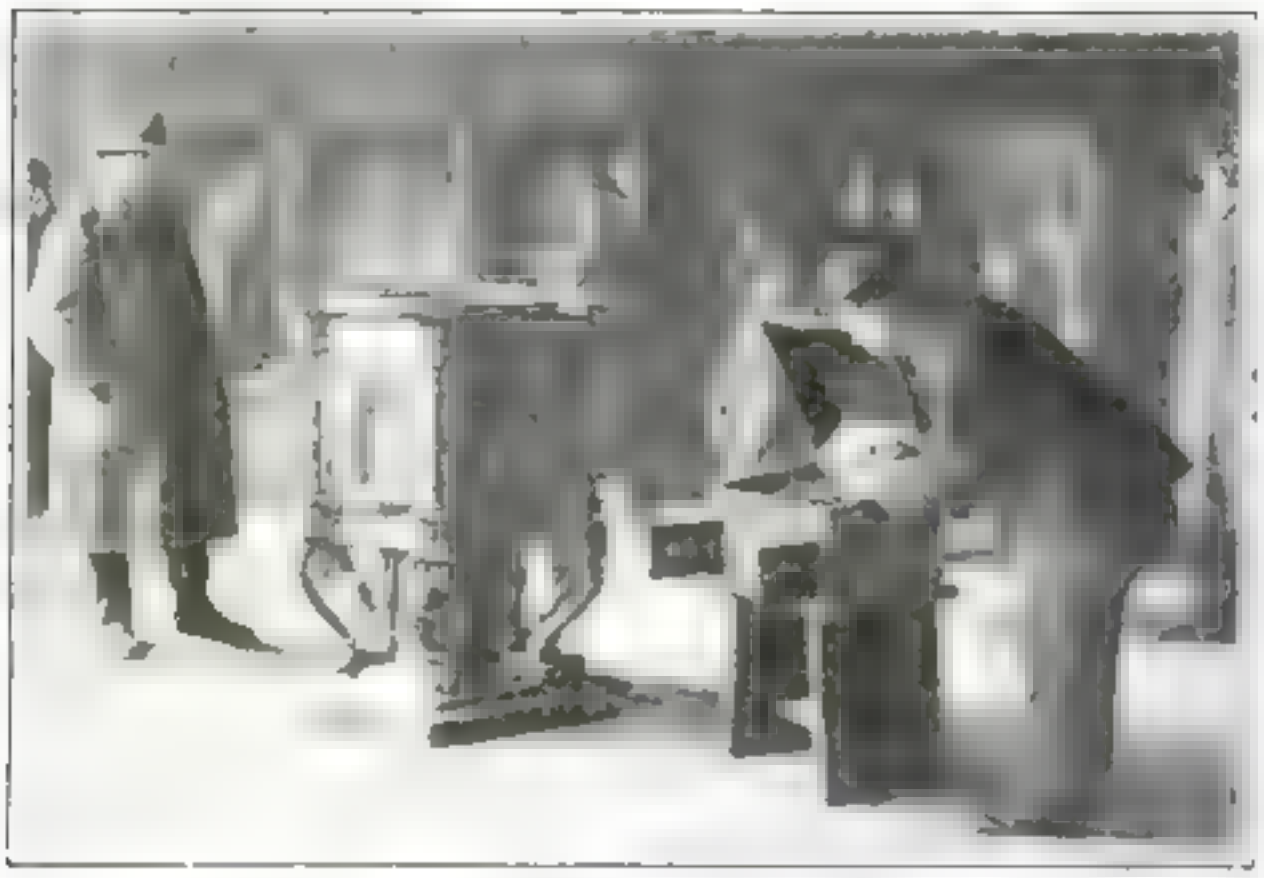

PHONOGRAPH REPLACES GUIDES IN MUSEUM

Visitors to a Berlin, Germany, museum hear the exhibits and displays of unusual interest described by a phonograph, which does away with guides and personally-conducted parties. Thus patrons of the museum no longer have to wait until guides make up parties, but may wander at will through the exhibition rooms.

EDISON PLANS ROCKET TO AID PLANES IN FOG

Thomas A. Edison recently told Lieut Richard Aldworth, director of the Newark N. J., airport, that he had been experimenting with an exploding rocket to help incoming aviators get their altitude in fog Such a rocket would be timed to explode at a fixed altitude of 4,000 feet. It would attract the attention of the airman by its noise, smoke, and light.

MECHANICS' RULE HAS GRADUATED END

A rule developed by a Seneca Falls, N. Y., manufacturer, has graduations on ends and edge Where there is not sufficient room for the rule to be used lengthwise, its short side, graduated in fractions of an inch, gets any measurement up to one and one quarter inches.

HUMMING WIRES WARN OF STORM

Wires strung at right angles to each other were tested recently by electrical apparatus to see if their hum varied with the approach of storm It was found that it did even though a severe disturbance was still

GEAR-SHIFT THROTTLE HELPS AUTO DRIVERS

A motor car throttle operated from the gear-shift lever knob is a new product of a Mansfield, Ohio, firm. Shifting gears and operating the throttle with one hand at the same time leaves both feet free for clutch and brake. This makes starting on hills and driving in heavy traffic easier The device can be quickly applied to a popular make of small car without machine work such as boring or drilling holes

Many new drivers have difficulty in learning how to operate the brake and throttle so that no trouble is experienced in starting a car that has been forced to stop on a steep hill. Minor accidents due to the car rolling backwards into cars behind not infrequently occur in this situation. The gear-shift throttle is designed to remedy this difficulty

CARS FROM BEACH RUN THROUGH BATH

Motorists in Cameron County Texas near the Rio Grande Valley, give their machines a bath when they come from Boca Chica Beach on the Gulf of Mexico onto the new Brownsville Road. A concrete-lined trough 150 feet long placed beside the highway contains about twenty

[illegible] otherwise injure tires or running gear, Upon leaving the bath, which is about seventeen miles from the beach, cars return directly to the pavement

Cars from the Boca Chica Beach, on the Gulf of Mexico, get a chance to wash off the sand and salt they may have picked up, in a 150-foot bath built along the new Brownsville turnpike.

FOLDING POCKET CASE PRESERVES PICTURES

Proud fathers who like to show around the pictures of their babies, and travelers returning with prized photographs of a vacation trip, are prospective users of a handy little pocket case for pictures that has recently appeared on the market. On its hinged leaves of cloth board, which fold together like the side of an accordion, a number of photographs may be mounted in folder form. They are preserved from damage or loss, and kept together so that all may be inspected and passed around at once.

Real estate agents might also use the folder for photographs of property for sale or renting.

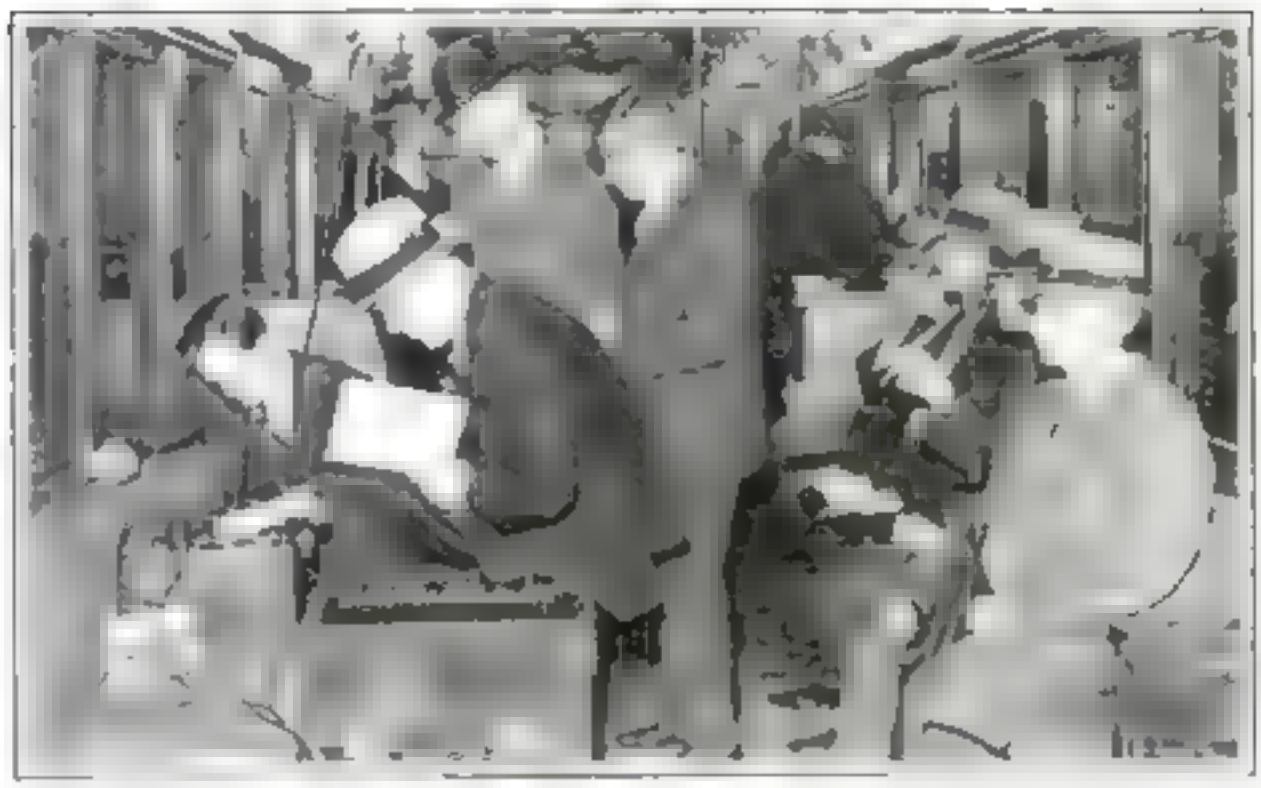

Above, table golf with hazards on its course. At left, the tiny clubs for use on the finger.

TABLE GOLF WITH TINY CLUBS IS NOW HERE

Beyond a doubt the tiniest thing in miniature golf is a new game for the dining room table, recently introduced in Denver, Colo. "Clubs" are thimblelike devices to be slipped upon the index finger. They are made in a variety of shapes in imitation of the driver, brassie, mashie, and other clubs of the standard game.

With these tiny implements, the player propels a ball about the size of a small marble, and as hard as a conventional golf ball. The "course" is made of felt, on which greens, trees, lake basins, and sand traps are arranged in a skillful effort to give the table course the familiar appearance of full sized links. The weight and balance of the clubs in relation to the ball are of as great importance in this new game as in outdoor golf.

Beginners can learn much about regular golf from this game, according to its inventor, Daniel G. Lilley, of Denver.

USE MIKE TO MEASURE NOISE IN SUBWAY

New York subway riders were surprised recently when several young men walked into a car, set up black boxes, and began to jot down figures in notebooks as the train proceeded. The observers of an electrical laboratory were measuring noise made by a subway train. With the aid of their report, the company operating the subway will attempt to remove some of the din from the life of underground travelers.

Picking up noises in the car was a cylindrical microphone like those of radio broadcasting stations, hung from one of the metal "straps" and visible in the photograph behind the hat of the observer with a notebook. Its electrical impulses were conducted through an amplifying box and registered upon numbered dials so that the intensity of noise from moment to moment could be measured and recorded for future refrence.

MOVE GERMAN CROOKS IN PRIVATE CAR

When en route from courthouse to prison, German criminals travel in a railway coach designed for their exclusive use. It is heavily armored and guarded, so there is little chance for a prisoner's friends to effect his release while the car is on the road. Separate "cells" are provided for each prisoner, containing a bed, table, chair, and washstand.

The car really constitutes a moving block of cells in many particulars exactly like those found in modern prisons. Not only is the safety of the prisoner insured by this car, but it has the humane feature of providing the offender with transportation without subjecting him to the curious gaze of fellow travelers. One objection, of course, lies in the fact that it would be expensive to use the car for only one or two prisoners. It is useful, however, in transferring men from one prison to another.

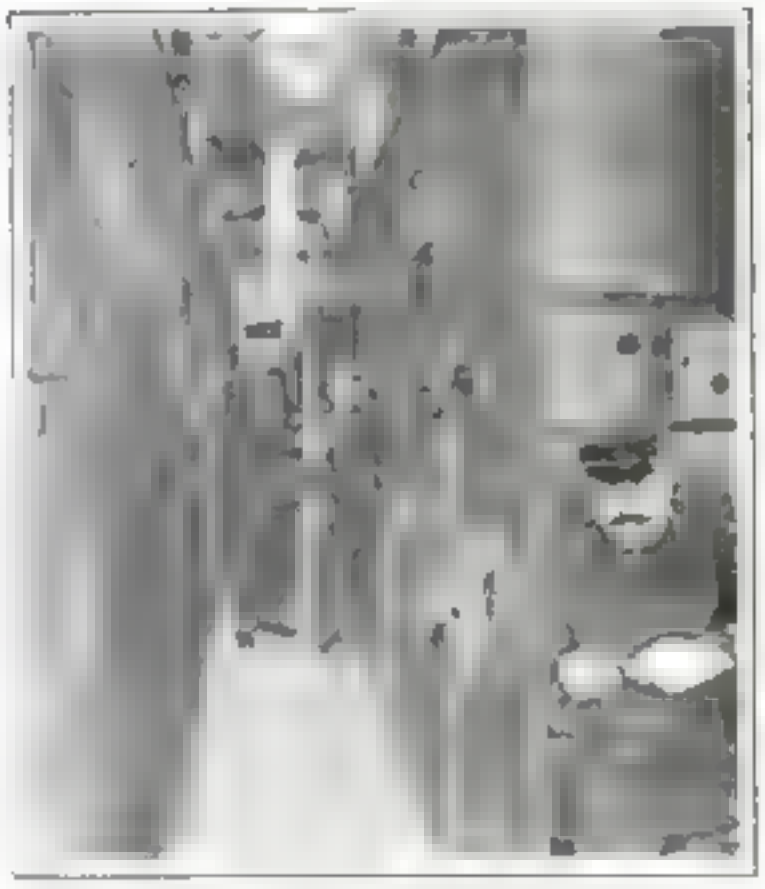

Interior of the private armored car designed in Germany to transport criminals. Each man has a cell to himself, which is furnished with bed, table, chair, and washstand.

NEW OFFICE TELEPHONE HANGS AT DESK'S SIDE

TELEPHONE wires and cords are banished from the desk by a new type phone now obtainable. Thus the top of the desk is kept clear as a working space. The instrument hangs at the side of the desk, where it easily can be reached from the chair and the dial face is toward the user so that numbers and letters are clearly discernible. One hand holds mouthpiece and receiver, leaving one for writing.

Working space on top of office desk is kept free of cords by use of this new type telephone

BOAT PROPELLER'S POWER OIL-TESTED

WHILE all propellers of the same size having the same number of blades may look as much alike as peas in a pod, nevertheless there is a vast difference in their performance. A simple means of selecting the type of propeller that will deliver the greatest power has been devised by an Alameda, Calif., towboat company.

The device consists of a ten-inch wrought steel cylinder with a six-inch bore, in which a piston works against heavy oil when the strain is applied. A bridle is connected to the piston on opposite sides through slots in the cylinder walls. The cylinder is tapped for a gage that registers the pull in pounds.

The efficiency of a boat propeller is tested by this gage in which a piston is driven against oil pressure to show power

AMERICAN WIVES OUTLIVE THEIR HUSBANDS

THE average American woman has six chances out of ten of being left a widow while her husband has but four chances out of ten of being a widower. That is the conclusion of officials of insurance companies whose duty it is to reduce the chances of life to figures. It is explained by the tendency of American men to marry late in life, and choose wives younger than themselves.

MACHINE PASTES AND TRIMS WALL PAPER

A NEW electrically driven machine recently perfected in St. Louis, Mo., shortens the paper hanger's visit. Any standard-sized roll of wall paper placed in this machine passes through rollers which automatically cover it with paste, trim the edges, and deliver it ready to be placed on the wall without waste of time.

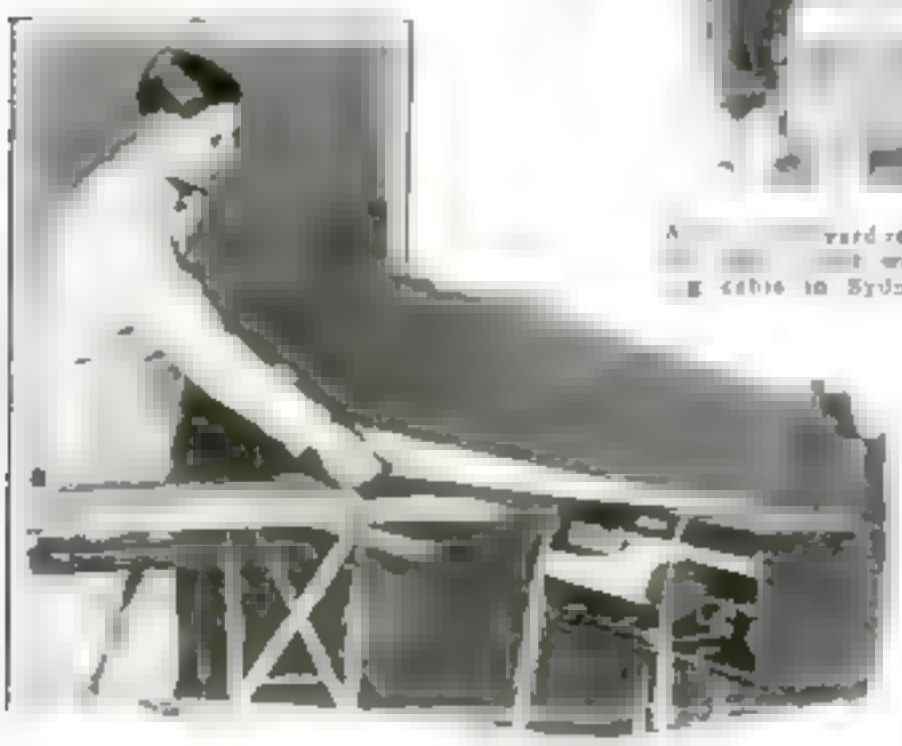

Muss and waste of spattered paste in paper hanging is done away with by the use of this machine, which trims and pastes the wall paper

LIGHTS ON POLE AID LAYING OF CABLE

AN ILLUMINATED pole on a barge recently aided in laying a large electric cable at night in the harbor of Sydney, Australia. Electric lights placed at one-foot intervals on the pole made it visible to a surveyor on shore. Sighting through his instruments at it he was able to plot the position of the cable on the harbor bottom. It is necessary to know the exact location of harbor cables so ships will not drop their anchors on them. The pole is seen at the far side of photo at the left.

The unusual engineering feat was performed at night so there would be no interference with shipping. The cable was laid from a barge towed by three tugs. One was lashed on either side and steered it. The other went ahead and set the course. The cable was shipped from England in five reels, each of which contained seven hundred yards of cable and weighed twenty-five tons.

A [illegible]-yard reel of cable, [illegible] workers lay[illegible] cable in Sydney harbor

AIR RESISTANCE OF CLOTH NOW TESTED

Underwear will be healthier and outer garments warmer when textile mills adopt an instrument recently developed by the U. S. Bureau of Standards for determining the air resistance of fabrics. Originally, this machine, a short, fat tube with a blower on one end and a flexible fabric holder on the other, was designed to test the air permeability of parachute fabrics.

Dr. William D. Appel, chief of the textile division of the Bureau, says that this new device has two important points of superiority over others of like design. First, it is portable and may be moved readily from one department of a mill to another. Second, it draws air through fabrics to be tested instead of pushing it through, thus affording tests with air of a predetermined density and temperature.

Since the air is not first put through the fan, it passes through the fabric at whatever temperature and density may be desired. The machine can be used to test cloth in a refrigerator or in a heated room, the temperature in either case being known. Exact air pressures are determined by the use of a set of nine orifices which are interchangeable. The fabric is held in the air stream under slight tension, the variation in this tension being recorded on scales and indicating the resistance of the cloth sample to the flow of air.

In the accompanying illustration, D. A. Jessup, of the textile division, is shown preparing a piece of fabric for test in the new machine.

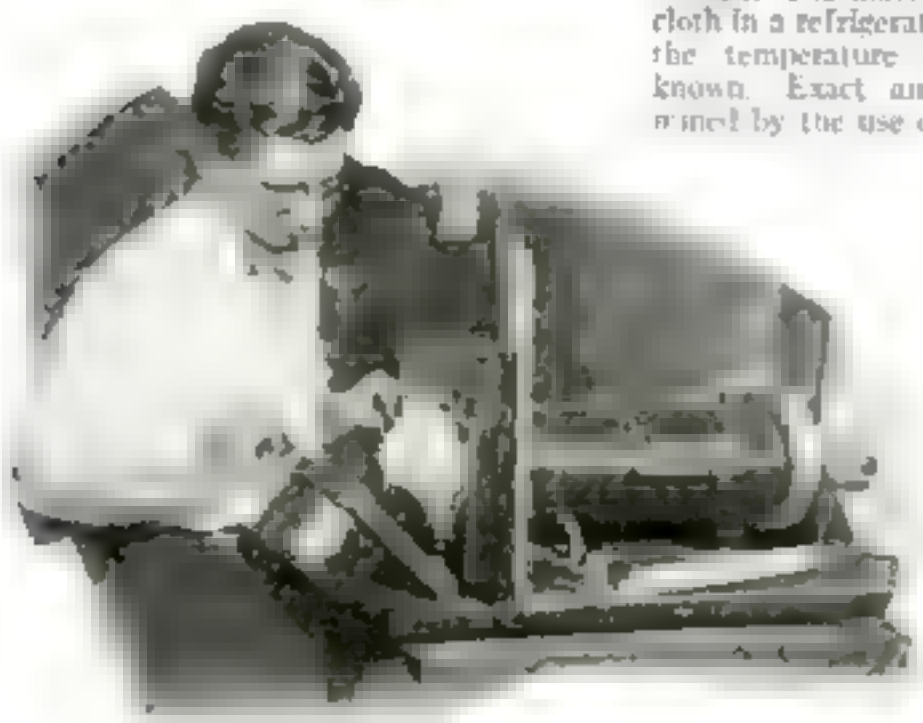

D. A. Jessup of the U. S. Bureau of Standards is preparing a piece of cloth to test its resistance to air with the Bureau's new machine

BOY BUILDS ROBOT THAT OBEYS HIS VOICE

Bobby Lamuert, thirteen-year-old inventor, has constructed a mechanical "man" in a little home workshop near Charlotte, N. C. He named the creature "Bugs" in honor of his dog. At the word of command, spoken through a dial telephone, Bugs raises his arm.

"Stop," cries his youthful master, and the action ceases.

Bobby says that Bugs is only a toy that can merely talk and shake hands. He is, however, experimenting with a system of light rays by means of which Bugs can be more fully controlled.

NEW ZEALAND RIVER IS ELECTRICALLY CHARGED

Horses near a power plant in Christchurch, New Zealand, refused to drink from a near-by river. Investigation showed that an electric line had been grounded on a pipe leading from the river with the result that the water had become charged with electricity.

EMERGENCY SEWING KIT

This emergency sewing kit, for a business girl's bag or a traveler's luggage, closes like a small pocketbook. It contains all the materials for rapid mending—thimble, pins, needles, and thread.

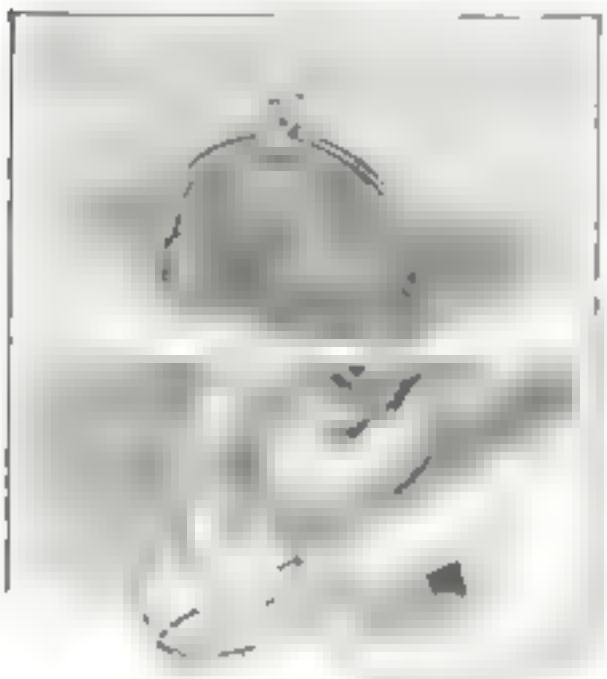

Emergency sewing is provided for with this bag which contains thimble, needles, thread

ELECTRIC RAILWAY SPANS WIDE CANYON

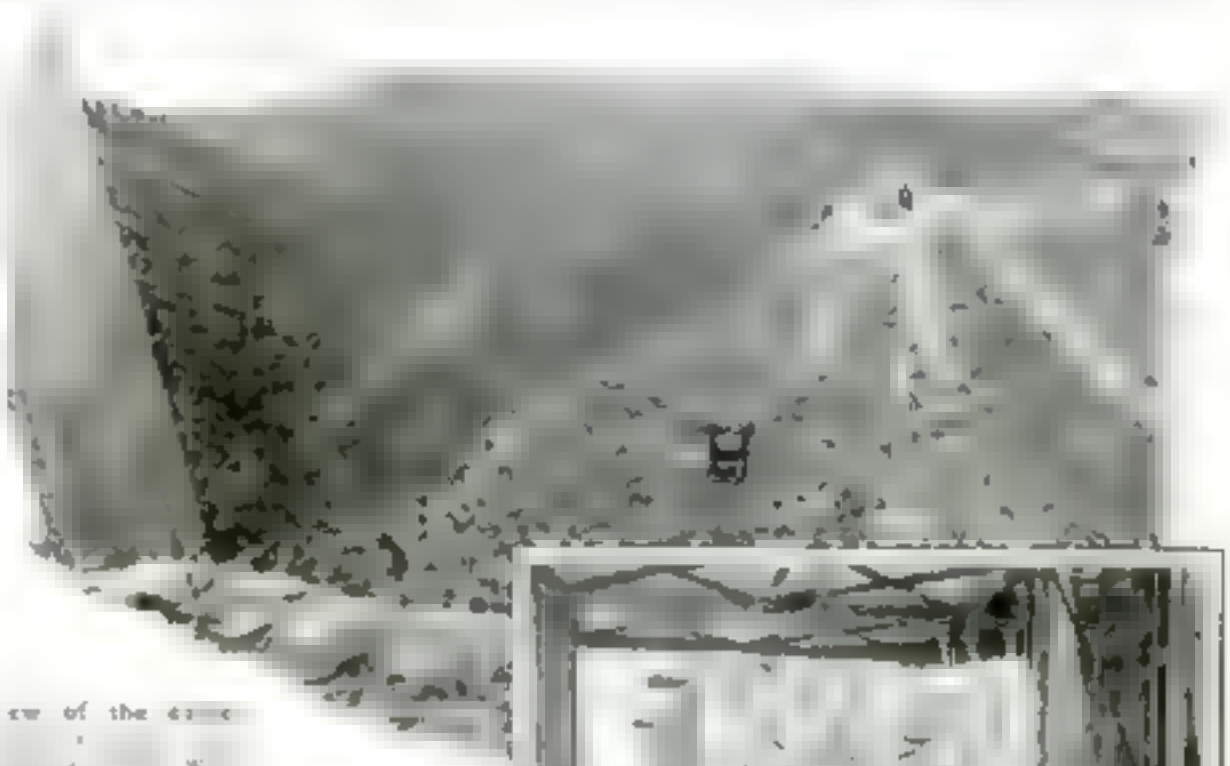

View of the [illegible]

A half-mile electric railway in Mexico is the largest one of its kind in America. It was constructed by engineers of a Western [illegible] as a means of hauling between their [illegible] camps. A power car loaded at the [illegible] carries hung [illegible] cables and crosses the chasm at twenty miles an hour. The aerial tramway has proved a speedy and economical means of transporting lumber across the deep gorge.

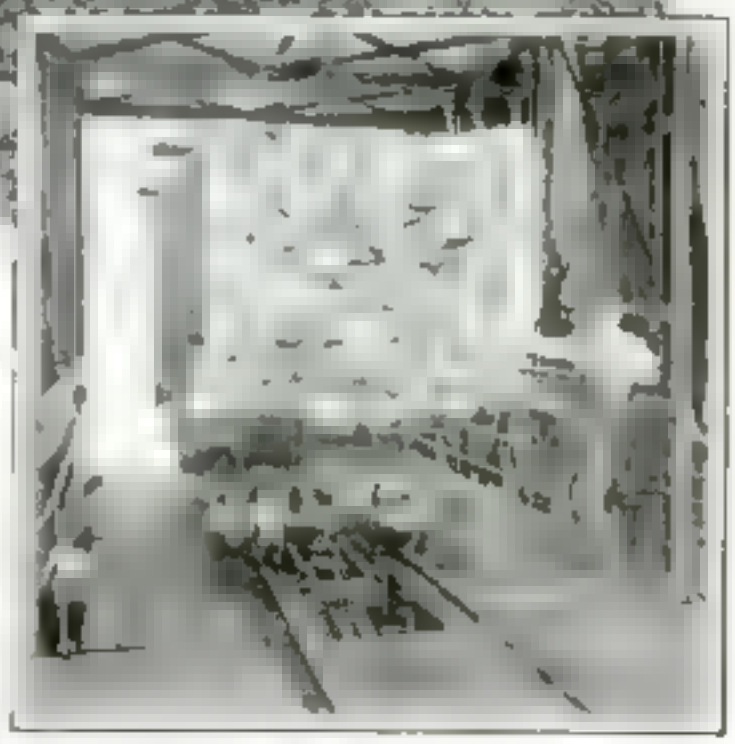

Car loaded with lumber is ready to start on its trip across canyon on America's largest mid-air railway.

Rear view of house built for himself by Paul H. Harbach, Buffalo, N. Y., architect, who has original ideas as to how a building should be placed on its site. In this case the front of the home faces away from the street, upon which the rear of the house and

The Architect Builds His Own Home—A Series

Don't Let Rules Mar Your House

By PAUL H. HARBACH

REGARDLESS of the dollars involved, it is undoubtedly a great satisfaction to an architect to design his own dwelling. In doing this his mind enjoys a freedom rarely experienced in making designs and supervising work for clients. Momentarily it offers an opportunity for retreat, if not escape, from the conventional and commonplace qualities that so often characterize the lay mind in its home-building thoughts.

American home-building is still overshadowed and hampered, in my opinion, by the front porch precedents. Without regard to any other consideration, the porch and the chief rooms of the house are too often placed nearest the street. At its worst this has a showcase or goldfish-bowl aspect sometimes approaching the ridiculous.

I believe that a home should be placed upon a site and the location of the various rooms determined without letting proximity to the nearest thoroughfare seriously influence one's decision. In designing a home for my family, it happens that the garage and the rear of the house are nearest the street.

Before going further along this line let us take up the question of selecting a site. In my case I wanted a location that would be far enough in the country to insure fresh air, yet easily accessible to the down-

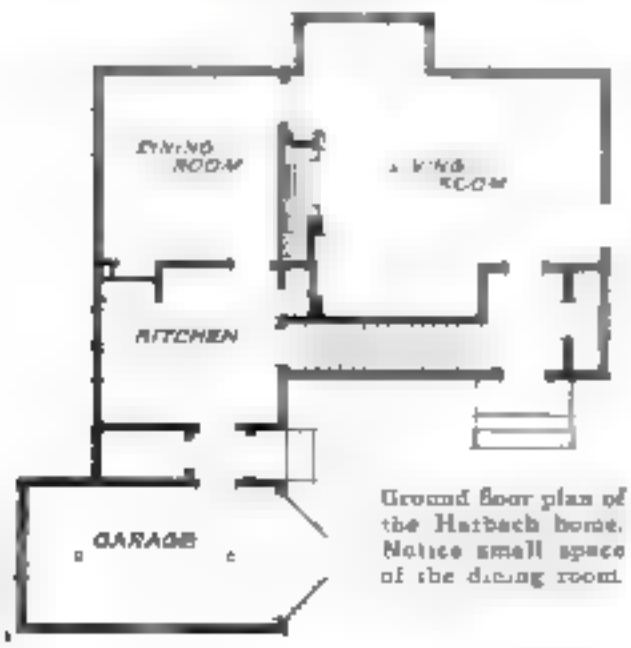

Ground floor plan of the Harbach home. Notice small space of the dining room.

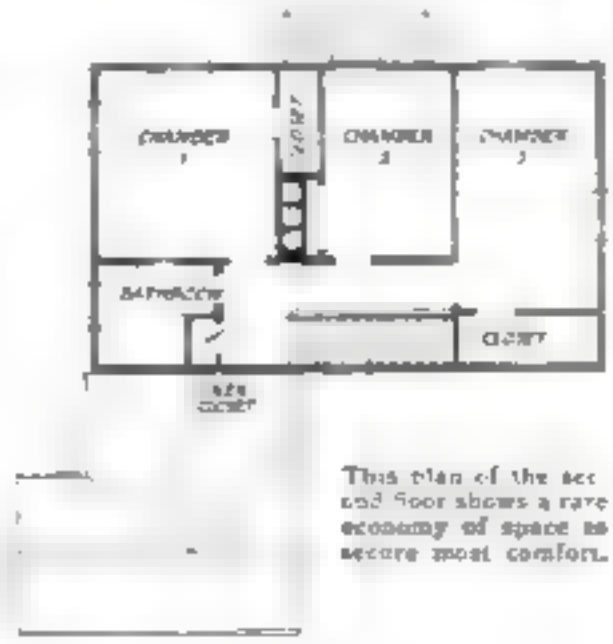

This plan of the second floor shows a rare economy of space to secure most comfort.

The panels in the main door, which is of white pine, are cut to represent a series of chevrons.

town section of Buffalo, N. Y., where I have my office. Also I wanted one that would have some beauty of topography.

Finally I decided upon a site six miles from Buffalo's city line and twenty-five minutes drive from downtown Buffalo. The lot had a 100-foot frontage on the street and a depth of 350 feet.

The lot line at the street ran almost exactly east and west, with the street as the northern boundary. From the street,

The living room is the heart of the Harbach home, and this view of its canopy corner suggests the way in which this idea was carried out

This view of the dining room shows the effect of the early American period which dominates the interior of the house.

The bathroom has tiled floor but painted walls so that the color scheme can be changed at will.

the lot sloped down gently and at the rear there was a tangle of wild apple trees and shrubbery ending on the bank of a shallow pond

The property had been part of a farm the owners of which were Quakers who set up several restrictions in the deed for the protection of future home owners

FOR example, there is a restriction forbidding the construction of house or garage within fifteen feet of either side line of the property or within seventy-five feet of the highway. Single residences only could be constructed. Drilling for gas and oil upon these lots was forbidden to prevent the erection of unsightly well equipment in a neighborhood of home lovers. There is also a clause setting a minimum figure for the cost of the house to be erected

We wanted to build a house that would be Spartan in its simplicity, but adequate to our needs. Exclusive of the site, we kept the cost within $11,000. In placing the garage on the side facing the street, we reversed the usual order of things, but we wished to make the most of the splendid view toward the rear of the lot. The house is twenty feet by thirty-three feet and the attached garage is ten by eighteen feet

THE dining room was placed in the southeast corner where the year round it would get the sun during the morning hours. The living room was placed in the south and west end of the house, with a porch on the west end, open toward the south but latticed and now covered with a climbing American Beauty rosebush on the north and west sides. The dining room was made as small as possible, because it is used at most not more than three hours a day, and hence there is no reason for [illegible] that can be used to better advantage elsewhere on the

The kitchen in the northeast corner of the house, has a service entrance through a sort of recess in the connecting portion of the structure between the house and the garage. At the right of this recess are small doors, one opening into a milk box and the second, somewhat larger, opening upon a space for other deliveries. Natural light for the kitchen comes from the east One may go from the kitchen into the garage through the connecting hallway without going outside. In this hall is placed the first-floor lavatory

The garage doors, which swing out, are on the west end. A few feet away, on the north side of the house near the west corner, is the main entrance This entrance-way is of narrow clapboards, laid four inches to the weather, painted white. It is derived from an effective one found in an old Dutch farmhouse on Long Island. To the left of it is a bracket bearing a copy of an old English stage lamp of the early eighteenth century

The door, framed with glass above it in four square lights, is of solid white pine painted a bluish green as are also the window shutters. The door is divided in half in the Dutch manner and in each half there are two sets of vertical panels, so cut that they present a series of chevrons in each panel.

(Continued on page 146)

Here is a view of the front of the house with its many windows looking out upon a southern exposure which, with shrubbery and flowers, has been made attractive

New Conveniences for the Home

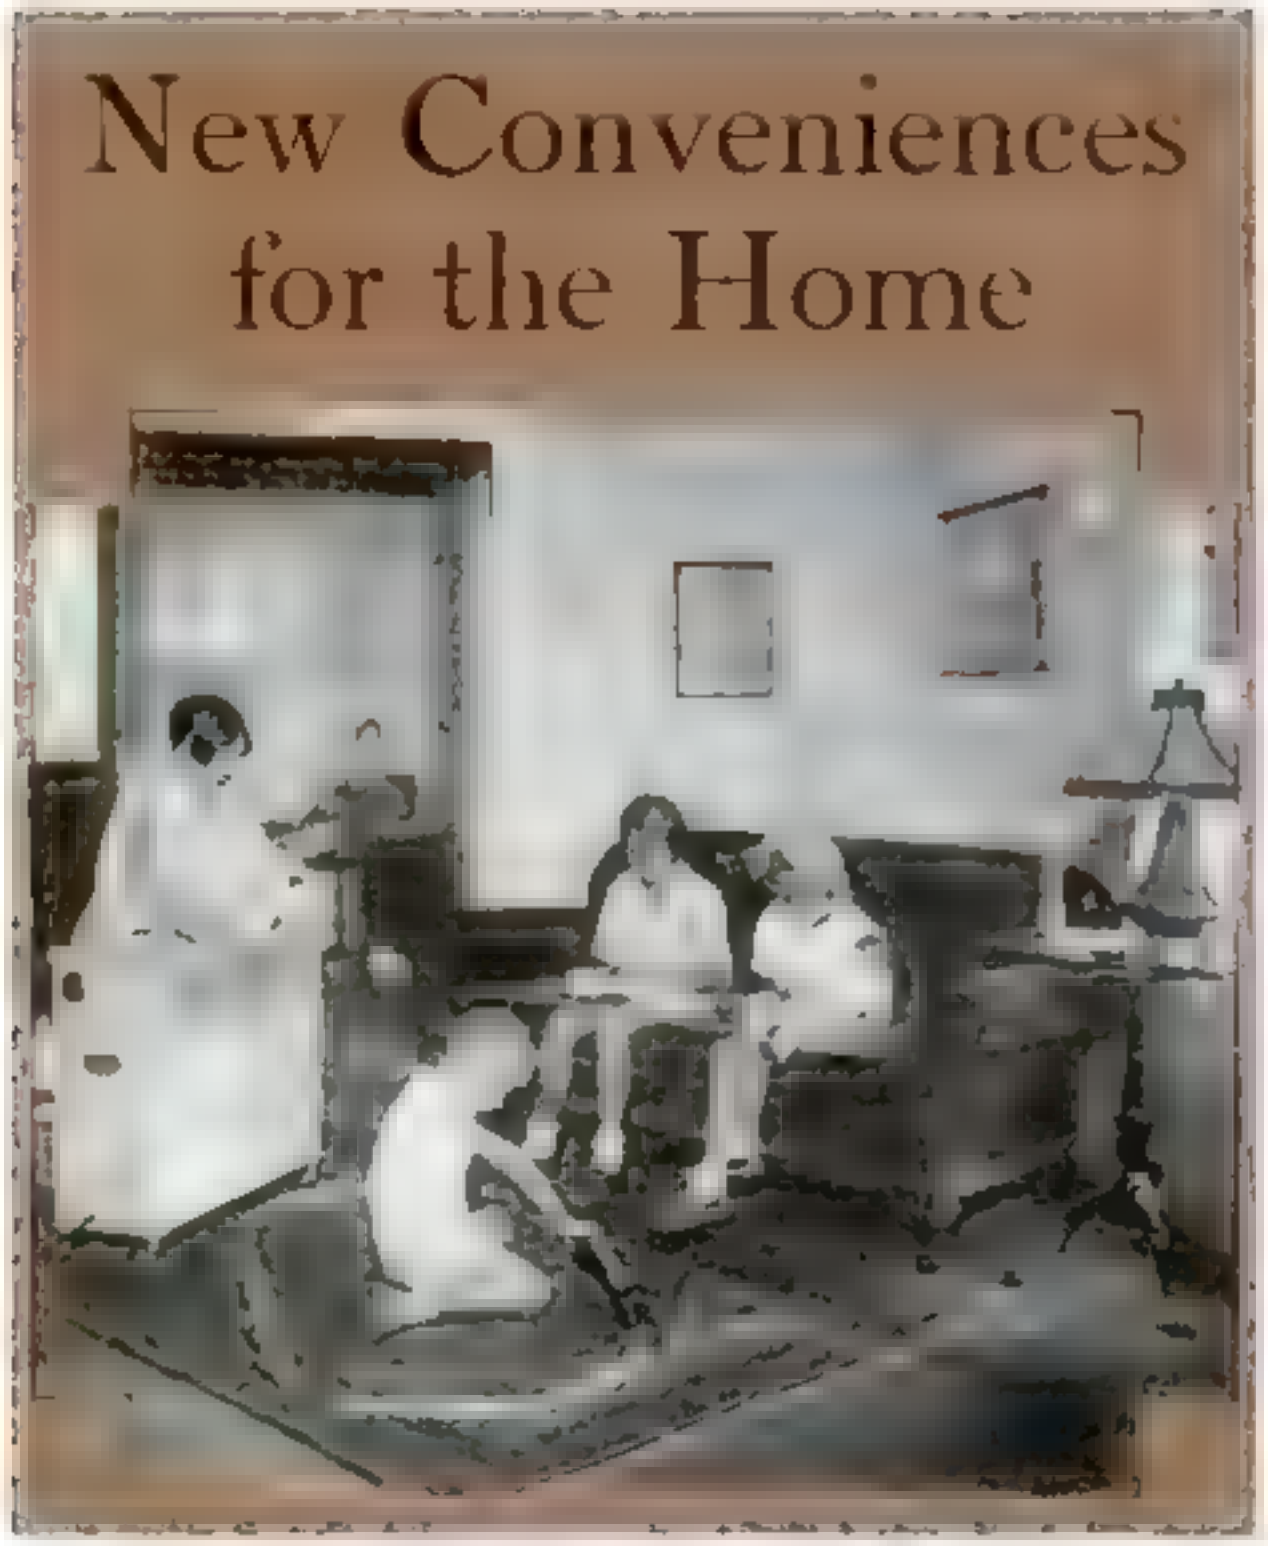

ELECTRIC RADIATOR ON ROLLERS. This portable heating plant is really a steam radiator in which the water is heated with electricity. As the unit is on wheels it can be run into any part of the house where more heat is needed, as pictured above, and plugged into a wall socket. Steam is quickly generated in its tiny boiler and the attractive cabinet design and casing directs the warm air outward.

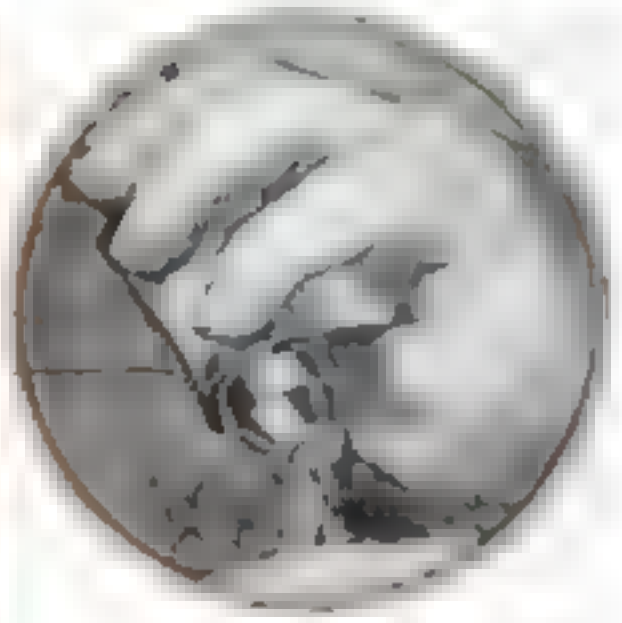

SALT FLOWS FROM THIS SHAKER Humid weather clogs the average salt shaker so nothing gets out. A cone shaped stopper helps keep dampness out of the shaker Inverted, it slides out and lets salt escape.

WATCH YOUR WEIGHT This piece of furniture is not only a comfortable stool but also a scale that weighs you whenever you sit on it.

SAVES FROZEN PIPES A British inventor has designed the safety valve below to guard pipes from bursting when the water freezes in them, by providing expansion room

TAKE UP THAT SLACK Clotheslines have no chance to sag and drag clothes in the dirt if this ingenious metal link shown above, is used to fasten the ends together. A moment's adjustment will remove any slack in the line and hold it firm and taut. There is no necessity for tying knots and the device once in place cannot slip under strain of heavy clothes.

LIGHT WHERE YOU'RE LOOKING. A glass lens in the shade of this reading or sewing lamp directs the beam of light at the exact spot you want brilliantly illuminated.

COLOR IT YOURSELF

A HANDY SERVANT

CONVENIENT REFRIGERATOR

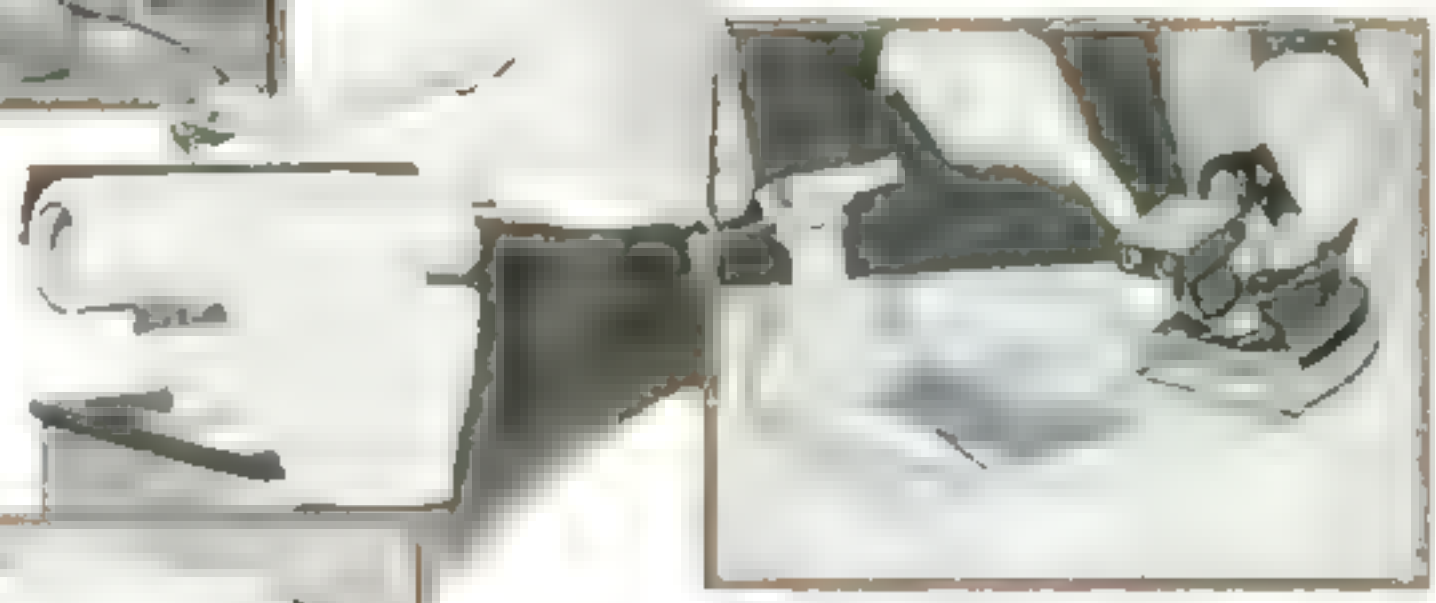

NEW TRICKS FOR OLD

WASH OR DRY CLEAN

POPULAR SCIENCE MONTHLY

RAYMOND J. BROWN, *Editor*
ARTHUR WAKELING, Home Workshop Editor
ALFRED P. LANE, Technical Editor
ISRAEL DOSKOW, Art Editor

Published Monthly by Popular Science Publishing Company Inc., 381 Fourth Avenue, New York City. Single Copies Twenty-five Cents. In the United States and Its Possessions and in Canada, $3.00 the Year. In All Other Countries $3.00 the Year.

The Truth Yesterday, Today, and Tomorrow

MR. L. S. HALL of Wilmington, Mass. sends us a page advertisement clipped from an old magazine in his files. Set in old-fashioned type and decorated in the manner of a bygone era, it reads as follows.

"POPULAR SCIENCE MONTHLY for 1886 will continue, as heretofore, to supply its readers with the results of the latest investigation and the most valuable thought in the various departments of scientific inquiry.

"Leaving the dry and technical details of science, which are of chief concern to specialists, to the journals devoted to them, the MONTHLY deals with those more general and practical subjects which are of the greatest interest and importance to the public at large. In this work it has achieved a foremost position, and is now the acknowledged organ of progressive scientific ideas in this country."

Merely by changing the date these paragraphs could be used to advertise POPULAR SCIENCE MONTHLY of today for the statements therein are true now as they were true forty-five years ago.

Of course POPULAR SCIENCE MONTHLY now is bigger, better, and far more interesting than it was in 1886, but it has, nevertheless, held fast to its original ideals.

Stop the Fool Drivers

EVEN in the early days of motoring, when autos whizzed along at eight miles an hour, and a motor trip was a grand success if the vehicle got home under its own power, there were fatal accidents.

And how the newspapers of that period did welcome every such accident! Invariably they wound up their stories with tirades against the automobile, calling it a menace to civilization—a terrible "Car of Juggernaut" crushing luckless citizens under its wheels.

We wonder what some of these old-timers would say could they look over our shoulder to read a report from the National Safety Council now on our desk. Last year, so the report reads, 32,500 unfortunate citizens were ushered into the hereafter under the wheels of automobiles.

That is equivalent to wiping out the entire population of Lewiston, Me., or Moline, Ill., or Montclair, N. J.

Sad as it is to contemplate such an enormous death list, the most alarming feature of the report is that the number of people killed in 1950 was four percent greater than the number killed in 1929, yet the number of automobiles in use increased by only one percent.

Back of every accident is a record of human failure or misdoing. Even when the primary cause of an accident is a mechanical breakdown, some human is, at least technically, to blame for not knowing the machine would break under a given set of conditions.

There is just one bright spot in this auto accident report. While the country as a whole showed an increase of four percent in the number of accidents, ten states, with relatively strict driver's license requirements, showed an average *decrease* of one and one half percent. States without driver's license laws showed an *increase* of more than eight percent!

The key to the solution of the auto accident problem, we believe, lies in these figures. In the last analysis, the thing that controls the accident rate is the competence and common sense of the man behind the wheel.

What we need in every state are stricter and more intelligent driver's license laws, better facilities for tests and inspections, better inspectors and, above all, the total elimination of the crook in inspector's garb who passes incompetents for a five or ten dollar bill.

It may be a hardship on the unskillful and temperamentally unfit to deprive them of the privilege of driving—but what a blessing it would be to everyone else!

Little Cameras and Big Pictures

WHEN you take a picture with your camera, the resulting negative consists of an image formed in a thin film of gelatin by millions of tiny grains of metallic silver. The darker portions of the negative which produce the whiter parts of the print have more silver grains than the lighter portions of the negative which form the shadows in the print or enlargement.

What appear to you to be sharp lines in the negative image actually are fuzzy rows of silver grains when viewed under a microscope. That is why it is impossible to get a really sharp enlargement more than a few diameters bigger than the original negative.

The grainy construction of the image also explains why home movie film never gives as clear a picture as you see in your favorite movie house, which uses wider film and why commercial photographs are taken on such large size negatives.

Photographic chemical experts have long sought to find some way to reduce the size of the silver grains so as to get better detail.

Now along comes Dr. Miller Reese Hutchison, who was for years chief engineer for Thomas A. Edison, with a claim that he has solved the problem that has baffled the experts for so many years.

By treating the negative after exposure and before development with a secret solution, Dr. Hutchison says that the size of the grains is reduced to such an extent that sharp enlargements two feet wide can be made from a negative measuring only half an inch.

Dr. Hutchison seems to be chiefly interested in obtaining a finer grain so as to get a better sound track on motion picture film. This would of course be of great importance. But if in actual practice his process lives up to his claims, it will do more than give us better talkies. It will revolutionize the whole art of photography. Every big camera in the country will become obsolete. Commercial pictures will be taken on plates or films only an inch or two wide. Pocket cameras may become no bigger than walnuts and a home movie camera giving good results, may use film no wider than a shoe string.

Let's All Be Morons

TWENTY percent of the people in the United States are morons, according to Arland D. Weeks, Dean of the School of Education of North Dakota Agricultural College. This is merely an estimate. Obviously the Dean hasn't examined everybody in the country, but from the data at hand he makes his guess. A moron is an adult who has remained, mentally, at the age of twelve or fourteen. But children are notoriously happy. Does this apply to the moron? If so these children of a larger growth may reasonably arouse your envy. On the other hand, has science reached a point where it can accurately gage the mind or is there something subtle and illusive in even the "dull," the subnormal, against which the Dean's yardstick cannot infallibly be laid?

Winners in January "What's Wrong?" *Contest*

FIRST PRIZE 500 DOLLARS
W. V. Chambers, Swarthmore, Pa.

SECOND PRIZE 100 DOLLARS
Leone Goodman, Madison, Wis.

THIRD PRIZE 50 DOLLARS
Fred W. Pickell, Grand Rapids, Mich.

TEN PRIZES OF TEN DOLLARS EACH

S. R. Bachtel, Pittsburgh, Pa.
E. Katskee, Lincoln, Nebr.
W. E. Lang, St. Louis, Mo.
R. F. Lindow, Milwaukee, Wis.
Gail Miller, Christiansburg, Ohio
Marion C. Milton, Galveston, Texas
E. F. Longwell, Brooklyn, N. Y.
Herbert Muench, St. Louis, Mo.
L. H. Roemer, Norwood, Cincinnati, Ohio
Frederick A. Smith, Philadelphia, Pa.

FIFTY PRIZES OF FIVE DOLLARS EACH

Matt Aho, Winton, Minn.
Edward S. Aten, Suffield, Conn.
John Aunquist, Chicago, Ill.
Richard R. Almy, North Providence, R. I.
J. Anthoney, Pasadena, Calif.
Norman W. Ashlock, Columbia, Mo.
Elmer B. Benson, Rock Island, Ill.
Orville N. Bonnett, Martinez, Calif.
C. A. Bucknam, Brunswick, Maine
F. A. Bussey, Denver, Colo.
Ralph C. Butler, San Diego, Calif.
E. T. Campbell, Elmira, Ont.
Mr. and Mrs. J. F. Chandler, Curtiss, Pa.
George L. Clare, Chicago, Ill.
Earl H. Corser, Derby Line, Vt.
Daniel Eadie, Morristown, N. J.
Esther W. Farrow, Oak Park, Ill.
J. Ralph Fenton, New Castle, Pa.
Donald L. Hague, Oradell, N. J.
Lena M. Harding, Wildwood, N. J.
Frank K. Helm, Syracuse, N. Y.
Alfonso Herrog, Santiago, Chile
M. H. Hoarovd, Steubenville, Ohio
Harold L. Johnson, Shavertown, Pa.
M. S. Jones, Royal Oak, Mich.
Mrs. E. P. Lange, Springfield, Mass.
H. H. Loudon, Denton, Tex.
Walter H. Long, Baltimore, Md.
Berchard Mathews, Jermyn, Pa.
Anson R. McConnell, Steubenville, Ohio
Charles E. Milbury, Long Beach, Calif.
Daniel A. Montstream, Hartford, Conn.
Herbert M. Moody, Wytheville, Va.
Larry Moore, Erie, Pa.
H. E. Murdock, Bozeman, Mont.
M. E. Nickols, Frankfort, Ind.
F. S. Olmsted, East Hartford, Conn.
M. B. Parsons, Berkeley, Calif.
W. Penhaska, Carney, Mich.
Royden E. Reed, Manchester, N. H.
William F. Schlesinger, Philadelphia, Pa.
Peter A. Schweitzer, McKeesport, Pa.
R. I. Shuet, Hazleton, Iowa
Mrs. L. M. Shreve, Farmville, Va.
F. Harold Smoker, Columbia, Pa.
C. H. Spicer, Auburn, N. Y.
Emery Stoops, Sublette, Kansas
H. C. Stroeher, Casper, Wyo.
S. D. Sweetack, Chicago, Ill.
Robert Warfield, Manor, Pa.

COLLECTS DUST OF SHOOTING STARS

MANY of the tiny particles of dust that float in the air come from no factory chimney or industrial city. They fall from shooting stars. Thousands of these heavenly visitors, though they fail to reach the earth, sprinkle it none the less with their fragments every day.

Unique among astronomical pursuits is that of Lucien Rudaux, noted French astronomer at the Observatory of Donville on the French shore of the English Channel. For years he has been collecting this "star dust" and he recently declared that its origin outside the earth is now proved.

At Donville, this scientist collects the microscopic fragments as they settle from the air in a box resembling a weather observer's rain gage. They are recovered even more easily from mountain snow in the Pyrenees, in the south of France, where observers collect the particles for him.

When the pure snow begins to melt, a grayish coating—the dust of meteors—becomes visible on its surface. An observer collects this dust by running a quantity of the melted snow through a porous filter paper, the dust remaining on the paper.

Examined under a [illegible]

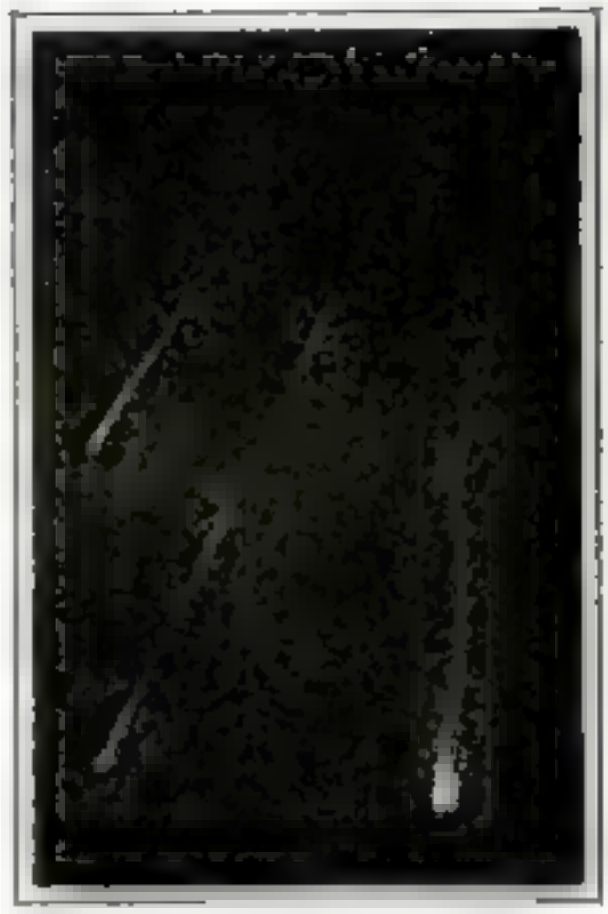

Shooting stars with luminous tails of dust.

Most are much smaller. Among the interesting shapes they assume are globes and tear-shaped drops, suggesting the terrific heat that must have melted them as the parent body fell. This identifies them as fragments that a shooting star threw off. Tested with a magnet, many of the particles adhere to it. These contain iron and iron-nickel alloys, which would be expected in a meteoric body.

Especially plentiful recoveries of this odd "star dust" have followed the periodic meteor showers that astronomers expect each year.

Once an enormous meteorite whizzed close to the observatory at Donville. Two days later a shower of microscopic particles settled upon the collecting box of the observatory, so thickly that they could be seen with the naked eye. They had been left floating in the air by the meteorite.

This astronomer's observations leave no doubt that shooting stars, or meteors, are of exactly the same nature as meteorites. The only difference is that meteorites reach the earth, while meteors are consumed in the upper air by the heat generated by atmospheric friction and only their dust descends to the earth.

Collecting meteoric dust by melting and filtering snow. At [illegible] it is examined by microscope.

Chain Broadcasts on *One Wave* Is *Latest* Radio Plan

By JOHN CARR

A REVOLUTIONARY change is impending in radio broadcasting. Stations you now hear at certain points on your dial will disappear from their accustomed places and new stations will fill the gaps. No longer will the same program come from dozens of different stations each on a different wave length. Chain programs will be received with satisfactory volume by listeners who now hear them faintly, if at all.

These changes will come through synchronous broadcasting—a system that permits two or more stations to transmit the same program at the same time on the same wave length.

Chain broadcasting has brought the need for synchronous operation. At present between five and seventy-five of the precious ninety-six waves that are available often are employed in sending out a single program. Engineers long have wanted to eliminate this wasteful method. They knew that stations transmitting the same program ought to transmit on the same wave and have devised several systems of practical synchronous broadcasting.

When a radio broadcast transmitter is in operation, it sends out a high frequency electrical carrier wave, and it is the frequency with which the electrical tension changes—or, in other words, the rapidity of its vibration—which governs the wave length. When you tune in your radio receiver, you set it so that it responds to this frequency.

The much slower audible vibrations of the human voice or of a musical instrument are converted by the microphone in the studio into equivalent electrical vibrations. These vibrations, after considerable amplification, are impressed on the carrier wave, which literally carries them to your radio receiver.

IN THEORY it is only necessary to have two stations send out carrier waves of exactly the same frequency in order to permit both to send out the same program on the same wave at the same time. But when you stop to consider that the carrier waves in the broadcast band vibrate or oscillate at speeds ranging from 550,000 times a second up to 1,500,000 times a second, you can realize what a tremendous job it is to keep the frequencies of the two stations exactly the same. Any difference, even as little as fifty or one hundred cycles a second, which would be a microscopically small percentage of error, would cause interference between the two carrier waves and make hash of the voice or music.

DOUBTLESS you have noticed newspaper reports in the past telling of the refusal of the Federal Radio Commission to renew some broadcast station's license because of "off wave" transmission. As the Commission permits a deviation of 500 cycles, the difficulties in the way of holding to a specified frequency must be obvious, since no station would knowingly operate off-wave.

The use of quartz crystals has solved the problem of controlling oscillation to a precise frequency. A quartz crystal, when connected to *(Continued on page 147)*

Build *Your Own* Private Radio Set for $12

POPULAR SCIENCE MONTHLY Blueprint No. 130 describes in great detail the construction of this set. It includes instructions for winding the tuning coils. A list of parts approved by the Popular Science Institute is included with each blueprint. This list also will be mailed without charge to readers who wish to work from this article without ordering the blueprint. Address Technical Editor, Popular Science Monthly, 381 Fourth Ave., New York.

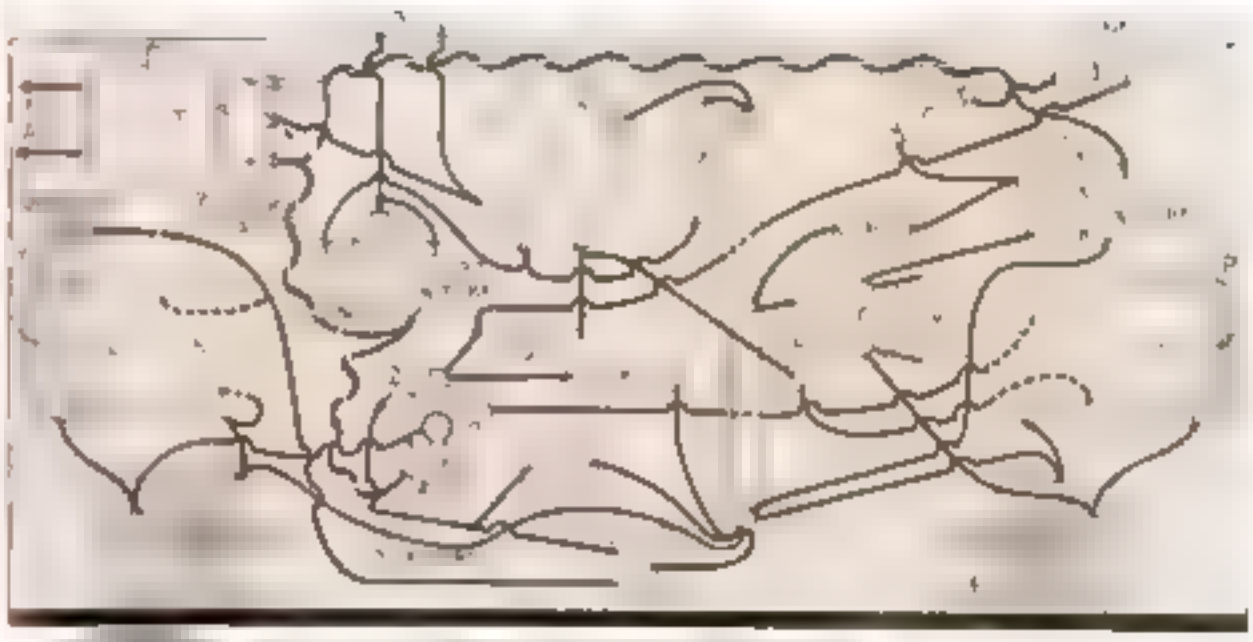

By ALFRED P. LANE

HERE is a novel little radio receiver you can build yourself for your own personal use. It operates directly from the light socket and will give headphone reception of ample volume on all local and many distant stations. Since it brings the broadcasting to you by way of headphones instead of a loudspeaker, you can use it anywhere at any hour of the day or night without disturbing anyone, not even those in the room with you.

If you have this set, you do not have to listen to programs someone else is anxious to hear over the regular family set. The headphones, shutting out the noise from the loudspeaker, will let you hear the program that particularly interests you

Designing the set for headphone use only allows a remarkably simplified circuit with corresponding economy in cost of construction. Just three tubes are used One is a type 224 screen grid tube that functions as a radio-frequency amplifier The others are type 227 A. C. heater tubes, one a detector and the other a rectifier to supply the moderate B current requirements of the circuit. No high voltage transformer is used and the filter circuit is of the simplest description

Most radio experimenters who have the usual collection of miscellaneous parts on hand left over from previous work will find that they have practically everything needed to build this set

Even if you have to buy every part, the cost may be as low as twelve or fifteen dollars if moderate priced parts are used and not over twenty-five dollars if you insist upon having the finest parts obtainable

The size of the panel on the receiver shown in the illustrations is seven by

cause the B current requirements of the set are so small The [illegible] and act of B current also explain why a 227 tube may be used [illegible] The [illegible] set is in a [illegible] with [illegible] current [illegible] and [illegible] in this case is [illegible] that the [illegible]

twelve pounds [illegible] With care it should [illegible] ble to make the [illegible] in every dime [illegible] have [illegible]

[illegible] e B circuits of the set, there is practically no hum. This is be-

Fig. 2 The front panel is here seen fitted to the baseboard and the wire connections are being soldered to sockets.

circumstances, attempt to add another tube to this circuit to get loudspeaker reception. A severe hum would result and neither the 227 tube nor the secondary winding of the audio transformer used at N would stand the extra load.

Here are the parts you will need to build the set:

AB — Radio-frequency stage tuning unit.

CD—Detector stage tuning unit.

E and F—Variable condensers, .00035 mfd. capacity

G—Grid condenser, .00015 mfd. capacity

H—Fixed condenser, .002 mfd. capacity

J, K, L, and M—Fixed condensers, 1 mfd. capacity, 200-volt

N—Audio transformer used as filter choke

O—Radio-frequency choke coil

P—Variable resistance, 0 to 5[illegible] ohms

Q—Fixed resistance, 25,000 ohms

R—Grid leak, 2 megohms

T—Filament heating transformer, 2 volt secondary

Y1, Y2, and Y3—Y-type sockets (five-hole)

Two dials, panel, baseboard, [illegible] plate, insulated wire, electric light switch, screws, etc.

AB and *CD* are standard factory tuning units designed for use with 0.00[illegible] mfd. condensers. *AB* is the antenna coil so-called because it is connected between the antenna and the radio-frequency amplifier tube. *CD* is a radio-frequency transformer designed for use with screen grid tubes. If you wish to wind these coils yourself, *A* should have twelve to fifteen turns of No. 26 wire on a coil form one and three quarter inches in diameter. *C* should be wound on the same size form with seventy-five turns of the same size wire. Coils *B* and *D* are wound on two-inch coil forms with eighty-six turns of No. 26 wire spaced thirty-six turns an inch. If you cannot space-wind them use four or five less turns and wind the turns against each other.

E and *F*, the tuning condensers, may be of any style or make provided the maximum capacity is as specified.

Be sure that fixed condensers *J*, *K*, *L*, and *M* have a rated working voltage of not less than 200 volts.

The audio transformer *N*, the secondary circuit of which is used as a filter choke coil, may be of any make. Any old audio transformer you have on hand will do nicely provided the secondary winding is in good condition.

Transformer *T*, which supplies the two-and-one-half-volt current to heat the filaments of all three tubes, should be rated to handle at least that many tubes. There are several different makes of these small transformers, most of them rated for from six to ten tubes.

It is possible to use a toy transformer at this point in the circuit provided it can be set to give exactly two and one half volts as determined by an accurate [illegible] type voltmeter. Merely [illegible] to the scale on the toy transformer is not sufficient. The actual voltages developed by a toy transformer may be off in voltage sufficiently to render the set inoperative or, if too high, seriously shorten the life of the tubes.

If the two-and-one-half-volt winding has no center tap, it will be necessary to purchase a ten or twenty ohm center tapped resistance and connect it across the two-and-one-half-volt terminals. Connect the center tap of the resistance as indicated for the center tap of the winding.

Note that there is a metal plate arranged at right angles to the front panel to shield the detector circuits from the radio-frequency stage. Any metal except iron can be used for this plate. Its size is not critical. Make it about the size indicated in the illustrations. It can be left out entirely with only a slight sacrifice in signal strength.

Figs. 3 and 4. At top, side view showing detector stage tuning unit in foreground. Above, a view from other side with radio-frequency unit in place

This set has been tested and approved for home construction by the Popular Science Institute.

After you have all the required parts, the first job is to drill the front panel, which may be of composition or wood, to mount the variable condensers and the variable resistance which serves to control volume. Place these parts in approximately the positions shown in Fig. 6, the view of the front panel. Next fit the front panel to the baseboard and then mount all the parts on the baseboard following the arrangement shown in Fig. 1, the top view.

After fitting the parts in place you are ready to start wiring, beginning with the filament heating circuit. This, as Fig. 1 (the top view and picture wiring diagram) shows, is made up of two wires twisted together to form a cord leading from the transformer terminals to the F terminals of the sockets. The wires are twisted together in this way to prevent a capacity effect that would cause a hum.

Be sure to study Fig. 1, the picture wiring diagram, or Fig. 2, the theoretical diagram, and follow these diagrams as closely as possible. As you put in each wire, check it off with a pencil on the diagram so that none will be overlooked. After you have finished the wiring, rub out all the pencil marks and check each wire again to make sure that you have everything right.

Note that the metallic shielding plate, the casings of condensers *J*, *K*, *L*, and *M*, and the metal frame of audio transformer *N* should all be metallically connected together. The receiver operates without any ground connection. No ground should be used, as it would cause a short cir-

cuit with the 110-volt light line.

In the picture wiring diagram, Fig. 1, you will see that the tuning units *AB* and *CD* have been tipped over so that you can see the exact connections to the coils. The direction in which the wire is wound in these coils is not important, but the coils must [illegible]

The top end of coil *B* should be connected to the stationary plates of condenser *E*, and the top end of coil

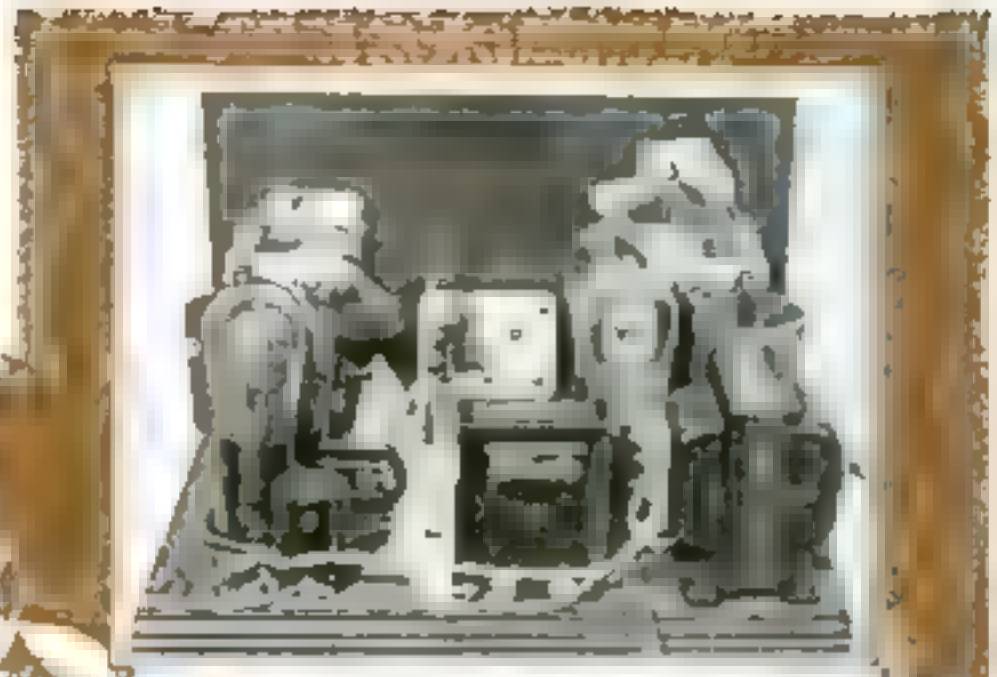

Fig. 5. Rear view with filament heating and audio transformers on right and radio-frequency choke coil and bulb socket at left

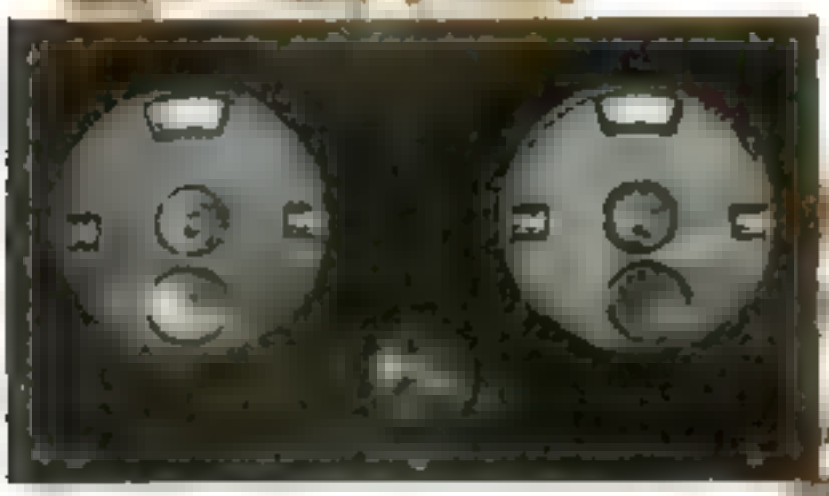

Fig. 6. View of the front panel after variable condensers [illegible]

D should be connected to the stationary plates of *F*. Note particularly the connections to coil *C*. The plate terminal of socket *V2*, the screen grid tube socket, should be connected to the bottom end of this coil.

It is not necessary to purchase any special cap connection for the cap on the screen grid tube in socket *V2*. As shown in Fig. 1 this can be a piece of flexible wire with a loop formed in the end to fit over the cap and the other end connected to the stationary plates of condenser *E*.

Figure 1, the picture wiring diagram, shows two sets of wires which must be connected to the 110-volt A. C. light line. Two pieces of drop cord should be used to make these connections. One piece should be long enough to reach the [illegible] and the other a short piece that can be spliced to the long one. The cord on the two-and-one-half-volt transformer supplies the long piece. Fit a through cord switch in this cord so that you can turn the set on and off without pulling the plug out of the socket. It is not advisable to wire the 110-volt circuit to a switch on the front panel as, in an unshielded circuit of this type, there would be a chance for a hum due to the capacity effect.

After the wiring is complete and you have carefully checked it, place a 227 tube in socket *V1*, a 224 tube in socket *V2*, and a 227 tube in socket *V3*.

Next connect the antenna to the binding post or spring wire clip at one end as indicated in Fig. 1, the picture wiring diagram, and connect the headphone cord tips to the binding posts at the back of the set as indicated in this same diagram.

If you only want to hear local stations a few miles away, you can get excellent results with an indoor antenna ten or twenty feet long strung around the picture molding. If you want distance, put up a good outdoor antenna from fifty to 150 feet long depending on how far you are from the station and the intensity of reception in your particular neighborhood.

Make sure that the antenna is well insulated as, in this circuit, if the antenna becomes short circuited, either the fuse will be blown, the tube in socket *V1* destroyed, or the secondary winding of audio transformer *N*, the filter choke, burned out. If there is any doubt about the antenna put a fixed condenser of any capacity from .005 mfd. up to 1 mfd. in series with the antenna lead. This is a wise precaution even if the antenna is well insulated and will not have the slightest effect on the quality of reception.

When everything is ready turn on the current and then wait for about half a minute to be sure the tubes are properly heated. Now try the volume control. You will find that turning the knob too far [illegible] way will produce a squeal if the two coils are tuned to the same wave length. Turn the knob back from this point and carefully turn the dials till you locate the stations you want.

In tests at the Popular Science Institute radio laboratory it was found that all the powerful near-by stations could be brought in with only a piece of wire strung around the room. The volume on the headphones was adequate. When tested on a good outdoor antenna the volume from these stations was uncomfortably loud at maximum setting of the control.

It is also possible to get reception without any antenna by substituting a ground connection instead. In this case one terminal of a .0001 to .0005 mfd. fixed condenser is connected to the antenna binding post and the remaining terminal of the condenser is grounded on the water pipe in the usual way. In some cases reception by way of the ground causes a slight hum, so the best arrangement where an outdoor antenna is impossible is the indoor antenna. Note that it is desirable to use a .005 to 1 mfd. condenser in series even with an indoor antenna to prevent any possibility of a short circuit.

Undoubtedly many readers will desire to build this receiver as a portable outfit because of its light weight and simplicity. Assuming that the general arrangement of the apparatus is retained, it is possible to make several minor changes to save space. The socket *V2* may be placed so that the type 224 tube is horizontal to save height. The condensers could be mounted with the shafts vertical, using a top panel.

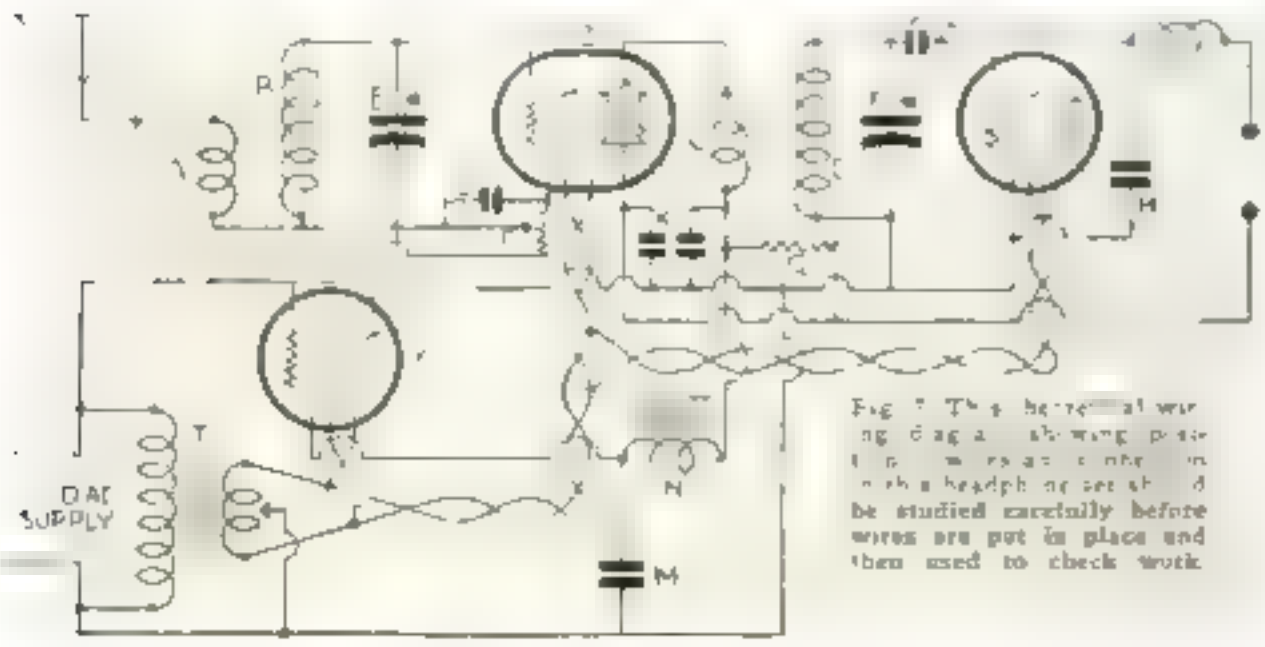

Fig. 7. The [illegible] wiring diagram showing [illegible] be studied carefully before wires are put in place and then used to check work

Hurray Bill Anders shouted, waving the letter under Gus's nose Now dad'll let me buy a car!"

Gus Gives Pointers on Car Buying

Veteran Mechanic Talks of Secondhand Autos and Shows How Real Bargains Are Sometimes Possible

By MARTIN BUNN

"GEE WHIZ!" exclaimed young Bill Anders as he gazed longingly at the shiny new automobile. "I just wish I had a car like that!"

It'd suit me right down to the ground, too," echoed Ted Anders, Bill's younger brother.

Gus Wilson, veteran auto mechanic and half owner of the Model Garage, looked at them critically.

You young scalawags'll never get a car like this just by wishing," he grumbled as he lowered the hood and snapped the catches. "Instead of hanging around here under my feet all the time, why don't you earn some money so you can buy one?"

I do earn money," young Bill indignantly protested. "I've got enough saved up already to pay my way through college next year."

At that moment the postman poked his head in the door and handed several letters to Gus.

"You might as well take this and save me stopping at your house," he said, thrusting a letter into Bill Anders' hand.

Joe Clark, Gus's partner, stepped out of his little office to get the mail just in time to hear Bill let out an excited yell.

"Hurray!" he shouted, waving the letter under Gus's nose. "I've won the scholarship! Now dad'll let me use that money to buy a car! What kind of a car shall I get, Gus?"

Well," Gus grumpily observed, "if you're like the rest of these collegiate lards I see round here, you'll collect a rattling heap of tin."

Not for me," said Bill firmly. "I want a real car and then I want to keep it in tip-top condition. Do you think I'd do better to buy a good secondhand car instead of a new one?"

GUS threw up his hands. "Solomon himself couldn't give the right answer to that one," he said. "It depends on a whole lot of things. How much money have you? What type of car do you want? What do you expect out of a car? How much do you expect to use it? Even with all those questions answered, there's still plenty of room for argument. About all I can do is to line up some of the things you'll have to figure on and let you decide for yourself."

"FAIR enough," said Bill. "Just tell me the arguments both ways. That'll give me something to go on."

"To begin with," said Gus, "the main difference between buying a new car and a secondhand bus is that the new one is pretty much of a sure thing while the secondhand outfit is, most times, just a gamble.

"When you buy a new car there is always the chance that some part may prove defective, but you can be dead sure that there aren't any worn parts. If you take the trouble to cover at least a couple of thousand miles before the guarantee runs out, you're almost certain to smoke out anything really defective so you can get it replaced free.

"Another thing about a new car is the tires. You start out with new rubber on every wheel, and in the ordinary course of events you needn't expect any tire trouble at all for a couple of years, except maybe a couple of punctures.

"The rubber on a secondhand car may be pretty rotten without looking so awful bad. I've seen lots of secondhand cars need new shoes all around before the year was out. *(Continued on page 149)*

Gus Says:

IT IS a good idea to use your eyes in picking a car but don't depend on them too much. Your eyes can tell about style, color schemes and general appearance, but they won't tell you much else. If you see evidence of careful workmanship and attention to details that's indirect evidence that the car is a good job, but your eyes won't tell the quality of materials in the car.

Treasure Island Smoker's Tray

By CHARLES H. ALDER

HOW would you like to make a new kind of smoker's tray—one that tells a story? A story of the days of pirates, of gold and jewels, of shipwreck, of adventure and death?

All right, here's a tray that does just that! Made in tableau form, it depicts the sandy beach of some far distant tropical island in the South Sea with a wrecked boat, a pirate's weather-beaten iron-bound oak chest, an old headless wine cask, the skull and ribs of a dead pirate, and the cutlass that pierced his heart.

What a bloodcurdling yarn you can invent to explain these relics! But don't stop to do it now, just get out your tools and start to work

The chest is merely a small box with a rounded top cut from a solid piece. Any small scraps of soft wood or pieces cut from a thick cigar box may be used, but they should not be thinner than ¼ in. Mark the plank divisions with a pencil and trim out the grooves with a knife or a chisel, or use a file, if you prefer. To imitate a weather-beaten appearance, use a wire brush and rub the wood vigorously with the grain. Then apply a coat of fumed oak or other dark stain of either the alcohol or water type If you wish to use an oil stain, the staining will have to be left until after the bands are glued on, and you will have to be careful not to allow any surplus glue to get on the exposed wood, or the stain may not "take."

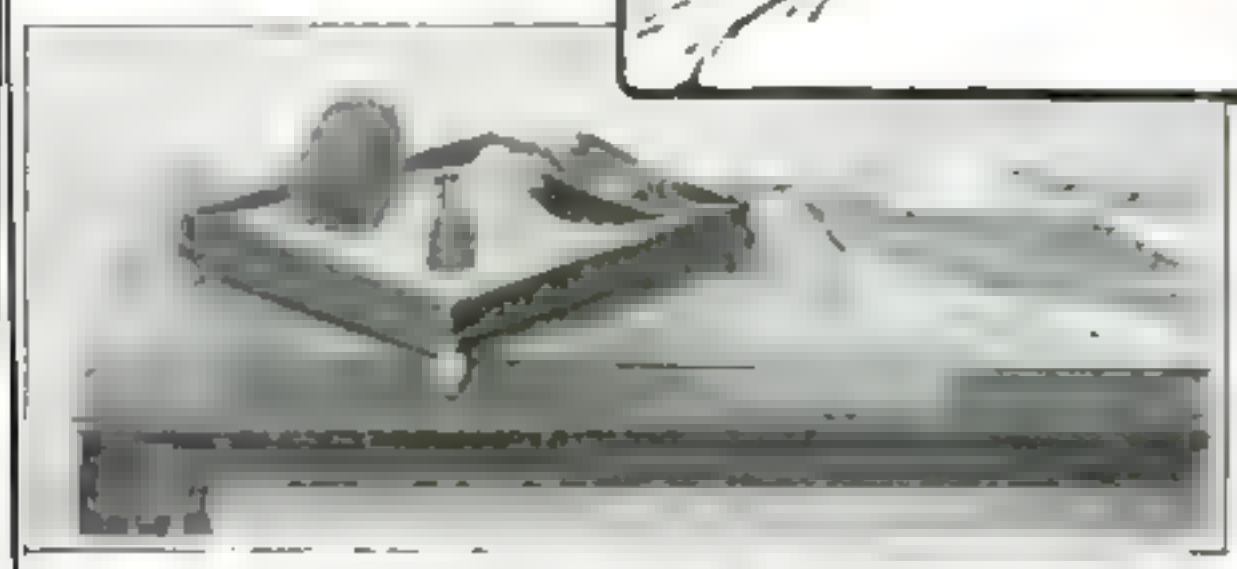

In this smoker's set the treasure chest serves as a cigarette box, the wrecked boat is the pipe rack, and the wine cask holds the matches. There's a pirate's bones and cutlass, too!

The next step is to glue on the "iron" bands, which are of cardboard. Then cut pins to the correct length—about ⅛ in.—for studding the chest, and hammer them in lightly, after first making small holes with an awl.

To make the iron rings for the handles, wrap a piece of wire several times around a large nail and saw the wire lengthwise of the nail. Then remove the rings and hammer and file them to shape. Use pins for making the two staples to secure the rings to the chest

The hinges are merely four long staples, also made from pins; these are hammered slantwise into the hinge edges of the chest as shown. A small chain is fastened inside to prevent the top from going too far back and coming off its hinges

Now go over the bands with the fumed oak stain. You may stop here if you wish, but it is better to apply a coat of dull varnish and then rub it down with a mixture of rottenstone and liquid wax; or use shellac in place of varnish and finish with the rottenstone and wax.

The barrel or wine keg is a large spool. Trim out the inside with a knife from both ends until the hole is as large as necessary. Then whittle the outside to the shape of a barrel, and file and sandpaper it smooth. Draw the staves on the outside with a pencil, and use a knife or file to make the grooves. Mark the staves on the inside by the same procedure Wire-brush the barrel lengthwise of the staves, apply a coat of fumed oak stain, glue on the hoops, which are cut from cardboard, and give them a coat of stain. Plug the lower end of the keg with a cork and cut off the bottom at an angle.

Now comes the boat. Find a straight-grained piece of white pine about 2 by 4 by 6 in., mark the shape of the boat on it and whittle to shape. Next cut the end of the boat in a zig-zag fashion to give it a ragged and broken appearance. Mark the planking with a pencil, and file or cut the grooves. The ribs can be made from wood

$50 for Novel Ideas

DOESN'T this article suggest to you that many other useful, decorative, story-telling novelties could be designed? If you have an idea for one, write a letter of not more than 250 words about it (with a rough pencil sketch, if you wish) and mail to the Home Workshop, POPULAR SCIENCE MONTHLY, 381 Fourth Avenue, New York, on or before April 30, 1931. For the best letter $25 will be paid; for the second best, $10; for the third, $5; and for the next ten letters in order of merit, $1 each.

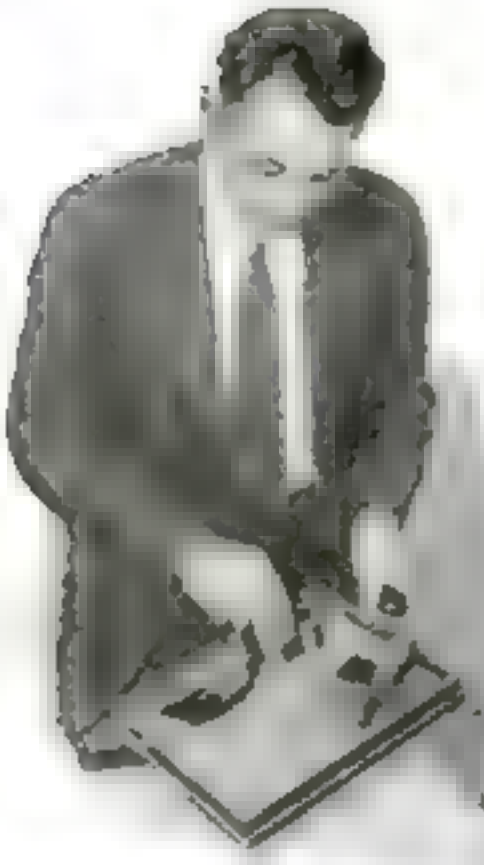

Mr. Ader points out the pirate's ribs pierced by the cut saw; these also appear clearly at the right

or thick cardboard, but do not put in all of them; remember that you are constructing a wrecked boat, not a new one. Now add the gunwale and attach a small chain in the bow of the boat, it need not be more than 1 in. long. Pins are used to fasten the ribs, keel, gunwale, stem, and chain in place.

The sides of the boat can be painted white first and antiqued after or the whole boat inside and out can be stained and treated in the same manner as the chest.

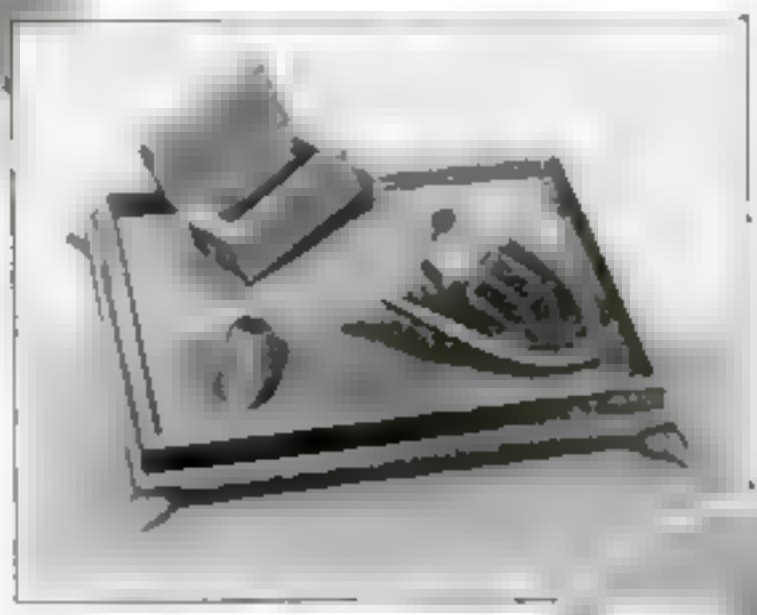

The complete tray before the sand is added. In the circle is shown the plaster mold for casting the skulls.

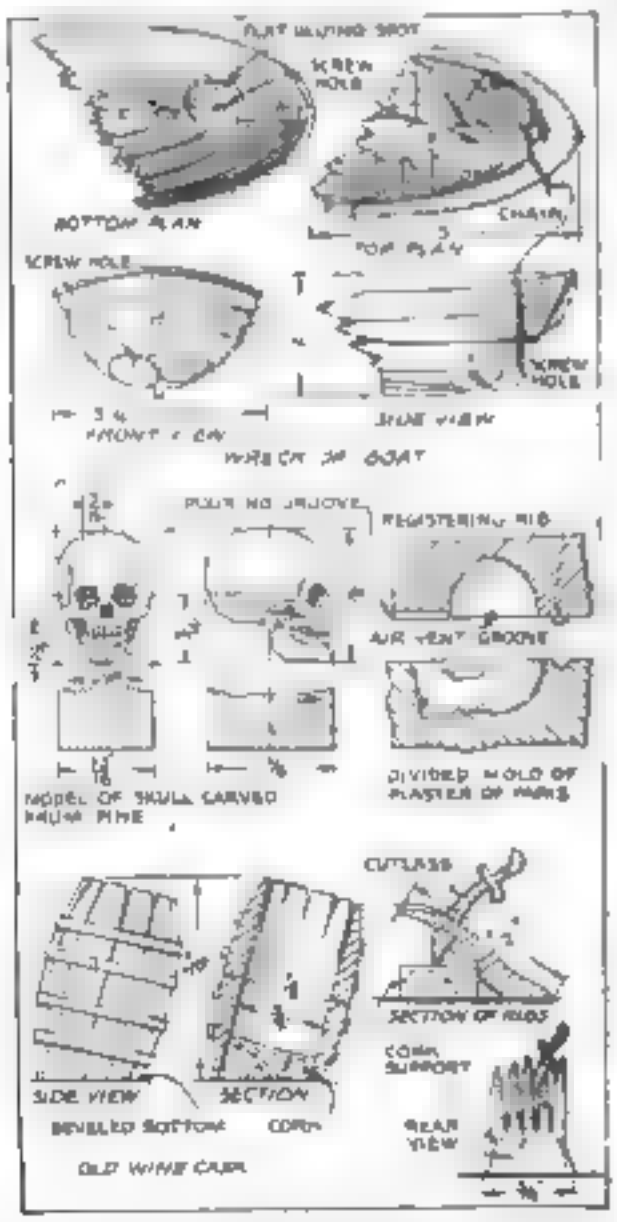

How to make the wrecked boat, the skull pattern and mold, and the cask, ribs, and cutlass

dull white streaked with gray so that it has a dried bone look. Leave the other four the natural lead color or give them a coat of silver or bronze paint, if you prefer. Use black paint for the eyes, nostrils, and jaw markings of all five.

From a piece of cigar box wood, cut out the ribs of the dead pirate. Paint them a dull white and treat them the same as the skull. If you prefer, you can make them from bone, metal, or other material more durable than wood.

Lead, wood, fiber, or even a toothbrush handle may be used for making the cutlass. Paint it a dull black or a rusty color. To make it stand up between the ribs, stick the point of the cutlass in a cork and glue the cork to the bottom of the tray when you are ready to mount everything.

The tray itself may be any shape you would like to have it. The skull-feet are fastened to the bottom with screws before the rim is added. The tray is wire-brushed and finished to match the chest.

The boat, the chest, the cask, the pirate's bones, and the cutlass are glued and screwed to the bottom of the tray. If the chest does not rest in the sand deep enough, cut one corner off so that it will look to be lower. Cut a wedge to fit between it and the tray, glue the wedge in place, and then glue the chest on top of it.

Be careful to have the boat at such an angle that a pipe will rest in it naturally—that is, so that it will not slide out. The skull should be built up so that it appears to rest on top of the sand. The finishing touch is given by pouring white sand in the tray nearly to the top of the rim.

If you like, you can add the charred remains of a camp fire which in reality will serve as a receptacle for ashes.

serve as the feet of the tray. When you have whittled the pattern for the skull, make a mold from plaster of Paris as shown. This is done by pouring a mixture of plaster and water into a tin lid, a small cardboard box, or any other convenient container. The skull pattern is well greased and pressed halfway into the plaster, which is allowed to harden. Then a registering groove is cut in the surface of the plaster and the whole surface is oiled or greased. More plaster is now poured in until the skull is completely covered. When the plaster is dry, the two halves of the mold are separated and two grooves are cut into the surface of one of the pieces—a large groove through which lead may be poured and a small one to serve as a vent for the air to escape.

Before the metal is poured, it is most important to allow the plaster to dry through and through, otherwise steam may be generated and the lead spattered about by the force of the explosion. Tie or clamp the halves together, taking care they are exactly in register, and make a cast. If it is satisfactory, cast four more skulls and smooth them up. Paint one a

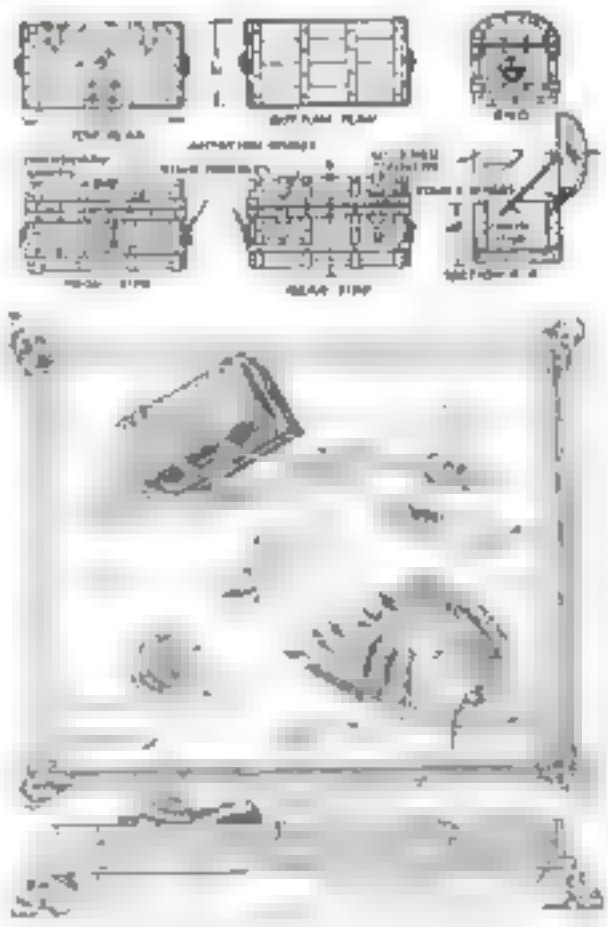

Working drawings of the treasure chest, and top and side views of the complete assembly

Dazzle-Painting a Model

By CAPT. E. ARMITAGE McCANN

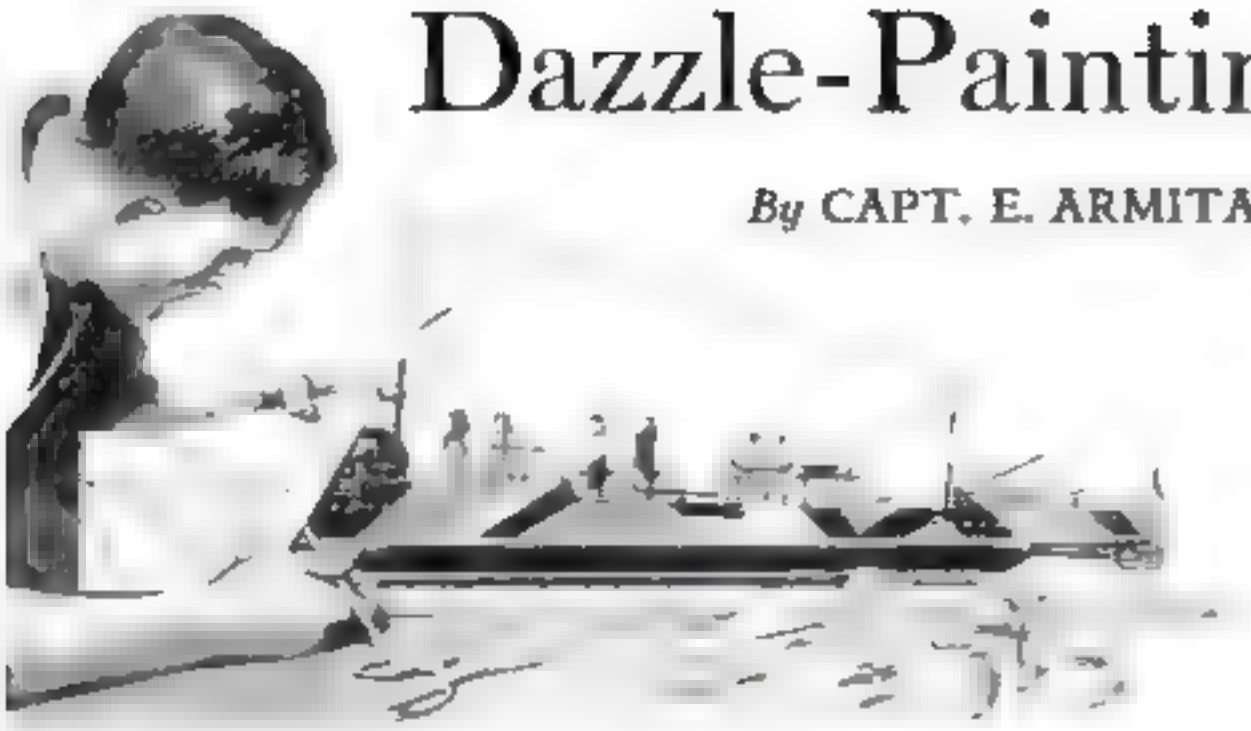

How to apply warlike camouflage to the destroyer *Preston*, as if on active convoy duty, instead of giving her the dull, monotonous gray used by the Navy for all ordinary purposes

SOME of those who are building our latest ship model, the United States destroyer *Preston* (P.S.M., Dec. 30, p. 87; Jan. '31, p. 90, Feb. '31, p. 90; and Mar. '31, p. 115), may feel that the uniform gray color is rather dull and somewhat out of place in a modern brightly colored room. Possibly other readers have been deterred from constructing the model for the same reason. If so, the remedy is a simple one—camouflage the model as if on active convoy duty in the World War. You will lose the clean, racy silhouette, but you will attain a brighter and more novel effect.

The camouflage used for ships was called dazzle paint. This was intended not to hide the vessel but to make it difficult to distinguish its form and direction of motion. It was used only in independent or convoy work, not in fleet action.

The two accompanying diagrams show the *Preston* model with dazzle painting schemes actually used in the World War. Note that the two sides are different.

The best way to apply the color scheme is to prepare a full size cardboard guide or chart for each side as shown. Paint all you can see from the water line up, including all structures and fittings. Carry the colors as far as the midship line, that is, to the center of the ship.

The colors, with the exception of the black, should be clear but not very strong. Artists' oil colors thinned with turpentine are excellent. The ship's number on both sides of the bow is left white.

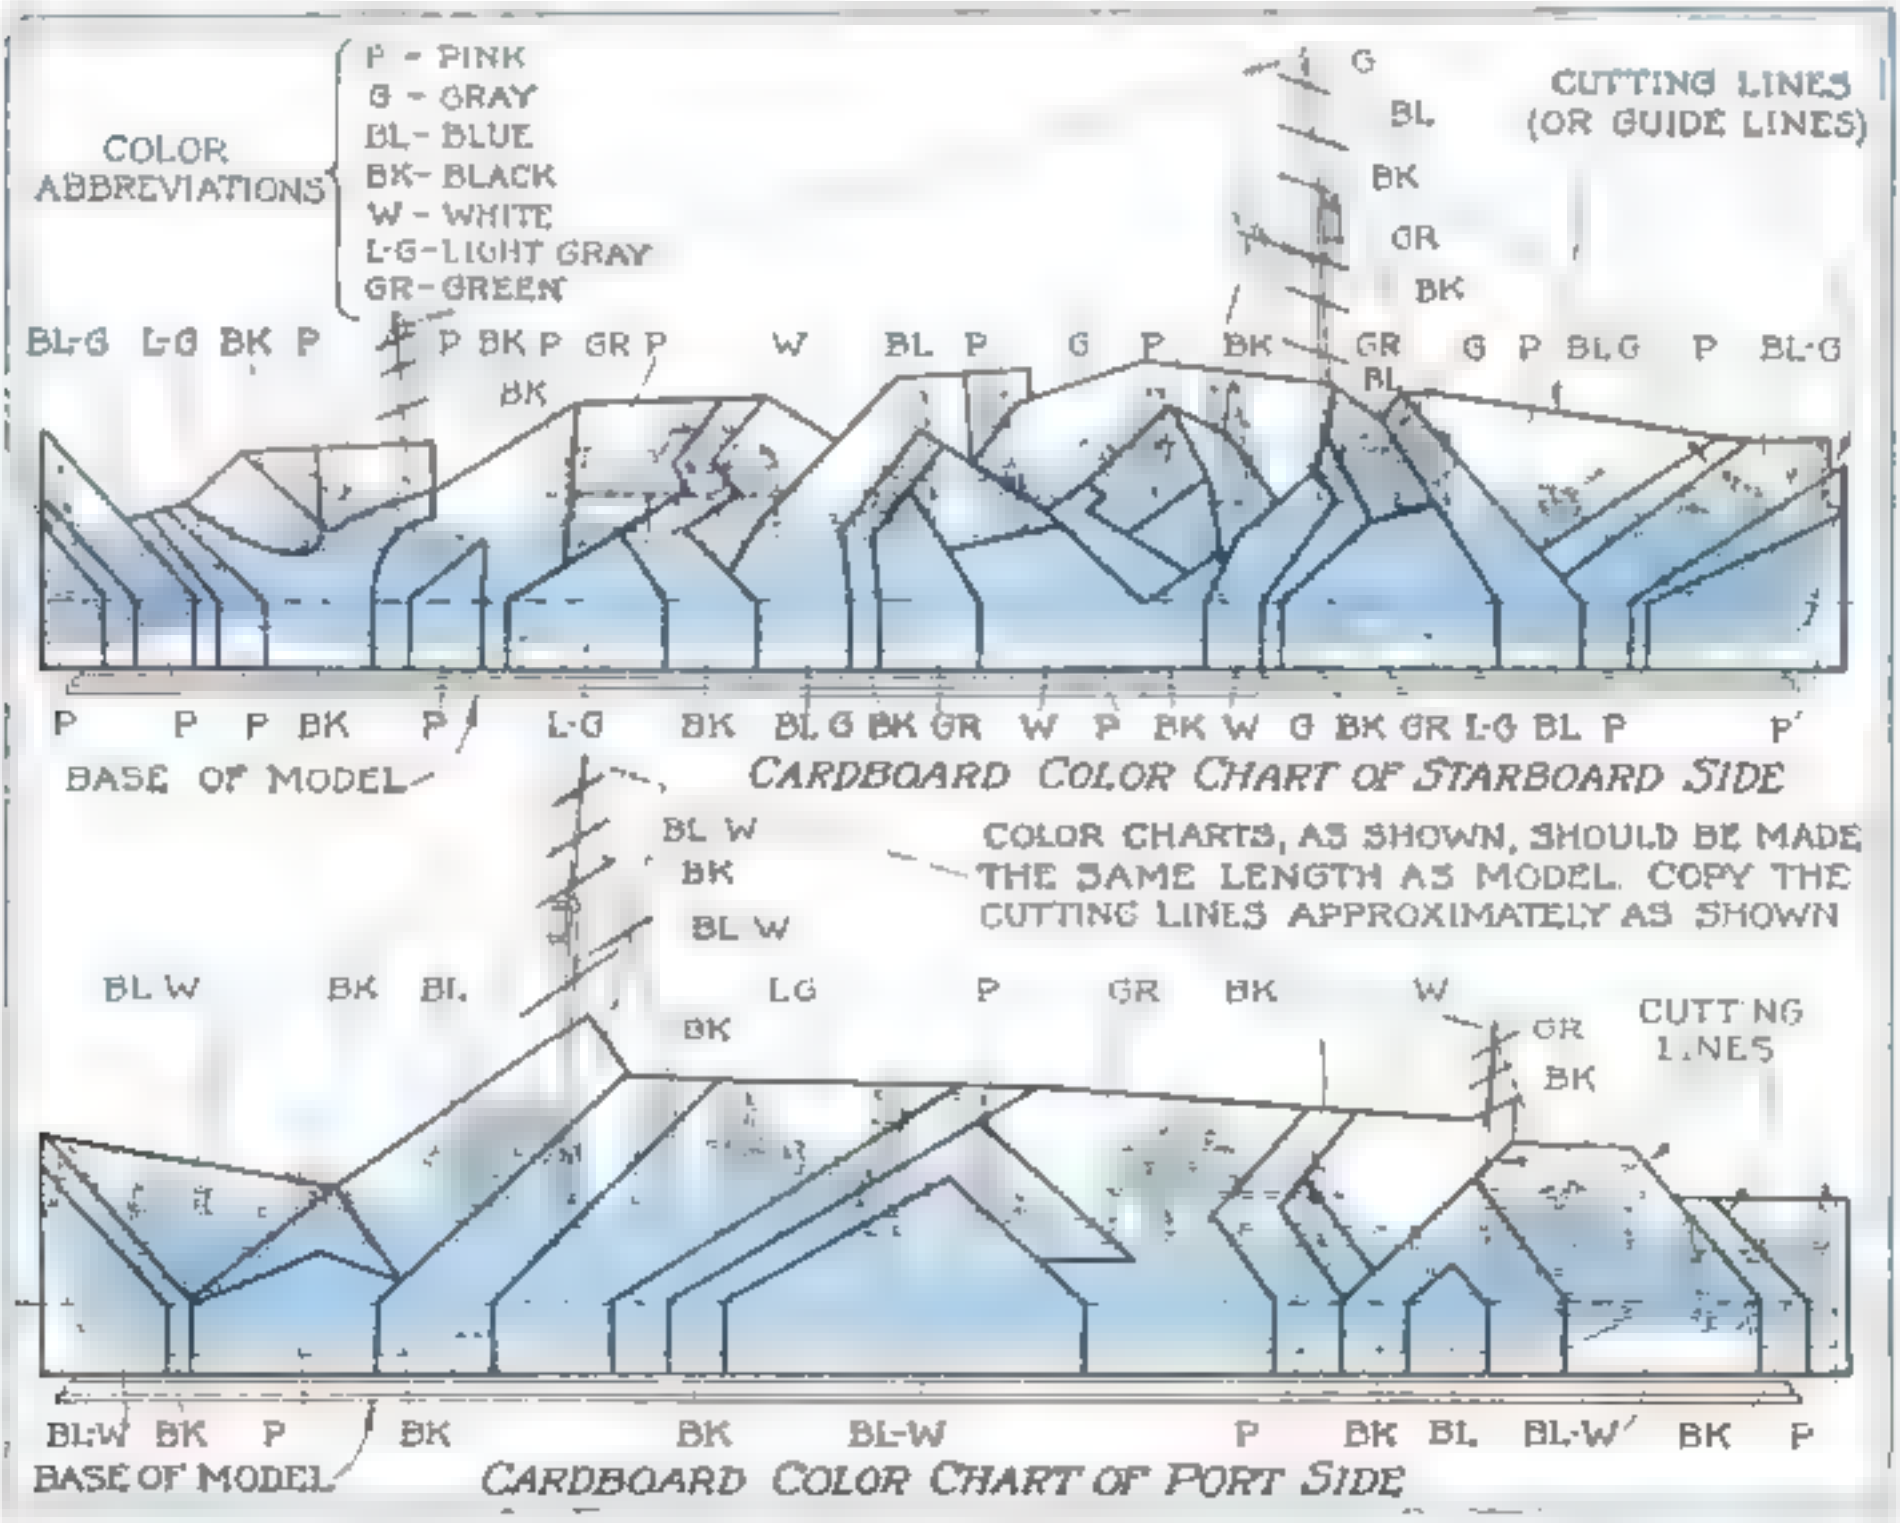

The cardboard camouflaging guides or templates. Begin painting at one end and cut off the cardboard section by section as the work progresses. Carry the colors only to the water line; below that the hull is dull red.

Modern Rabbit Hutch for Your Back Yard

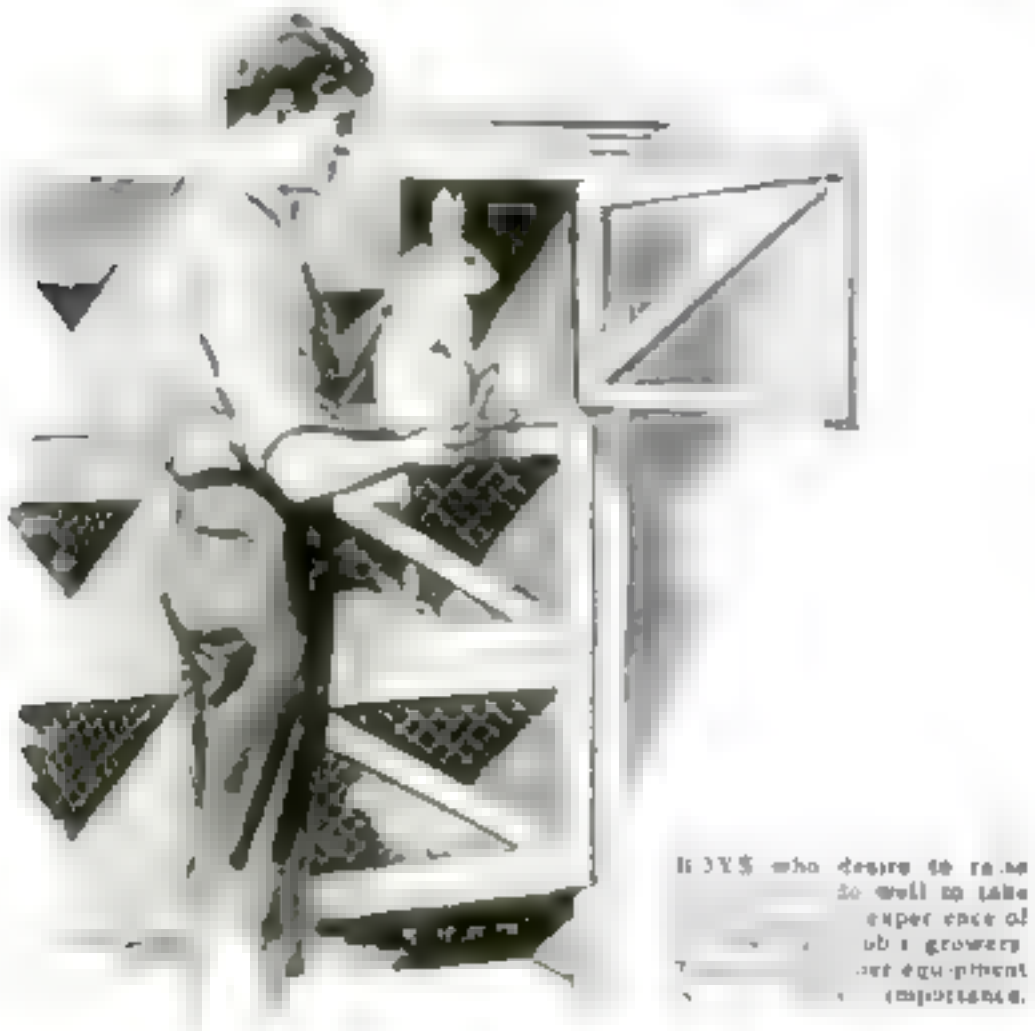

A two-compartment rearing pen for young rabbits. Notice the feed hoppers at each end.

THAT rabbit raising is fast becoming a popular and profitable pastime is shown by the fact that some 200,000 men, women, and boy rabbit growers throughout the United States sold skins to commercial furriers last year (P.S.M., Jan '31, p. 23).

Success in breeding and raising, however, depends to a large extent on the use of properly designed equipment. Rabbits, like all other animals, require a certain amount of fresh air and sunlight, and the amateur must be sure that his hutches and developing pens are so constructed as to provide these important essentials.

The hutch and developing or rearing pen illustrated in the accompanying drawings are the result of many years of experience and research on the part of W. E. Lloyd of the College of Agriculture, University of California. These designs represent the latest and most efficient developments in rabbit raising equipment.

The 3-tier, 6-compartment hutch shown directly at the right is constructed almost entirely of 1-in. lumber and 1-in. mesh wire netting. For the netting, galvanized wire mesh should be used in preference to the welded type as it is cheaper, often easier to obtain, and far more durable for this purpose. In order to prevent the rabbits from gnawing the wood the netting is placed on the inside of the doors.

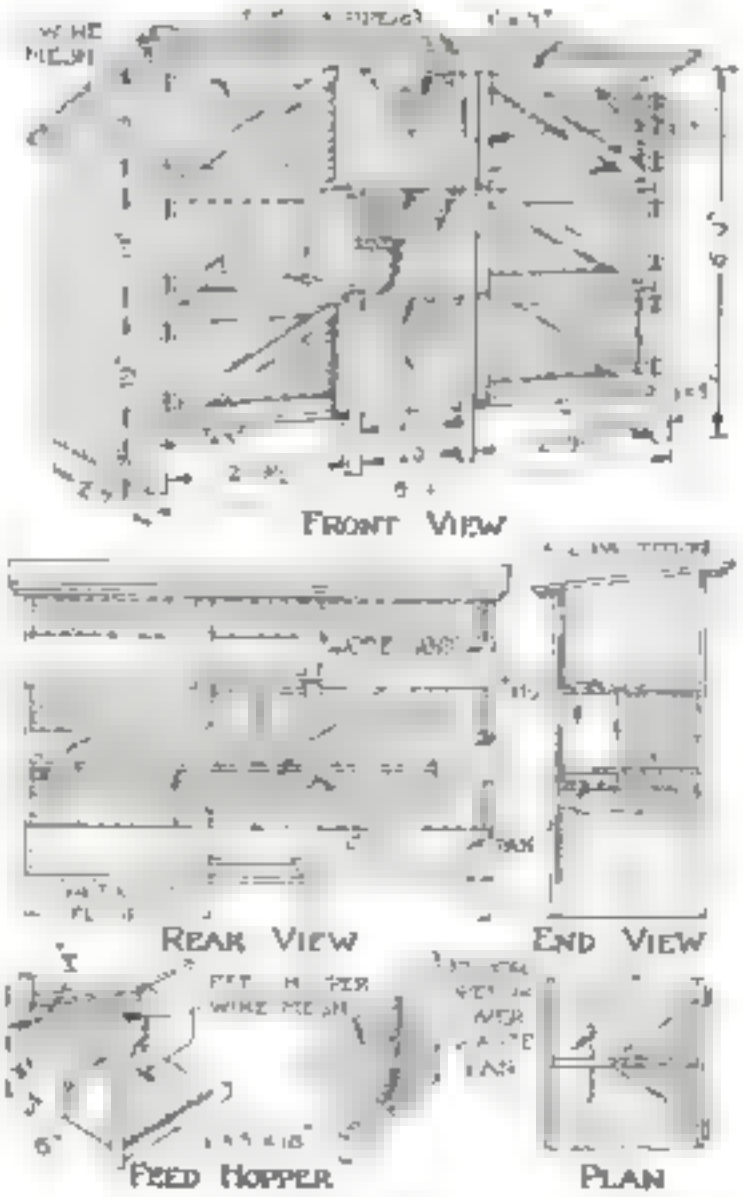

Perspective, rear, end and plan views and details of the hutch designed by W. E. Lloyd, an authority on rabbits.

While 2 by 2 in. floor joists are recommended in the drawings, 1 by 3 in. stock has been found to be sufficiently strong. Indeed, all of the lumber required can be obtained from old packing cases.

At the rear of each tier is a 1¼ by 8 by 19 in. galvanized iron waste pan, which is placed under an opening in the floor. This opening extends into each of the two compartments on each tier. The partition forming the division over the pan should stop just above the wire netting which is placed over the opening to prevent small rabbits from becoming caught.

One feature of these hutches is the improved feeding hopper, which allows the person who tends the hutches to place the hay within the reach of the rabbits without opening the door. Another advantage of this type of hopper over the usual open type, which is placed in the hutch, is that it is impossible for the rabbits to scatter the hay over the floor.

The grain and water for each compartment should be placed inside in earthenware dishes. Door feeders should be avoided as they can be removed by the rabbits.

In constructing the doors for the compartments, cut the end battens a little long so that they will extend above and below the top and bottom of each door to serve as door stops. The doors are preferably set flush with the sides of the hutch, and each is supplied with suitable hinges and a cheap door catch.

DOES should have a nesting box placed at the end of the compartment directly opposite the feed hopper. These nests should be about 10½ in. high, 11½ in. wide, and 18 in. long (inside dimensions). An ordinary apple box can be altered easily to serve.

Some nests are built with a partition in the middle and have the entrance at the opposite end from the actual nesting compartment. This will prevent the doe from scattering the young when she enters.

Rearing or developing pens similar to that shown are needed for the young rabbits. As in the hutch, 1-in. lumber is used almost entirely in the construction. The sides of the pen, together with the feed hoppers, are covered with 1-in. wire netting, while the top and bottom are covered with 2-in. netting. This type of pen will allow young rabbits to feed on green grass without the danger of having them dig their way out. Such a pen built to the dimensions suggested will accommodate from eight to twelve rabbits in each compartment.

Keeping *Golf Clubs* in Repair

Alex J. Morrison, *noted authority on golf technique, tells how to look after your irons and woods*

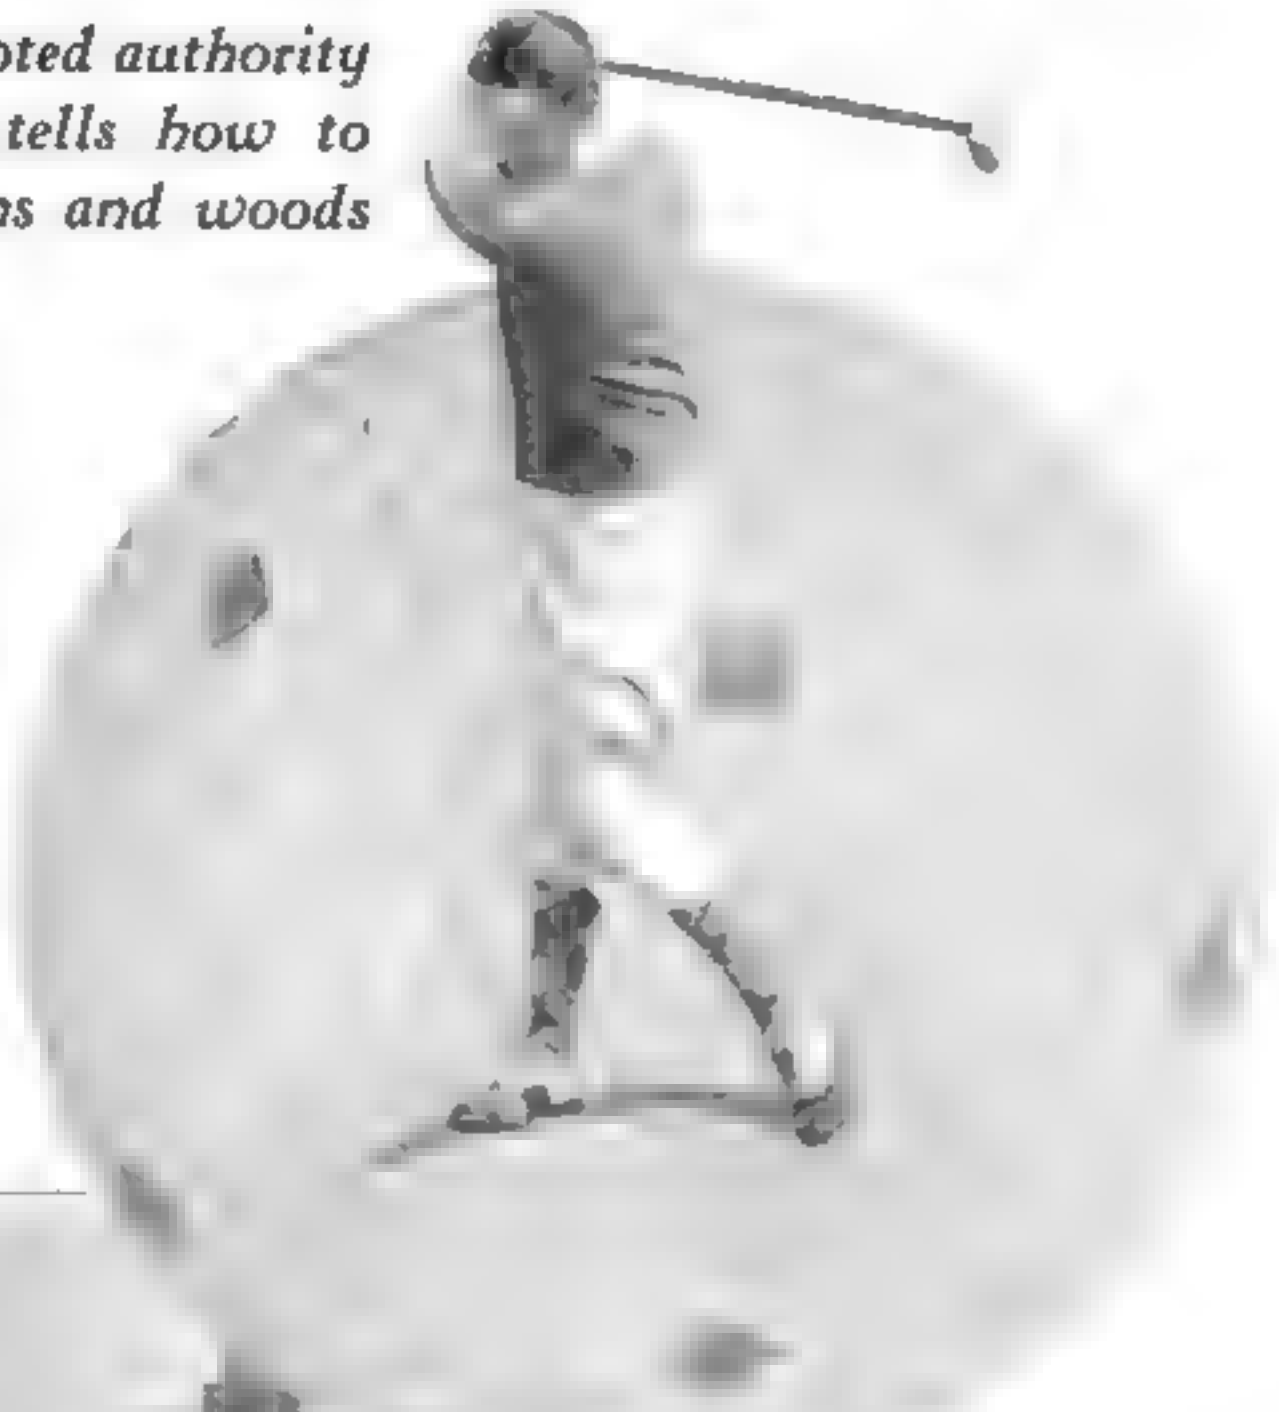

EVERY golfer takes great pride in his clubs. He is one workman—if I may call him that—who believes in the fitness of his tools as a deciding factor in his success.

By his very nature he is, alas, forever looking for something on which to blame the failure of his shots to reach the intended mark. Even a small gap in the leather of the grip on his club or a loose binding string prove to be a great annoyance. This is why everything about a golfer's kit should be shipshape

After he has once become acquainted with each of his clubs, they seem to develop into a living part of the player himself I know many a player who has become so attached to a favorite set of clubs that he would rather part with his right arm, figuratively speaking, than to lose them.

You probably feel this way yourself

Fig 1 Wooden clubs can be refaced easily with a file The loft also may be altered to suit, if so desired.

And if you do you must realize how necessary it is to keep your clubs in the best of repair Just get them out and look them over Many of the simpler repairs you can make yourself indeed you can do it in less time and, of course at much lower cost than if you searched out a professional club maker

To begin with, take up your wooden clubs. What shape are they in? Have they been properly protected from moisture?

Clubs that have been out in the rain or that have been dragged through wet grass always should be wiped dry with an oily rag after use Under no circumstances should clubs be put away without first drying them thoroughly Moisture if left on the head of a wooden club, will not only ruin the finish but will cause the parts to loosen up generally, thus spoiling the club.

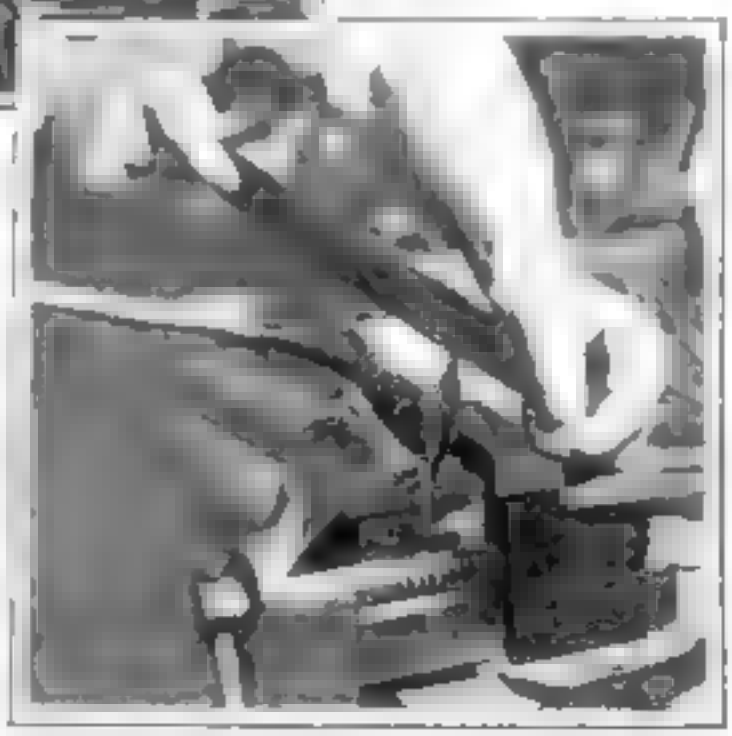

Fig 2 Scoring the face with the edge of a half round file. Notice rather between the vise jaws and club

Moisture tends to open up the grain of the wood, and when the wood dries, particularly in the case of wooden clubs with fancy inserts of other materials, the hitting surface begins to warp and crack. A common mistake that players often make is to put a dried-out club into water in the hope that it will tighten up the screws and other fittings that may be loose

Keep the wooden clubs out of water at all times When you are through using them for the season put a few drops of linseed oil on a rag and wipe them thoroughly Then take another rag with a mixture of a few drops of oil and a little shellac and give the club a vigorous rubbing. This will coat the surface and make it impervious for a time at least to further moisture

If any of the inserts such as ivory or fiber have become loosened it will be best to turn the club over to an experienced club maker or to return it to the factory where it was made It is part of the service that manufacturers

Fig. 3. Fine emery cloth is used for polishing the heads of iron clubs. Support the head on a steady surface.

render to their patrons to recondition patented inserts, which in many cases are guaranteed not to loosen up.

If the surface of the club head has become scarred, remove the old finish with an ordinary cabinet scraper or a piece of glass and then smooth the head with fine sandpaper. For refinishing, the darker colors seem to be most popular and serviceable for wooden clubs. The choice of color, however, is a matter of personal preference; the important thing is to see that you apply the stain with a rubbing motion that will distribute it evenly and in a very thin coating. The luster and finish can later be obtained by rubbing the surface with a rag on which a few drops of linseed oil and a very small amount of shellac have been placed.

If you desire, you can put a new surface on the face of your wooden clubs or change the loft you now have on your driver, brassie, or spoon by placing the head of the club in a vise as shown in Fig. 1 and filing the striking surface of the club face to the desired angle. The lines running across the surface, which help the club face to grip the ball, can be applied by using the edge of a half-round file in the manner shown in Fig. 2. Whenever the head of a wood club is placed in a vise, pad the jaws with leather.

Iron clubs, particularly when they are steel shafted, require little care other than a periodic cleaning and a frequent inspection of the condition of the leather grip and cord bindings.

In the event that the head on a wooden-shafted iron becomes loose, it must be removed from the shaft and reset after the shaft has been wound with sufficient twine to insure a tight fit. Such work as this should be done only by an experienced club maker.

To clean iron clubs of the type that are not made of a rustproof metal, use medium fine emery cloth. Take a piece about 3 in. square and first clean the neck of the club head by twirling the club around in the cloth, which is held in the palm of the hand. The remaining portions of the club head can be polished in the manner illustrated in Fig. 3.

If you care to put a finishing touch to your cleaning, you can polish crosswise on the heel and toe of the club face, thus adding greatly to the appearance of the job (see Fig. 4). Of course, if you are fortunate enough to have a buffing wheel, you can save considerable time in doing this work. Immediately after cleaning your iron clubs, the heads should be covered with a thin coating of light machine oil or petrolatum (sold commercially as vaseline).

Fig. 4. A finishing touch can be given the cleaning by polishing crosswise on both the heel and the toe.

If the grips on any of your clubs have become loose or if you desire to change the thickness of any grip (the size of the grip makes a great deal of difference in the feel of the club), you can do so by first removing the string at both the top and the bottom of the leather and then unwinding the leather. The material under the leather may also be rough and uneven; if so, it is best to remove a layer or two until the surface is absolutely smooth.

In building up the grip to the desired thickness, wrap a number of 1 in. wide strips of shirting around the shaft, spiraling downwards from the top (see Fig. 5). The material used in building up the grip, as well as the leather itself, must have a sticky surface to hold it in place after it has been wrapped, and the best way to obtain such a surface is through the use of a good grade of tire tape. Wrap a layer of the tape and a layer of the cloth and then some more tape. As a rule, the shaft is large enough to require only one or two extra layers of material under the leather in order to give the grip the needed thickness. Just try the leather over the tape and cloth to see if you have built up the grip to suit exactly.

After you have shaped the base material, leaving a top surface of cloth to which you can add library paste or shellac to help hold the leather in place, take the leather as it came off the club and fasten it to the wooden plug at the upper end of the shaft with a small tack driven into the wood. The manner in which you wind the leather on the shaft determines what kind of a grip you will have when the job is finished, so it is best to take pains to get the leather wound tightly from the very start.

As you wind the first lap, be sure that the edges of the strip overlap; then, as you spiral down the shaft, keep track of the right-hand edge of the leather and see that it fits in snugly against the edge preceding it. The manner of keeping an even tension on the leather while winding the grip can best be seen in Fig. 6.

When you have finished winding the leather, hold the lower end of it in place with a piece of tape over which you can then wind the binding cord.

The black linen twine used in binding shafts that have split and in binding grips in place is especially prepared and seldom does any substitute prove as efficient or long wearing. Any of the manufacturers of golf merchandise can furnish this twine at a nominal cost. It is a bit heavier than the heaviest of shoemakers' thread and treated to insure durability. Figures 7, 8, 9, and 10 will afford a clear idea of just how to handle the twine in wrapping your grips. A right-handed person should hold the club in his left hand

Fig. 5. Wrapping a layer or a layer of the tire ta[pe] ... thickness through ... in layers of ...

Below Fig 7 How the twine is placed on the grip prior to winding In this and the four illustrations following a shaft was used instead of a club in order to have a contrast of color *At right* Fig 8 The shaft is held in the left hand while the twine is guided and kept taut with the right

At left Fig 9 The first step in the operation of fastening the twine after the desired amount of binding has been applied Three or four more turns are made over the portion of the loop which lies along the shaft and then the slack is pulled through as illustrated below (Fig 10)

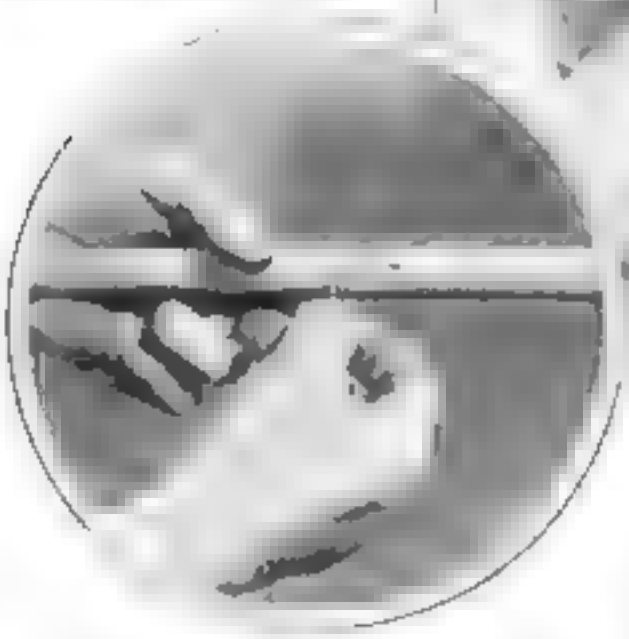

and guide the cord with his right hand. This may sound like an unnecessary point to make, but the correct winding of either leather or twine cannot be done in any other way unless, of course, the original workman who constructed your clubs happened to be left-handed

In wrapping, the club is continually turned counterclockwise (away from you) with the left hand while the right hand guides the twine and controls the tension with which it is wound. The winding should be started over a bent end of twine as shown in Fig. 7. By following Figs. 7 and 8, you will see that you handle the twine with your right hand placed over the twine. When near the end of the winding, however, place your right hand palm up and to the left of the twine and, taking hold of the twine 8 or 10 in. away from the shaft, invert a loop over the shaft as in Fig. 9. Now take the portion of the loop which is a continuation of the winding and wrap three or four loops over the end of the cord which lies along the shaft. Then pull through the slack as in Fig 10 and cut it off as in Fig 11.

As a finishing touch, roll the grip portion of the club on any clean and even surface (see Fig 12). This rolling is best done on the bench with a 3-in. board held under

Fig 11 Cutting the twine off close. All bindings should be given a coat of shellac

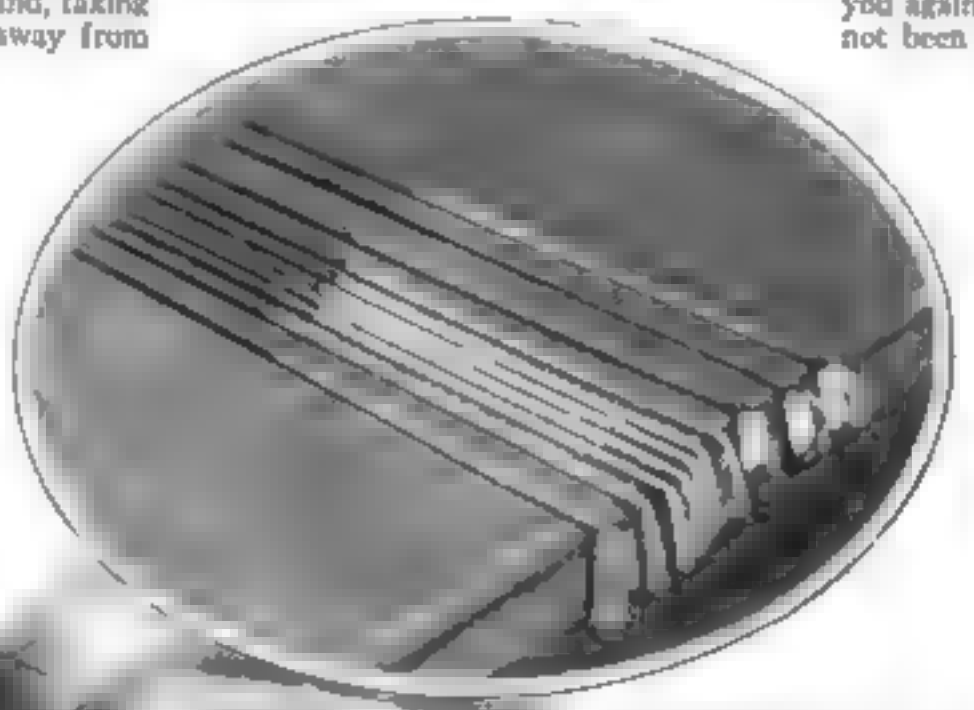

Fig 12 When the grip is completed, it should be rolled between any smooth surface and a block of wood held under the left forearm.

Fig 13 When clubs are to be put away for the winter, they should be stored lying down on some flat surface.

ing some of the minor repairs on golf clubs in your own home workshop, I still warn you against undertaking anything that has not been outlined. Leave the more intricate work to the original manufacturer of the clubs. In most cases the clubs have been put together with the aid of machinery and special tools, and it is futile to attempt to do by hand what can be accomplished only by means of the manufacturer's special equipment.

The author wishes to express his appreciation to J. G. MacGowan, a New York golf professional, for posing for the photographs used to illustrate this article

---

PORTABLE electric heaters are oftentimes used in bathrooms where it is difficult to prevent water from being splashed on them and discoloring their highly polished copper bowls. To clean them remove the guard, rub the reflector with a rag soaked in ordinary household ammonia, and shine the bowl with a good metal polish. This will restore the brilliancy to any high-grade copper reflector but it will not work on reflectors which are merely sheet iron which has been copperplated.—FRANK FROST

Planking Our Outboard Racer

How the sides, bottom, and deck are fastened—Cockpit and floor boards—The concluding article

By
WILLIAM JACKSON

IF THE throb and the r s of a high-speed motorboat stir your blood and you long to experience the thrill of driving your own outboard racer, you cannot do better than to build the 11 ft boat illustrated. It is exceptionally speedy, quite safe and stable, simple in construction, and relatively inexpensive. The original hull cost the writer only $25 for materials.

Some of those who read last month's article on the framing of the hull (P.S.M., Mar '31 p 91) probably have the work well under way by this time. others who missed that article may begin now by looking up a copy of the March issue or by sending for POPULAR SCIENCE MONTHLY Blueprints Nos 128 and 129 which contain the complete working drawings and a list of the materials required (see page 117).

After the framework has been completed as far as described last month, you ready to attach the side planks. First, coat the chine, the inwale and the outside edge of the tailboard with glue. Apply strips of cloth along the glued sections, and clamp the plank to the side. Screw the plank with every care to each frame with 1-in. No. 6 screws, spaced about 2 in. apart. Use a double row of screws on the tailboard. For the time being use two screws between frames to fasten plank to chine. When the step is cut out and the edge along the chine is trimmed, complete the fastening of the plank to the chine with 1-in. No. 6 screws, spaced about 2 in. apart. Use 1-in. copper nails about 3 in. apart to fasten the plank to the inwale.

With both sides on, the boat is ready for the bottom planking. The afterstep section is planked first. When removing the clamps from the keel make sure the bottom does not change shape. Cut the bottom planks 7⅛ in. wide.

Place a plank on the center line of the keel, and mark the frames at the outside edge of the plank. Cut notches for the batten strip in the center of this mark, so that the seams between the planks will meet in the center of the batten. Notch the battens halfway into the tailboard. Fasten battens to frames with small nails. Coat the keel, batten, and well and tailboards with glue and lay cloth on the glued surface. Fasten the plank to the keel, chines, and frames with 1-in. No. 6 screws, spaced about 2 in. apart, and nail it along the batten with 1-in. copper nails. Drill lead holes for all nails and screws, and hold an iron underneath to clinch the nails. The whole bottom is fastened in the same manner.

With the boat turned over and after the edge of the planking along the inwales and chines has been trimmed even, the deck beams are fastened to each frame with one ¼ by 1¾ in. carriage bolt. Uprights ¾ by 1½ in. are next fastened to the cockpit frames and to frame No. 5 with two 1¾-in. No. 8 screws. The cockpit railing, which is ¾ by 1½ in., is fastened to the transom and deck beams with one 1¾-in. No. 8 screw. The stringers are fastened to each frame with two 1¾ in. No. 8 screws. Before the deck is applied, paint or varnish the inside.

If one wishes a fabric deck, it can be had by notching ¾ by 1 in. battens halfway into the deck beams, letting them project ½ in. above the deck; they should be spaced 6 in. apart. A good grade of muslin is stretched over the deck and tacked along the sheer. This is treated with three coats of airplane dope, then painted any desired color.

The boat in the illustrations, however, was built with a wood deck, which is heavier but stronger. For the wood deck, battens ¾ by 1¾ in. are notched into the deck beams the proper distance apart for

WHEN A BEARING FLIES... THERE'S NOTHING BUT PERFORMANCE THAT COUNTS!

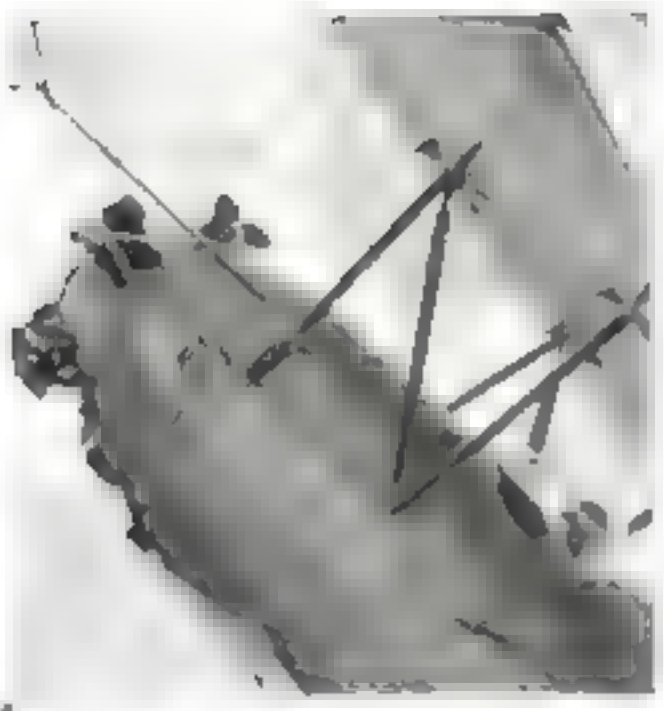

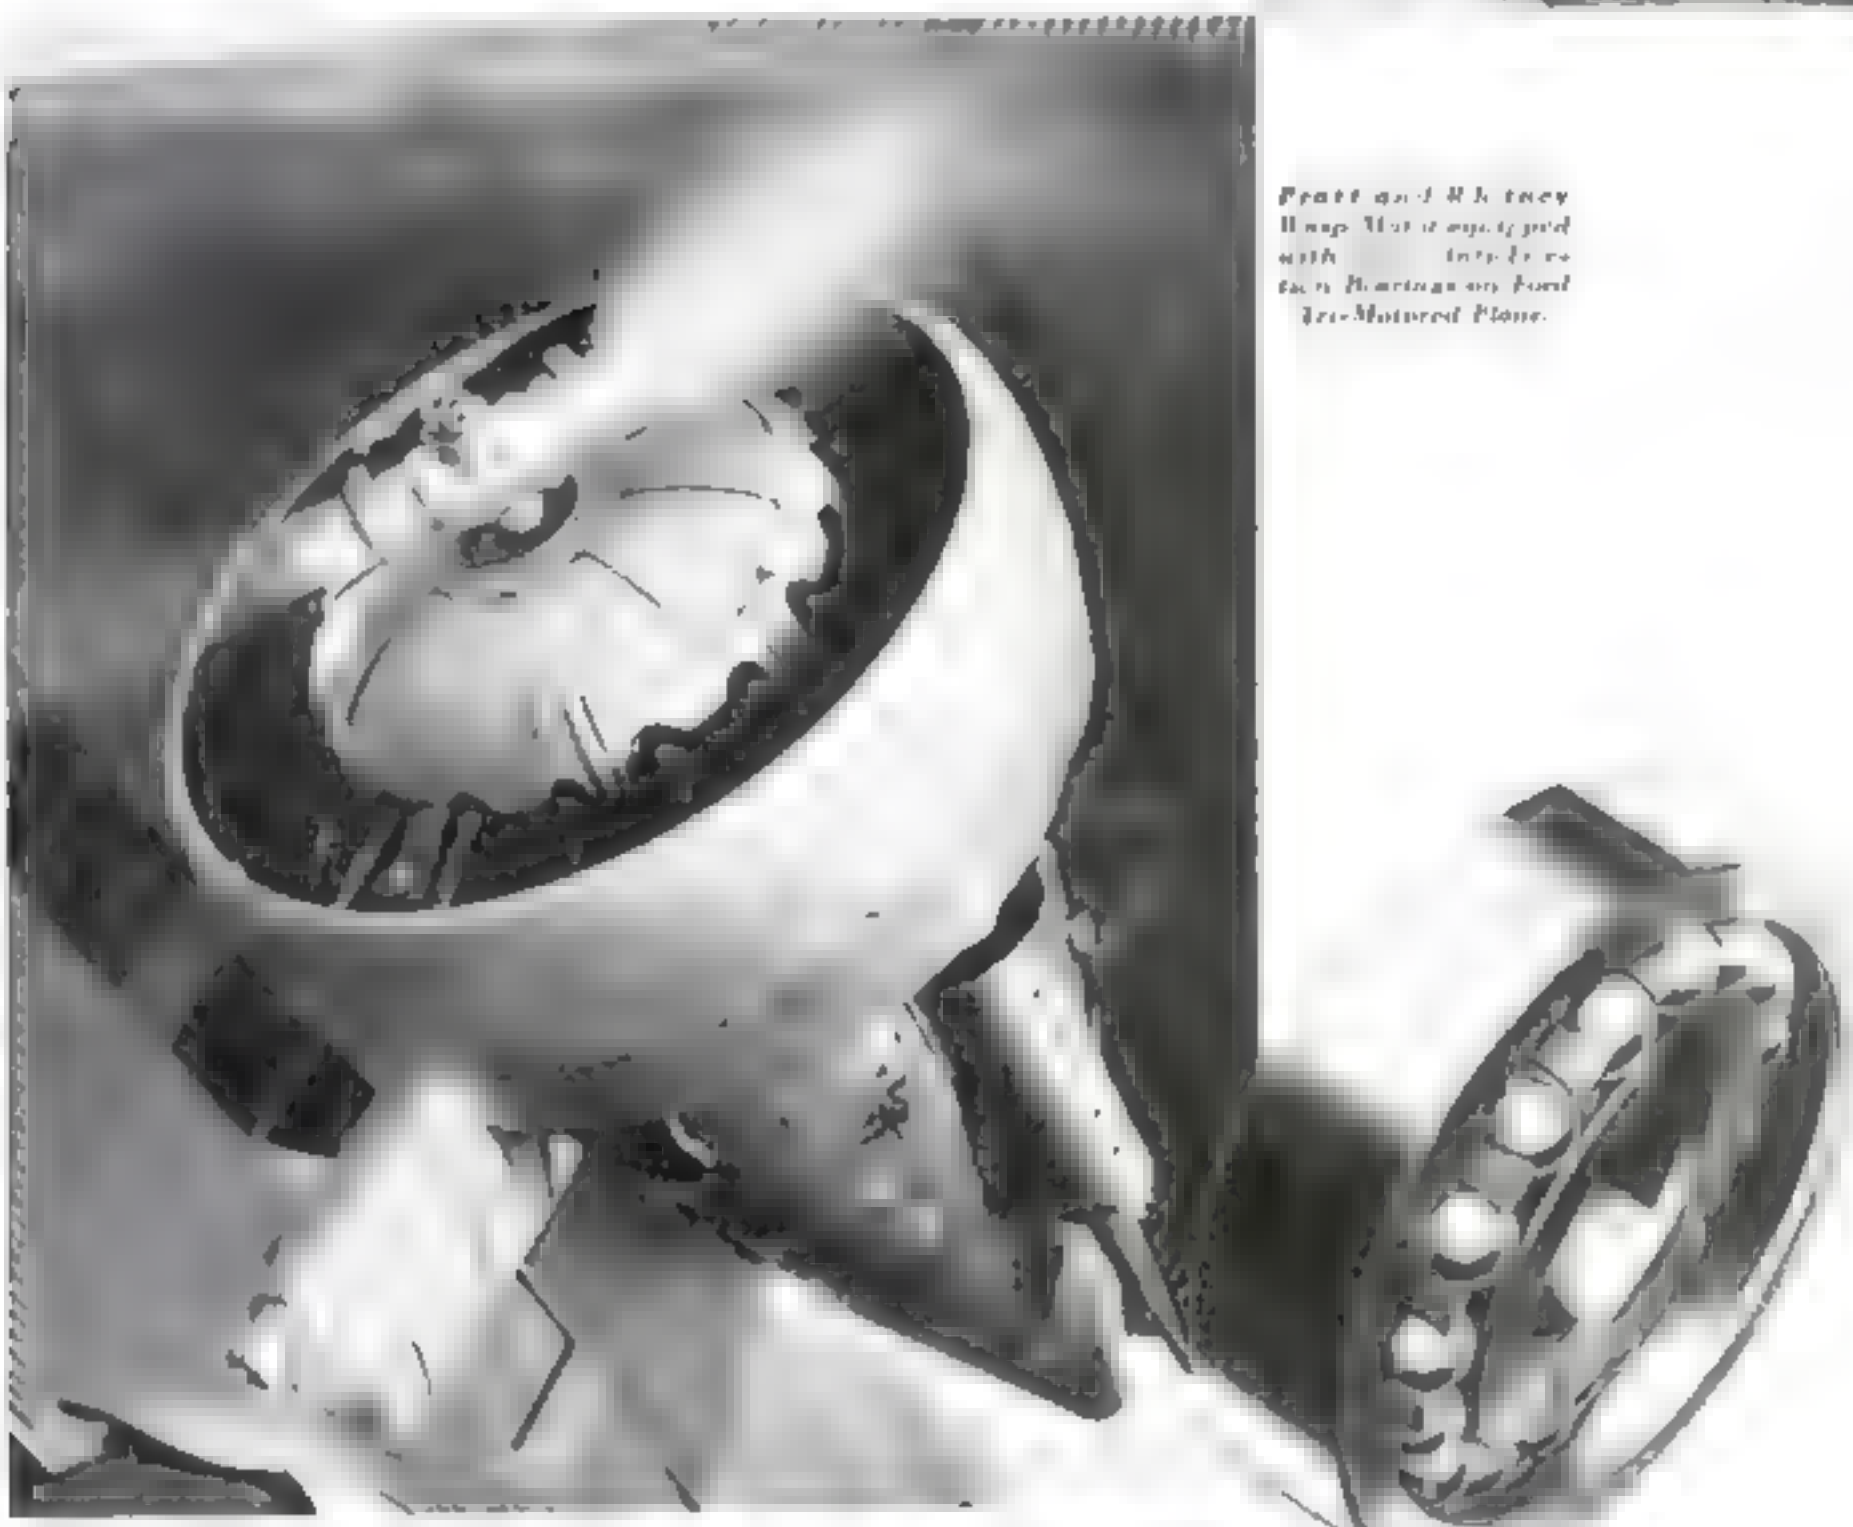

Pratt and Whitney Wasp Motor equipped with SKF Anti-Friction Bearings on Ford Tri-Motored Plane.

● *Every aviator knows that "Nothing is apt to cost so much as a bearing that cost so little."*

Along the skyways . . . where chances are always much too long to take . . . where human lives and the development of a new industry depend upon Performance . . . the bearings invariably are SKF.

Men who plan and build the things that fly do not buy on price. Price alone *means* nothing up where wing-tips brush cloud-tips in passing. Performance is the only thing that counts.

And so today there are more SKF Anti-Friction Bearings in use on aircraft and aircraft equipment than all other makes of bearings combined. **SKF** Industries, Inc., 40 East 34th St., New York, N. Y.

SKF

Ball and Roller Bearings

8654

the decking used. The decking is fastened to the beams with 1-in. No. 6 screws and to the battens with ¾-in. copper nails spaced 3 in. apart.

The cockpit coaming is fastened along the railing with 1-in. No. 6 screws and secured to the transom with three 1¼-in. [illegible] screws.

A sheer molding ⅜ by 1 in. is fastened along the sheer with 1 in. No. 6 screws spaced about 6 in. apart.

Screw the floor boards to the frames with 1-in. No. 6 screws. Bolt the tubular steel braces to the floor board with two ¼ by 2½ in. carriage bolts. Where the braces are fastened together on the floor board, place a wood block underneath the floor board as shown in one of the detail drawings in the previous article, so as to fill the space from the keel to the floor. Drill a hole all the way through the keel and fasten the braces to it with one ¼ by 3 in. carriage bolt.

The author planking the bottom of his boat. Copper nails clinched over on the inside, are used in fastening the planks to the battens, while screws are used along keel, frames, and chines.



When the bottom and sides are completely planked, the boat is turned over and the top decking put in place.

If the hull planks are closely fitted, little or no seam filler is required. However, any seams which need filling can be closed with a good commercial seam compound or calking cotton. About ½ lb. is all that will be needed at the most. In the absence of a commercial composition, mix equal parts of linseed oil and whiting putty and paste white lead; this makes a fair seam filler.

Sandpaper the hull smooth and apply three coats of spar varnish or paint. Even if paint is used, it is well to apply two thin coats of varnish first in order to give the succeeding coats of paint a good foundation.

When the hull is completely finished and steering gear of the desired type has been installed, a fin, approximately 5 by 9 in., is attached 1 in. aft the step. Be careful to secure this fin exactly in the center of the hull. The fin may be purchased from any marine supply company.

Any specific questions in regard to the construction of this boat should be addressed to Mr. Jackson in care of this magazine. Be brief and definite and inclose a stamped, self-addressed envelope.

Novel Toy Pushmobile Boat for Boys Resembles an Outboard Speedster

WHAT boy would not be proud to be the owner of a speedy pushmobile boat? The construction is simple, and as for materials little else than a few scraps of lumber and a few odds and ends of metal are needed.

Select a suitable box about 9 in. deep, 20 in. wide, and 28 in. long. The kind of box that bakeries sometimes use to deliver bread in will serve admirably since the sides are strong and the ends are reenforced with wire and staples.

Next, cut a 10 in. long three-cornered block for the bow post. To this fasten the strips for the sides, bringing them back along the sides of the box and fastening them in place with nails or screws. Additional strips are used to form the deck. If sufficient lumber is not at hand canvas stretched on a wood frame may be used.

The two parts from an old roller skate are then fastened to each end of a piece of 2 by 4 in. lumber. The length of this piece is determined by the width of the box. This is fastened on the bottom, midway between bow and stern.

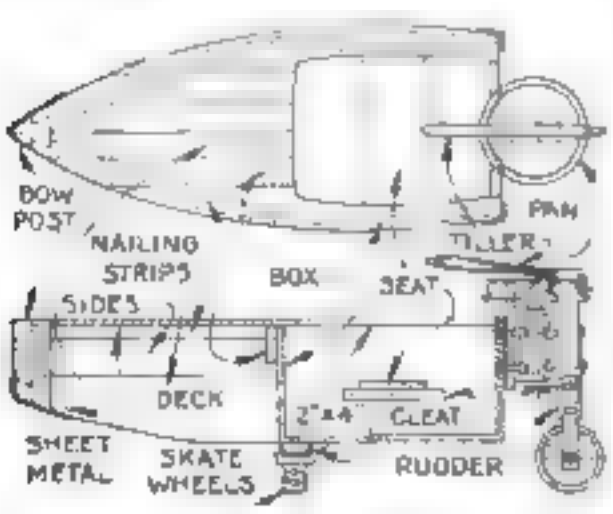

Drawings showing the construction. Notice that a pan is placed on top of the "rudder" to give the appearance of a motor flywheel.

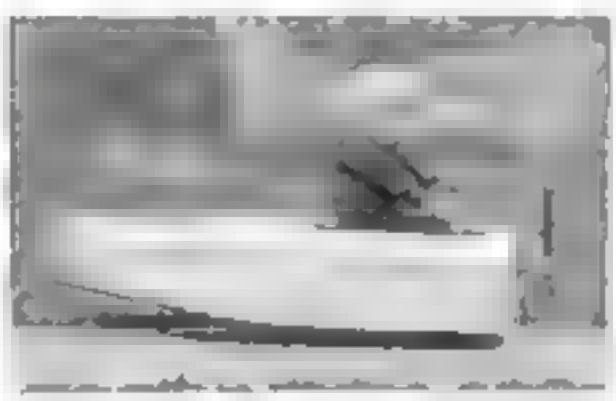

Made from odds and ends, this toy boat will afford small children many hours of safe fun.

In making the "rudder" assembly, take a piece of hardwood 1½ in. square and to one end bolt two pieces of ¼ by 1 in. strap iron to form a fork for the wheel. Fasten the rudderpost to the stern with a hinge made from strap iron or with two sturdy door hinges. An arm made of wood or strap iron is fastened to the top of the "rudderpost" to serve as a "tiller." A tin pan placed on top of the "rudder" will make it look more like a motor.

Paint the pushmobile boat in imitation of the real thing and add an appropriate name or number.—CHARLES M. RICE.

Clear and mellow your pipe
brings in the message . . . .

Dill's Best SINCE 1848 is America's Best

J G DILL COMPANY RICHMOND VA

Twin Lamps in Medicine Cabinet Give Ideal *Shaving Light*

By

WALTER E. BURTON

LIGHT coming through opal-glass windows from two lamps placed in compartments inside this medicine cabinet makes shaving almost a pleasure

You can construct the cabinet of almost any kind of wood from ½ to ¾ in. thick. The corner joints may be glued and nailed or made in any way desired. Rabbet the rear edges of the sidepieces to a depth of about 7/16 in. to receive the ¼-in. plywood back, and fasten the back securely, for it must support the weight of the cabinet

Dimensions are governed largely by your personal needs or tastes. A satisfactory size, measured inside, is 4 by 14 by 18 in. The two compartments for the lights, which are tubular show case lamps of 25-watt size or larger held in porcelain sockets, should be not less than 7 in. long, 2½ in. wide, and 2½ in. deep. The partitions can be plywood or other thin material. Semicylindrical reflectors can be bent as shown from polished aluminum cut from a ten-cent pan.

The shelving arrangement will, of course, have to conform to the inside space not occupied by the lamp compartments. Either glass or plywood shelves may be used

In rabbeting the sidepieces to receive the back, you are to make the cut about 3/16 in. deeper than required for the back alone, if you follow the specifications just given. This creates a space between the rear of the cabinet and the wall so that the flexible fixture wires may be concealed. Wire the lamps in parallel in the usual manner, and place them in series with a toggle switch (various types can be obtained The switch handle should be on the outside of the cabinet, either at the bottom or on one side. It is advisable to bore several ¼-in. holes in the bottom, shelves, and sides to provide ventilation for carrying away the heat from the lamps.

So much for the cabinet itself The really novel part of the arrangement, other than the lamps, is found in the door, which projects about ½ in. beyond the cabinet all around It carries the conventional mirror which, incidentally, should be of plate glass. In addition to the mirror, two 2½ by 4½ in. windows of opal glass are placed so that they will be directly over the lamps when the door is closed. They diffuse the light.

Probably the best door construction is to build a wood frame of ¾ by 1½-in stock with mitered corner joints and insert a plywood panel in the center. In the panel cut two openings to receive the opal windows. Cut the glass slightly larger than the opening and nail a rabbeted picture molding or similar strips around it on the inside of the door. The shaving mirror can be fastened by any convenient means. After hanging the door apply a ball friction catch and a glass knob.

The outside may be finished in any way preferred, but the inside should be painted, enameled, or lacquered white or some light hue. Do not delay the finishing to the last, paint the inside before the electrical equipment is installed, and finish the outside before fastening the glass in place.

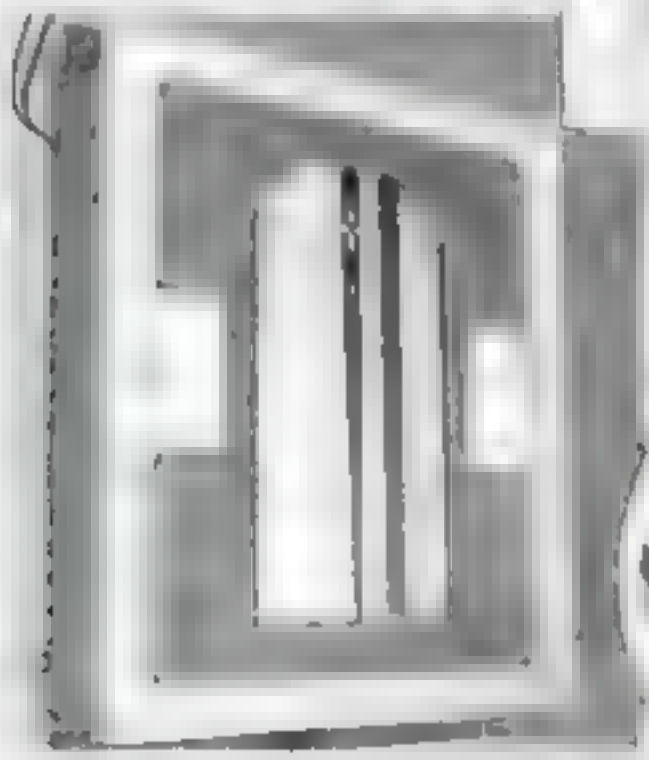

From the windows at each side of the mirror a diffused light falls on the shaver's face.

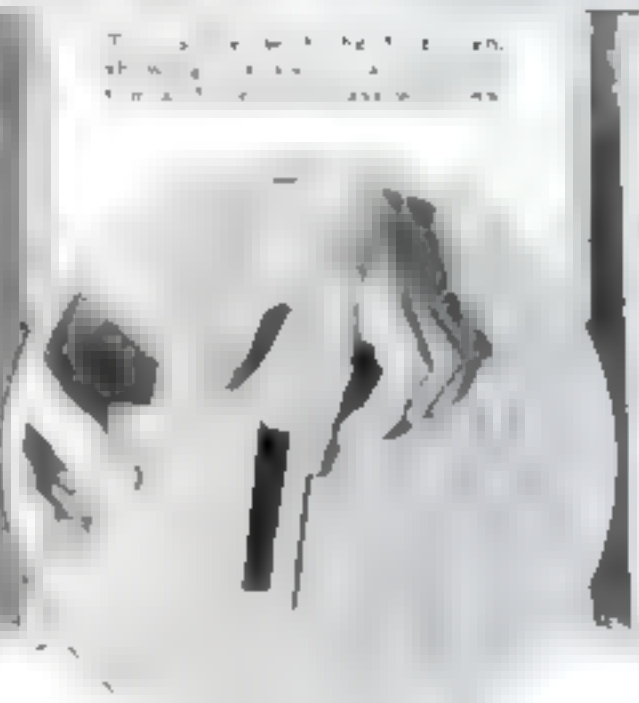

The arrangement of the shelving and the partitions for the two 25-watt show case lamps.

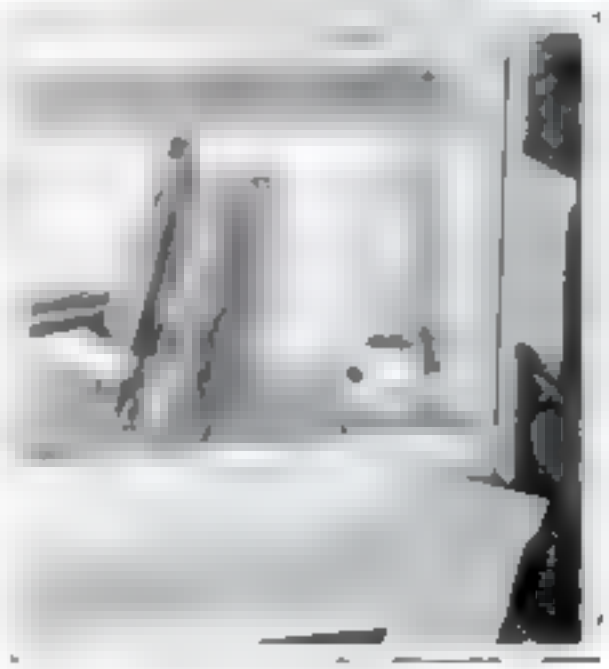

One of the lamps and its aluminum reflector. *In circle* How window is set in door panel.

Speed and Comfort the Face *that's* Fit

Bluff and blustery—these days of mad-cap March. Blow high, blow low—the Face that's Fit *welcomes* wind and weather. And the man who wears the Face starts his day in speed and comfort, with Williams Shaving Service—Williams Shaving Cream and Aqua Velva.

Eagerly he reaches for the "good morning" Williams tube. This old friend gives action in a minute *Lather!* Quick-action lather Mild and cool. Rich and thick Quick to help the keen-edged blade Shave! Down the cheek around the chin, then on the other side. A smooth, clean shave—a smooth, clean face And there is no after-sting—Williams never uses any dyes.

Now the brisk touch of tingling Aqua Velva Dash it over the face You'll like its fresh, bracing fragrance, its knack with the nicks you cannot see. Aqua Velva tones the skin . . . conserves the good-complexion moisture . . . keeps the face as fit all day as Williams lather leaves it

That's the shave in the Williams way. The shave that's smart . . . and *can't* smart. Your face looks and feels—*Fit!*

Once you try Williams Shaving Service, you'll say "Williams" and "good grooming" mean the same thing And a million other men will agree with you!

Have you tried Williams Shaving Liquid! Very quick, very cool, very new. Ask your dealer!

JUST NOTICE THE FINE SKINS OF MEN WHO USE

Williams

SHAVING CREAM—AQUA VELVA

MAIL THIS!

It will show you the way to Face Fitness

THE J B WILLIAMS COMPANY, DEPT PS-80
Glastonbury, Conn.

Canadian Address: 3552 St. Patrick St., Montreal

I am anxious to try Williams Shaving Service. Please send me trial sizes of Williams Shaving Cream and Aqua Velva.

"I'd rather have a Chesterfield"

Only when it comes to taste do cigarettes differ. Chesterfield too is mild, but it is wholly different in taste. A character all its own, say millions of smokers. You will find the change to Chesterfield a *real* change—and a mighty welcome one!

An Expert's Hints on How the Beginner in

Coach Model Making

Can Save Himself Work

By HENRY B. MATTISON

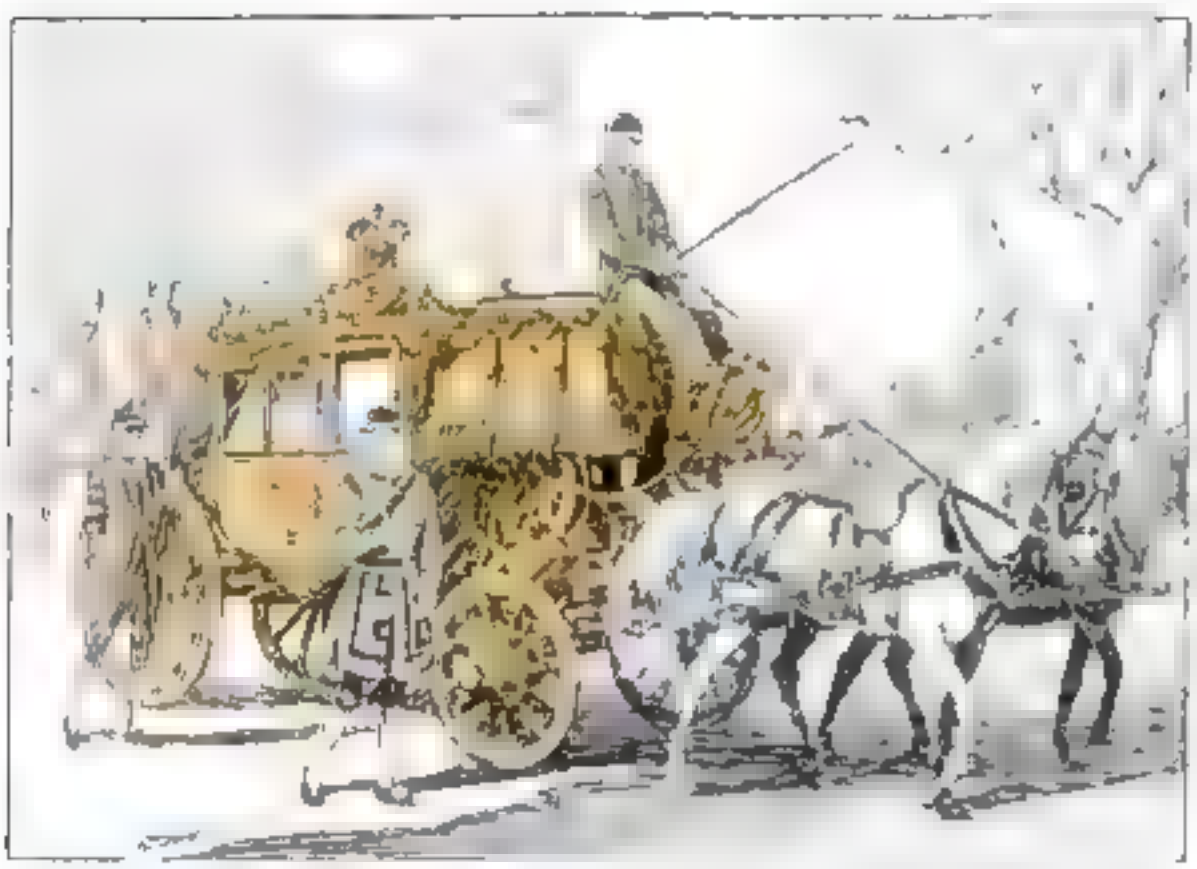

As per entry inside as out.

THE construction of coach models, so popular at the present time, offers many opportunities for the amateur craftsman to exercise his skul. He can simplify his work greatly and at the same time insure more accurate and workmanlike results by using methods and expedients such as those to be described in this article

Although the following suggestions apply primarily to ornate models like the coach of which various details appear in the accompanying photographs, the same ideas can be adapted for use in building most coach models, regardless of their design.

A good-looking coach may be made by carving the six main panels from wood rather than by attempting the built-up construction found in large coach bodies. The sketches at the bottom of page 98 show the first steps in this construction. Notice that the grain of the side and end panels runs horizontally instead of vertically This is to insure strength for the thin sections above the window and doors.

In cutting out the doors, sufficient stock is removed to permit the gluing of a 1/16-in. strip along the sides of the door-hinge and lock pillars to strengthen the thin sections adjoining the windows.

Each panel may be held without injury to its edges by gluing or screwing a small block across its face. In the case of the side and end panels, screws may be used, as they may be inserted in the window opening, which will be removed when the windows are cut out. When working the roof panel, however, glue the block in place to avoid screw holes in the finished roof. After one side of each panel has been finished to your templates, remove the block, fasten it to the opposite side, and complete the carving of the panel

Hot glue is preferred by the writer in assembling the coach body. The assembled body should be sanded and immediately given a coat of thin shellac This should be done promptly as it seals up the pores of the wood and prevents the warping and checking which are almost sure to occur when the body is allowed to stand unprotected even for only a few days. If the finishing is to be done with lacquer, a pyroxylin or lacquer type wood filler is recommended as a base for the lacquer. A porcelainlike finish may be obtained when lacquer is used over this filer

As most coaches had their interiors completely upholstered, the interior decorating offers a considerable problem to the coach builder The pleated designs, however, can be worked over wooden forms. In sewing the upholstering in place over these shaped wooden blocks, the needle usually can be pushed through the wood (especially if balsa) without first drilling the blocks

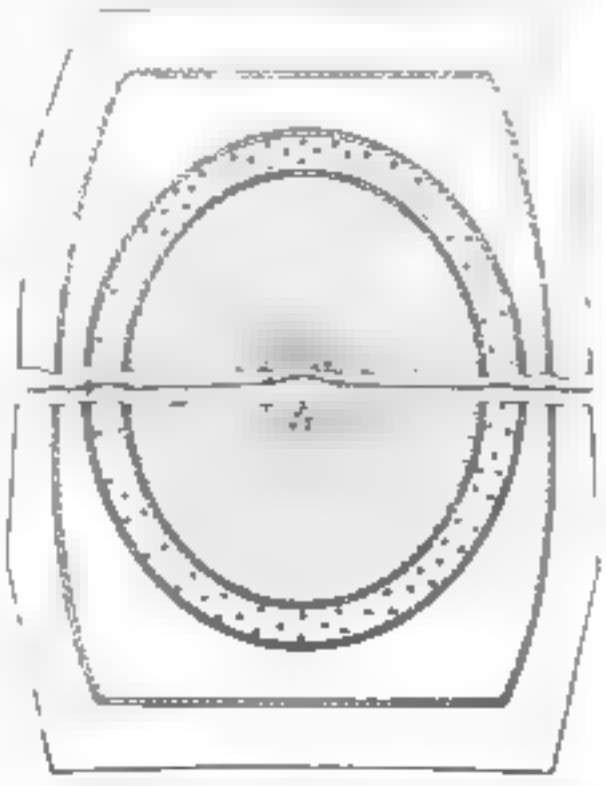

A typical design and cross section of the upholstered head lining (ceiling) for a coach.

Sponge rubber also can be used for the cushion backs. The thread knots in the design serve to shape the rubber to the desired form. Rubber used in this way must be set in a shallow box the size of the bottom of the cushion. Holes should be drilled through the bottom of the box to permit the needle to pass through in sewing

The majority of coaches built for royalty had intricate designs on the ceiling A typical design is shown in one of the accompanying drawings. Since it is of a raised pattern, considerable difficulty was encountered in getting the padding properly placed and making the cloth fit tightly around it without wrinkling. A printer's matrix of papier-mâché was found to make the best foundation. First, a full size ink drawing was made of the design, then a zinc etching was made from this and the "mat" was prepared from the zinc. Any engraver can make the zinc etching and at the same time can direct you to some type foundry or printing plant which will press out a suitable matrix.

Possibly the paper used in making "mats" (obtainable in the stereotyping department of any newspaper) can be worked directly by hand, eliminating the expense of a zinc. This would require a little experimenting, while the first method has proved successful

In covering panels and designs, use a thin, fine material. You will find that

Two views of the running gear of the miniature coach shown in the photograph on page 97. That at the right is the assembly as seen from in front, the one below is a rear view which also shows the tonneau block.

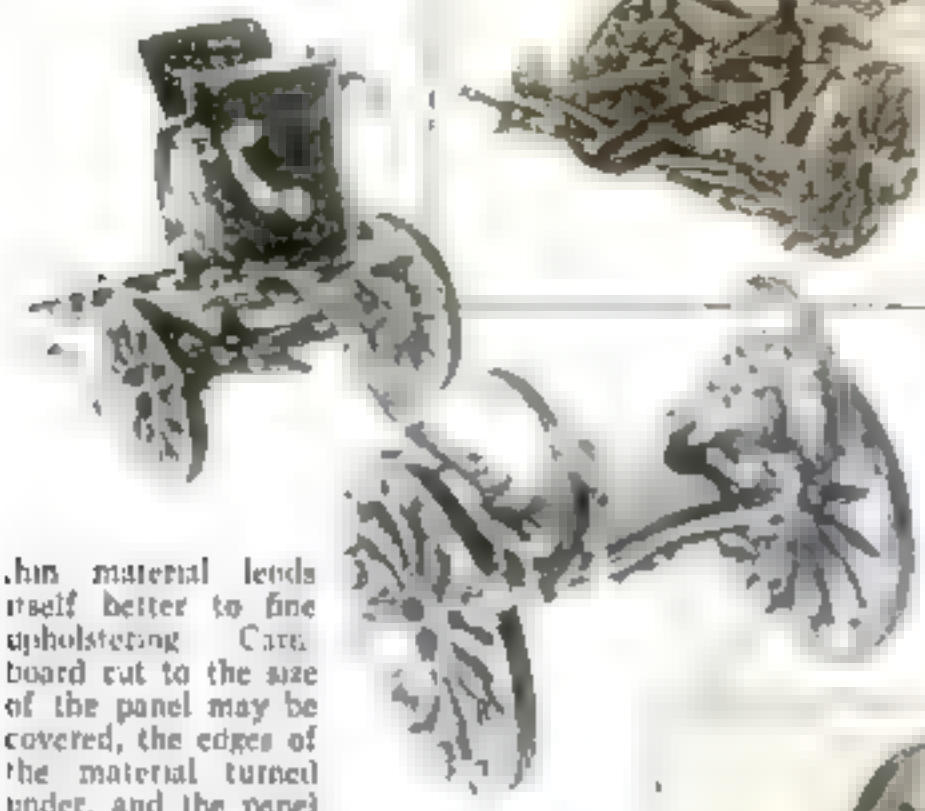

Only the expert model maker knows how essential it is to take pains with the painting.

The assembled front gear and wheels. Constructing the wheels is an exacting test of mechanical skill.

...hin material lends itself better to fine upholstering. Cardboard cut to the size of the panel may be covered, the edges of the material turned under, and the panel tacked in place. Most coaches have all the panels outlined with a finish bead which will hide the cardboard edges.

The wheels of the coach model, when built up individually, will test the skill of the best of craftsmen. The photographs indicate to what length old-time coach builders went in decorating the finished wheel.

On the model illustrated, the wheels were built up by using six felloe blocks for the rear wheels and five for the front. The spokes were beveled and fitted into recesses in the hubs.

The construction of the wheels probably would discourage the beginning coach maker unless he could find a short cut. As a rule the easiest way to obtain a highly ornamented wheel is by casting it. This requires two patterns, one for the front and one for the rear wheel. The felloe blocks may be made up in sections and assembled to form the pattern, or the entire assembly can be turned from a solid piece of wood. The spokes for each wheel must be exactly the same if they are to fit together neatly. By making a pattern of one spoke for each wheel and casting the necessary number of aluminum spokes, you can reduce this work to a minimum. Don't forget to allow for double shrinkage, one for the pattern and one for the finished wheel.

The hubs should be turned up and glued in place at the center. Allow plenty of stock for turning. No attempt should be made to core the center hole as this can be best drilled out when the castings are being turned. The inside half of the hub is made at least 1 in. longer than called for in the drawings, and this extra stock is used for chucking the finished casting. The design on the felloe shoes, spokes, and the like are, of course, worked into the patterns and are cast in the wheel.

Once the patterns are made, the wheels themselves can be cast in aluminum and turned in a lathe. Next, the designs are brought out by the use of small files, hand chisels, and scrapers, and the wheels are ready for painting.

In making the metal leaves and other designs on the patterns for the wheels, printers' lead slugs may be used. These can be hammered out to the required thickness and the desired design quickly worked into them. Slugs may be used also for such decoration and braces as go on the coach itself, if prepared by the method just described.

Twisted beading offers somewhat of a problem. Copper wire twisted together and set into a half-round groove cut into the body will give the desired effect. This method will require careful filing of all the extra space in the groove with some high-grade commercial preparation.

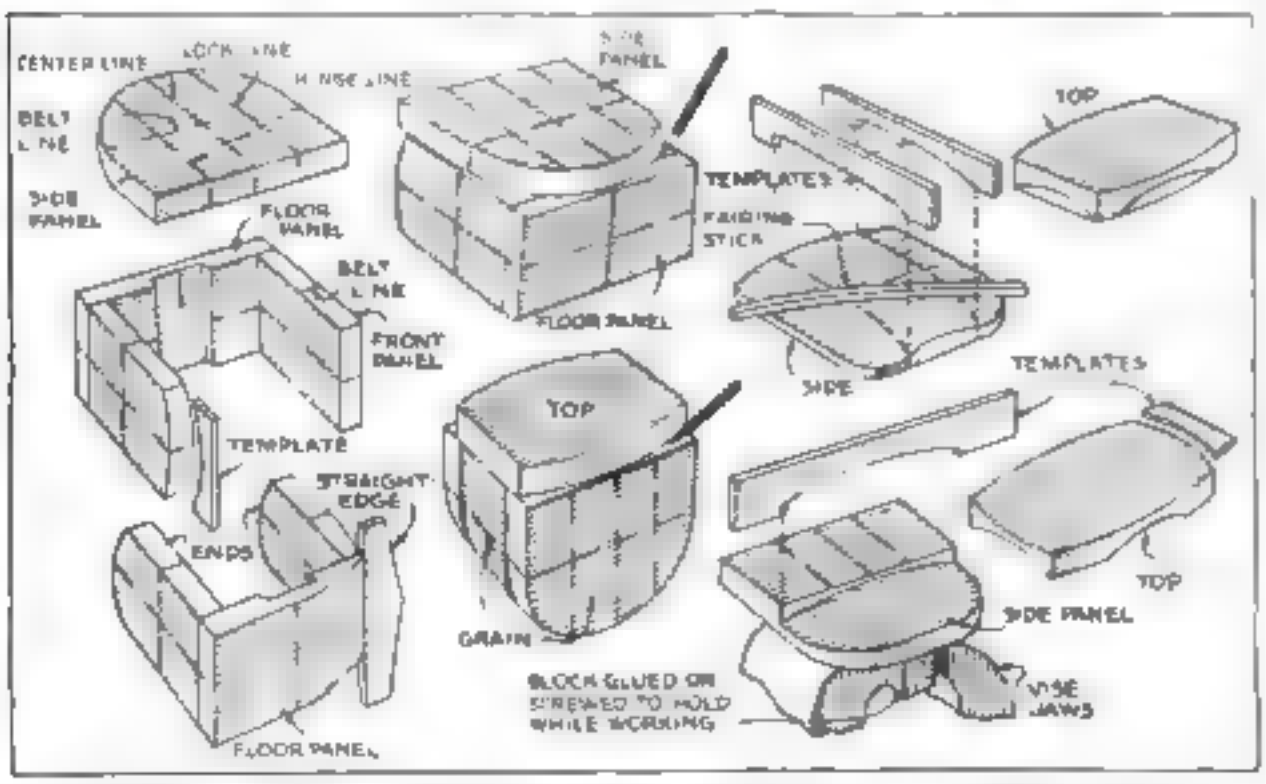

These diagrams show the principle of building up any type of coach model body from six panels, which are cut with the aid of templates made from whatever drawings are being used.

Only $75

for this New, Lightweight Home Movie Camera

Fast Anastigmat Lens assures sharp, clear pictures

IF you're a hobby-minded person, you'll get a tremendous thrill out of a Ciné-Kodak.

Planning your own scenarios. Shooting your own movies. Writing subtitles. Editing film. It's much more than fascinating entertainment. It's a real opportunity for self-expression.

And it's not expensive. Eastman has so simplified the motion picture camera that today the Ciné-Kodak Model M (shown above) can be bought for as little as $75, with carrying case to match. It's the lightest camera ever made for 100 feet of 16 mm film. Comes with *f*.3.5 lens and a special attachment for close-ups.

Aim your camera . . . press a lever and you get crisp, clear movies . . . sparkling with quality . . . alive with action . . . the first time you try. Developing by Eastman experts is included in the price of the film. Your reels come back to you promptly, ready to show in your home.

Stop in at your Ciné-Kodak dealer's and ask him about the $75 Ciné-Kodak Model M. Kodascope projectors as low as $60. You can get a complete outfit, Ciné-Kodak, Kodascope, and screen, for a small down payment and easy terms, if you wish.

What a thrill! There before you on the screen are your own children, laughing and rollicking . . . every smile, every gesture as real as life itself.

Mail coupon for free

HOME MOVIE BOOKLET

Eastman Kodak Company, Rochester, New York

Please send me FREE illustrated booklet telling me how I can easily make my own movies.

Name_____

Street _____

City _____ State _____

P 2.

Ciné-Kodak *Simplest of Home Movie Cameras*

Hints for Repairing Your Car

Fig. 1. How to attach hand crank to old steering wheel and save time in adjusting connecting rod bearings.

Old steering wheel with hand crank attached saves crawling from under car while at work - Welding rod can be used to remove broken axle

POPULAR SCIENCE MONTHLY awards each month a prize of $10, in addition to regular space rates, for the best idea sent in for motorists. This month's prize goes to H. P. Swope, Danville, Pa. (Figure 4). Contributions are requested from all auto mechanics.

MANY jobs around a car make a man wish he could be in two places at once. Adjusting connecting rod bearings is one of them because it is necessary to crawl out from underneath the car every time you want to turn the crank to a different position. Fig. 1, above, shows a simple way to turn the crank and remain under the car. Get an old steering wheel and fasten it to a spare hand crank.

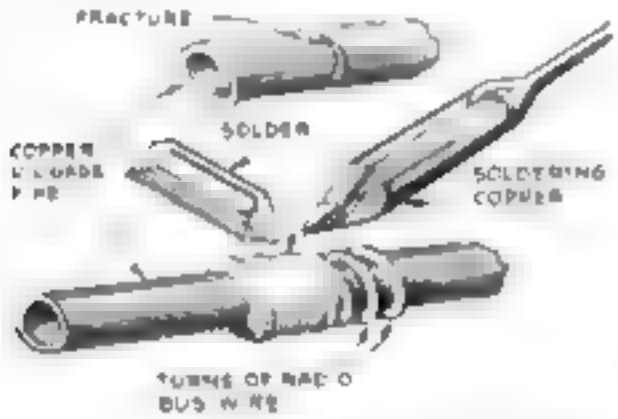

Fig. 7. Leak in pipe line can be repaired by winding wire around pipe and soldering.

PUNCTURES are hard enough to locate without having to spend time doing the job all over again if you happen to loose the place. Fig. 3, below, shows an easy way to prevent "losing" the hole and at the same time deflate the tube. Stick the end of an old oil can spout through the puncture.

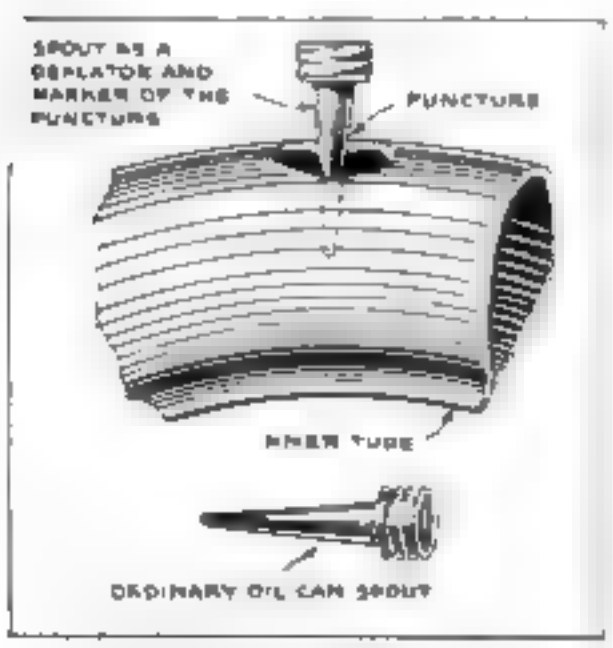

Fig. 3. When a puncture is found in a tire you can keep it located with an oil can spout.

WHEN a valve spring breaks the broken pieces turn into each other and no longer exert any pressure on the end of the valve stem. While the correct cure is replacement, in an emergency an ordinary washer can be used to keep the two portions of the spring apart as shown in Fig. 5, at the right.

FIG. 2, at the left, shows a good way to repair a gasoline or oil pipe line that has sprung a leak or chafed through. First sandpaper the surface of the pipe down to the bright metal for a half inch each side of the leak. Then wind radio bus wire or No. 14 bare copper wire loosely around the pipe to cover the polished portion. Flow solder over the wire and pipe.

WHEN air pressure fails to clear out clogged oil lines try the method shown in

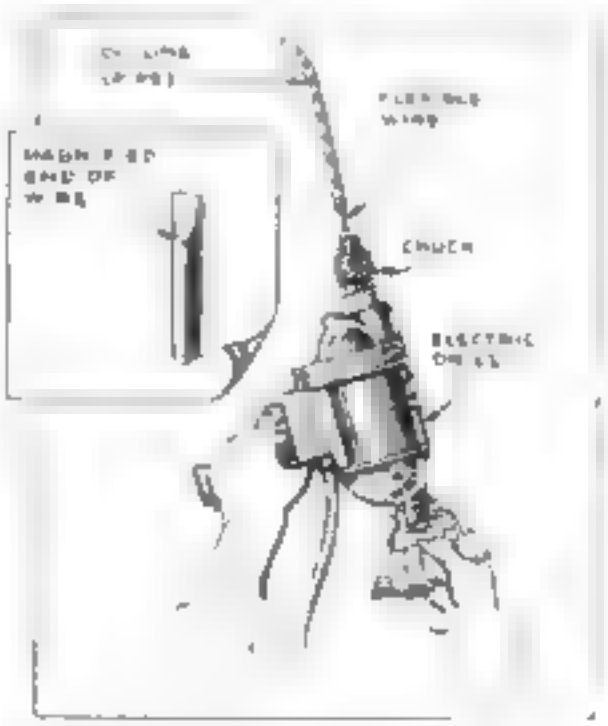

Fig. 4. Clogged oil lines can be cleared by use of a piece of piano wire, with chisel shaped end, inserted and then rotated.

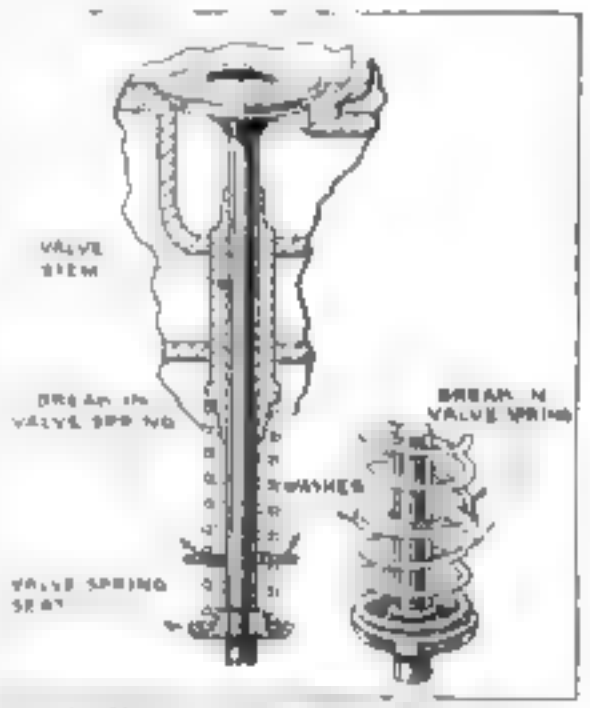

Fig. 5. When a valve spring is broken, it can be repaired temporarily with a washer.

Fig. 4, at the left. Take a piece of flexible wire, preferably piano wire, and grind the end chisel shaped as shown. Stone off the corners to prevent it from cutting into the pipe at the bends and use an electric drill or a hand drill to rotate it.

THE method of removing the remaining portion of a broken axle by means of a "lasso" of wire has been shown in a previous number of POPULAR SCIENCE MONTHLY. In many cases the axle breaks off so short that the "lasso" can't be used. Fig. 6, below, shows a way to weld a rod to the stub so it can be pulled. An arc is drawn and then the welding rod jammed against the axle stub as the switch is opened.

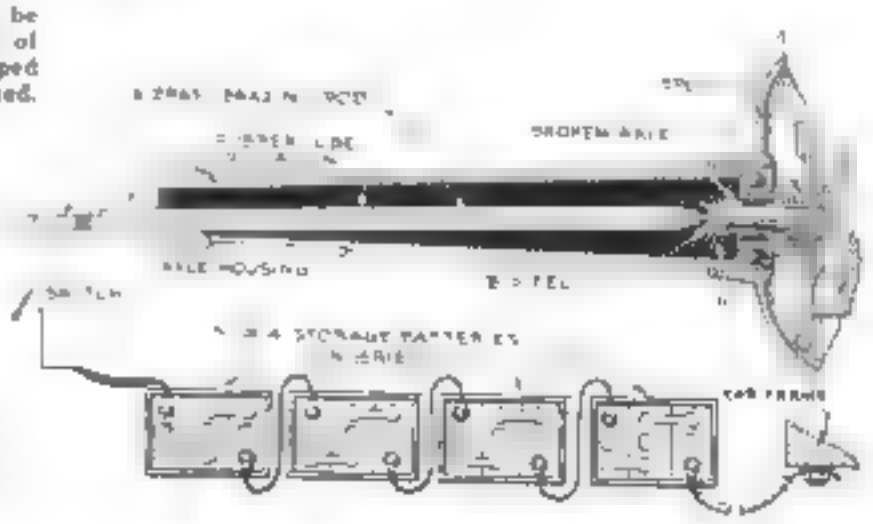

Fig. 6. A rod can be welded to the stub of a broken axle, as shown at the right, and used to pull out the stub.

A NEW BOOK for Tool Users

"THE DISSTON SAW, TOOL, AND FILE MANUAL" • • • SENT FREE

Just out! The most interesting, most helpful book ever offered without charge to tool users. Full of information to make your work with tools better and easier.

Tells how to choose and use circular saws, band saws, hand saws, rip saws, back saws, coping saws, compass saws, etc., and how to sharpen your saws. It shows how to adjust, operate and refit saws for electric home workshop outfits.

This new book also tells and shows how to select the proper files or hack saw blades for any job; how to hold the work; and how to use hack saws and files most efficiently.

It explains the correct way to sharpen and use cabinet scrapers for finishing fine woodwork, and how to use levels, bevels, gauges, squares, etc.

This new Disston book with 229 illustrations is worth dollars to any one who uses tools. The coupon or a post card will bring it promptly.

DISSTON

The World's Foremost Saw Makers

Henry Disston & Sons, Inc., Philadelphia
(In Canada, Henry Disston & Sons, Ltd., Toronto)

Send me the new "Disston Saw, Tool, and File Manual", just published, which tells and shows how to choose, use and care for tools

Name_____

Address_____

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 6.

Old Bill Bends a Big Pipe *and* Does Some Welding

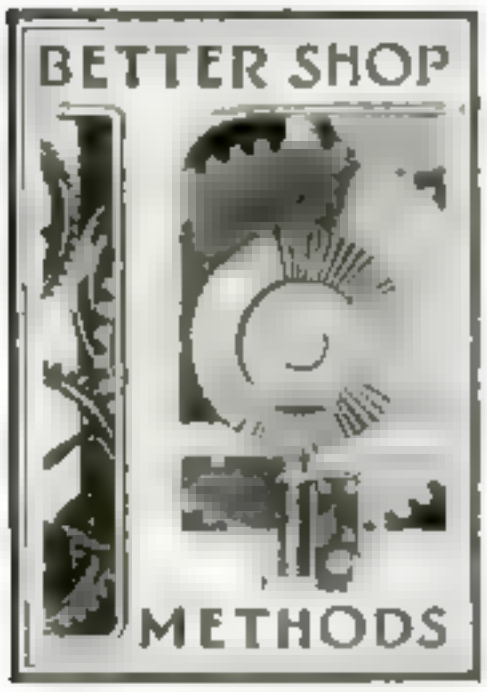

By JAMES ELLIS

As the professor and the boys stood by and watched the two mechanics in the blacksmith shop, Old Bill demonstrated the process, which consisted of heating the pipe, bending it a little, and repeating the steps.

OLD BILL couldn't honestly say he was looking forward to playing host that afternoon but there was no escape. A group of engineering students from the State University would be in shortly to look around. They were making the regular yearly visit to a carefully selected list of shops and factories with the hope of learning something that otherwise could not be taught—just how the country's work was done

Too bad they hadn't picked another time Even a veteran of Old Bill's machine shop experience has his moments of despair and early on the morning of this chilly day he had encountered as hard a problem as any he could recall For a while he thought he had for once spoken too hastily in saying just when he would get the job finished.

Some large cast-iron pipe fittings had broken in the power house of one of the plants in town. No one had been hurt but there were no similar fittings within two hundred miles, and even if they were replaced, exactly the same accident would happen again

Truly, a job to try Old Bill's powers No wonder he sighed at the thought of entertaining visitors. He was still wrestling with the problem and discussing it with the plant superintendent when Professor Robinson and his boys made their appearance

"Good afternoon, Mr Robinson," Old Bill greeted his friend. "I see you have come to look us over again."

"Yes, just a few of us. We drove up this morning, but there are only five of the boys with me, so it will not be such a crowd in the shop."

"I never tire of showing people what we are doing," Old Bill assured him, "especially when it is someone who is really interested and knows what it is all about."

"These boys are genuinely interested in machine shop work, I am sure," the professor returned, "for we have just lately been working hard in a class of machine design, which is something you have to know a great deal about these days."

Old Bill led his little group of visitors out into the shop. He felt that it was just as well to let them look about for themselves at first. After about half an hour, however, the entire group assembled by mutual consent in the blacksmith shop where a large piece of pipe was being bent

"Here is the sort of job that keeps me scheming all the time," Old Bill explained to the professor. "It is not the sort of thing that we can do best, but one of the occasional jobs that we must tackle. We are making that pipe bend because someone failed to look carefully enough into his design a few years ago. This morning some fittings broke at a local steam plant because everything was too rigid and no provision had been made for expansion when the steam heated the piping. The result was an accident that might have injured or killed someone. We are making this bend to give some flexibility to the piping in order to prevent another accident."

Old Bill paused while his mechanics hammered out a buckle that was just beginning to form on the side of the pipe

"This is a method of bending large pipe that we sometimes use," he said, addressing the students. "We do not fill the pipe with sand, but depend on careful control to keep the pipe section round as the work progresses. As you see, the equipment is simple. The pipe is heated with the torch at the point where the bending should be done, and the chain block is taken up a little. Then another portion of the pipe is heated to make more of the bend, and the chain is taken up again. In case there is any flattening or buckling of the pipe, it is carefully hammered out as the work progresses. It may not be as quick as having a furnace for heating the whole bend at one time, but it is a method that can be used in a shop such as this where the equipment is limited."

The students were quick to grasp the details of the method They saw how the pipe was anchored to the floor and supported on blocks so that is was accessible. One of them pointed out that the same procedure could be used if the pipe were on the floor, but that it would not be as convenient to work upon.

"One point worth noticing," Old Bill continued, "is that we heat the outside of the bend hottest, so that the metal will stretch on the outside rather than compress on the inside. In that way we avoid most of the wrinkles."

Not far from where this bending was

Starretts

for your plane

car

Above—Checking propeller blade width with a Starrett Micrometer No. 232.

Left—Setting breaker point with a Starrett Thickness Gage No. 172.

Below—Fine ground cut fillers for small model wheels.

coach-model

Wherever a job requires accurate measurement — whether it's the roof of a house or the balance-staff of a wrist-watch or the wheels of your coach-model — you'll find a Starrett Tool that *seems made-to-order* for it.

Combination Square No. 23 — handiest tool you can have in your kit. Six-inch size $3.80.

Combination Depth Gage and Hook Rule No. 250-H — another handy tool — caliper — depth gage — plain rule — hook rule — handy pocketsize —$2.50.

Pocket Steel Tape No. 840 — graduated in inches and 16ths — nickel plated case — strong, flexible steel ribbon — 36" size $ .75— 120" size $1.90.

Micrometer Caliper No. 224-AA — range 0 to 1" by .0001in.—a general-purpose mike — without ratchet stop $18.00.

There are over 2500 different Starrett Tools. They handle measurements between 0.0001 inches and 100 feet with unfailing accuracy. They handle scores of different *kinds* of measurements.

Send the coupon for a copy of the big Starrett Catalog No. 25 "W", that describes and prices all of these tools, shows how you can use them to do better work *faster*.

Use Starrett Tools

THE L. S. STARRETT CO., ATHOL, MASS.
Please send me my free copy of Starrett Catalog No. 25 "W"
Name .....
Address .....
City ..... State .....

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 8.

being done, a welder was at work making up a steel pipe manifold to take the place of the cast-iron fittings. (These are illustrated in one of the accompanying drawings.) Old Bill pointed them out.

"Those cast-iron fittings are the things that caused the trouble," he said. "They could not stand the overstrain to which they had been subjected, and finally they gave way. We did not have anything to replace them, so we are making up a manifold of steel pipe and welding on steel flanges, which will be a better job."

"Do you have to use the electric welder to make a joint like that?" one of the students asked.

"No," Old Bill replied. "You could use either an electric weld or a gas weld for steel pipe."

The keenly interested group spent some

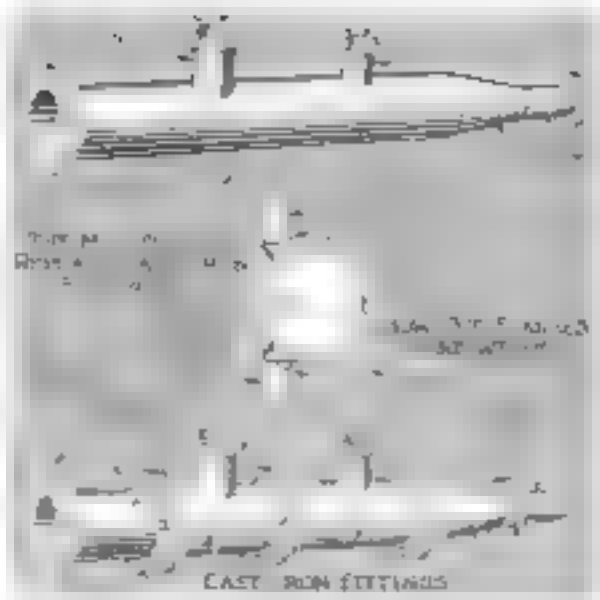

The cast-iron fittings and the welded unit of steel pipe that was made to replace them.

time watching the progress of the work on the new manifold and observing how the steel flanges were being welded in place.

Finally, the tour was at an end. Old Bill felt content, he was satisfied now that his promise about finishing the work in the shop would be kept.

Mr. Robinson said, "I am very glad that we came today, for I don't know when we could have found anything more instructive. I am especially pleased that the boys have seen the welded piping, for I have been telling them lately that that is a very modern development, and I wanted them to see some of it."

"In these times the work goes to the man who can get it out at the best cost, and we have to keep up," was Old Bill's final comment as he waved good-by to his visitors.

Two Low-Cost Methods for Blanking Sheet Metal Parts in Small Lots

How duplicate pieces can be shaped quickly and inexpensively in the shop having only limited equipment

By HENRY SIMON

Work used with the [illegible] in Fig. 2, the [illegible]

WHILE sheet metal parts often may be economically blanked in small quantities by using a dividing or milling machine as described last month (P.S.M., Mar. '31, p. 106), it will sometimes be found that grinding is a better way of producing the final shape than milling.

The shapes suitable for grinding are those which require the removal of a small amount of metal and do not call for very sharp corners, like the examples at *A*, Fig. 1. Grinding is an excellent way to finish fluted or shaped parts.

The secret of success with such form-grinding lies in being able to dress the wheel quickly and with dependable accuracy. A simple tool for doing this is illustrated at *B*. A regulation diamond tool *a* is clamped in a cast-iron stand *b* so as to bring the point of the diamond and the point of the foot of the stand exactly in line vertically. The wheel template *c*, shown in detail at *C*, is made from soft steel to the accurate wheel form desired, and is clamped in the T-slot of the grinder table ahead of the vise that holds the work. To trim the wheel, the table is run forward and raised to where the diamond point is horizontally about in line with the wheel center as at *D*. All that is necessary then is to run the trimmer along the template.

The wheel can be retrimmed with the assurance of complete accuracy in a few seconds. It must be remembered, however, that unless the diamond point is exactly in line above the point of the foot as shown at *E* and the shape of both is precisely alike, the result cannot be correct. A try-square should be used to adjust and set the diamond point as at *F*.

It goes without saying that no sharper corner than the radius of the diamond point can be produced. On the other hand, so long as these conditions are fulfilled and the trimmer is held down flat, no special care is needed in guiding it.

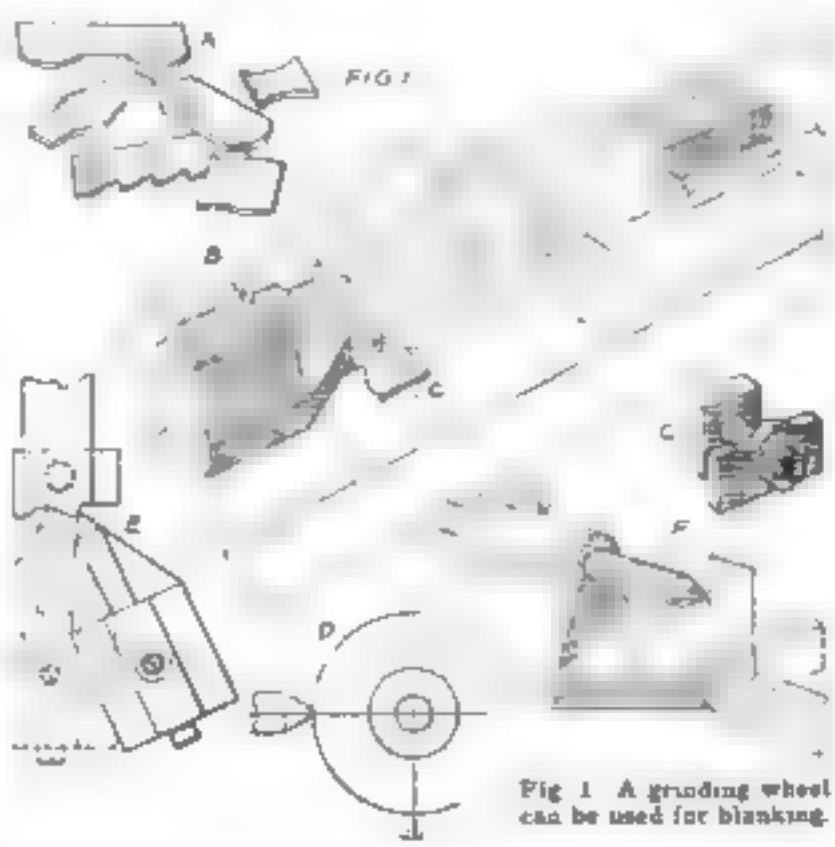

Fig. 1. A grinding wheel can be used for blanking.

With all the methods heretofore outlined, there still remains a large demand for a regular punch and die so cheap to make that it will pay to make them for even a few hundred pieces. And it can be done, provided the parts are of thin metal and are not harder than a mild sheet steel.

A set of tools of this kind is shown in Fig. 2. The remarkable thing about it is that both the punch and the die are themselves made of sheet metal, the thickness varying according to the work required of them. A good material is "ground flat stock," which is a flat tool steel sold by several large toolmakers ready ground to size in any thickness up to ¼ in. and in different widths up to 6 in.

The die *a* is a piece of stock of generous length lying flat upon a surface block to

A Recognized Standard of Accuracy!

WHEN a mechanic purchases a Brown & Sharpe Tool he does not demand proofs of its accuracy. He knows that if this tool has measured up to the Brown & Sharpe Standard of Accuracy it has passed tests so rigid that he can have full confidence in it for his daily work.

For over 80 years craftsmen have depended upon Brown & Sharpe Tools for all types of precision measurements. The unqualified acceptance of the Brown & Sharpe Standard of Accuracy by such a group year after year is your assurance of absolutely reliable tools.

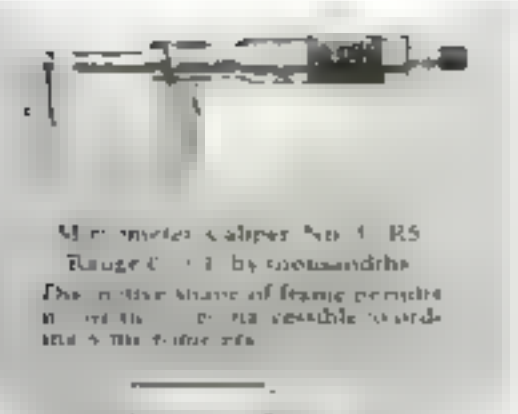

Micrometer Caliper No. 1 BS
Range 0 to 1 by thousandths
The positive action of frame prevents ... the ... possible ... and ... the ... error.

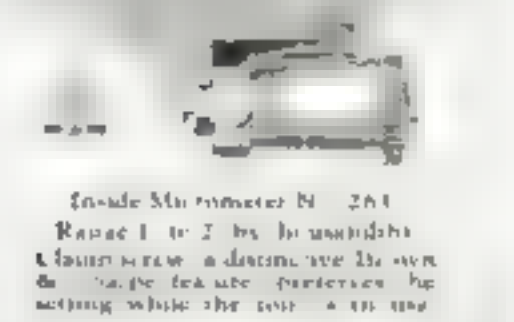

Inside Micrometer No. 284
Range 1 to 2 by thousandths
... screw ... decimal ... over ... range ... parts ... by ... which ... the ... and ...

Universal Surface Gauge
No. 12
... especially ... kind of ... practice ... work

Fillet and Radius Gauge
No. 627
Blades are double ended ... concave and convex radii of same size are on the same blade

American Standard
Wire Gauge
No. 0.5
For gauging sheets, plates and wire of non-ferrous metal.

Here are a few of over 2300 useful Brown & Sharpe Tools. Ask your dealer for a copy of our Small Tool Catalog No. 31 describing the complete line. If he can't supply you, write to us. Dept. P. S., Brown & Sharpe Mfg. Co., Providence, R. I., U. S. A.

Brown & Sharpe Tools

"WORLD'S STANDARD OF ACCURACY"

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 8.

which it is firmly fastened by screws *b* at the rear end only. The forward end protrudes over the front edge of the block to form a handle. Screwed to the die is the sheet metal stripper *c*. The spacer *d* may be either a plain block, as shown, or it may be extended into a stock guide. In metal of any thickness, the check screw *e* prevents the die from being raised more than enough to allow the blank to be knocked out if the pull of the stock on the stripper should be too much for the hand. In that case, a tap with a hammer on the handle frees the punch of the metal.

THE punch *f* is shown in detail at *B*. It is a piece of somewhat thicker flat stock carried on the face of a regular punch holder, from which it is distanced by a roughly shaped soft steel spacer *g*. The die should be given a generous clearance, about 2° to 3° on a side, as shown at *C*. A small die of the same kind made with a flat-stock base and showing all details, is illustrated at *D*.

Dies like this should be used under a screw press only. The right hand works the spindle, while the left operates the die. As the spindle descends, it blanks out the piece and pushes it down upon the surface of the block. As the spindle rises, the die is held down with the hand to prevent it from jumping up under the pull of the metal against the stripper. When the punch is clear of the metal, the die is raised enough to allow the blank to be pushed out with a strip of fiber or sheet metal *h*. It is then allowed to drop back, and the cycle is repeated.

Though the operation is a little slower than punching with regular tools, it is still very fast compared to any other method. On the other hand, the tools are quite inexpensive. Punch, die, and stripper are easily and quickly made. Because there is solid metal all along under the die, the strength of the die is much greater than might be thought.

A convenient thickness for ordinary work is ⅛ in. for the die, and about 3/16 in. for the punch. Contrary to ordinary practice, the die should always be drawn to a purple or blue temper, and from 50° to 75° F. softer than the punch, as indicated at *C*. Ample metal should be left around the hole in the die to prevent bursting and cracking. Clearances are the same as in ordinary die practice, and the work is of the same quality.

This article concludes Mr. Simon's discussion of blanking sheet metal parts.

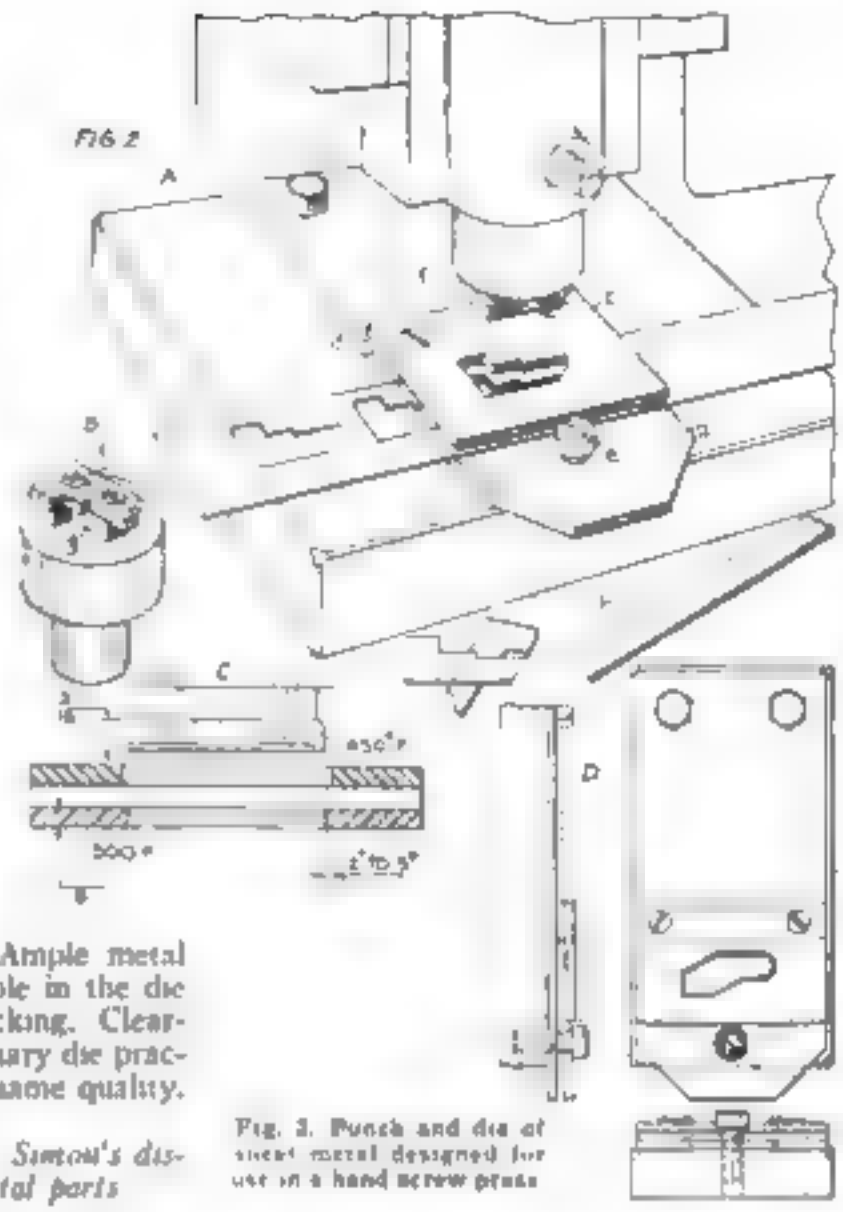

Fig. 3. Punch and die of sheet metal designed for use in a hand screw press

Two Minutes' Shop Talk *with Old Bill*

OLD BILL would like to hear from his readers regarding machine shop kinks that they have found of value. He would prefer short letters of about 300 words, illustrated with sketches or photos. *Popular Science Monthly* will pay $3 for every letter published, with an extra allowance for each photograph used. Address your letters to "Old Bill," *Popular Science Monthly*, 381 Fourth Avenue, New York.

A DISCARDED needle file ground to a three-sided point forms an excellent substitute for a prick punch. In use, place the point on the desired mark and rotate the file between the thumb and forefinger, supplying at the same time a slight downward pressure on the tool.

A hardened steel part should not be struck with a hammer as the lightest blow, if struck along an edge, is liable to fracture it.

If the proper forms are made, an electric hammer can be used as a timesaver in hammering forgings, in welding on the anvil, and in driving home keys and bushings.

The most important job in the shop is of no importance if you are too important to coöperate with others.

When using a tungsten-carbide tool never stop the machine without first disengaging the feed.

In an emergency a cupped set screw will be found to be an excellent substitute for a rivet set.

Glass hardness without brittleness can be obtained on your scraper by heating the tool to a light cherry red, forcing it into a piece of yellow soap, allowing it to remain there until it becomes black, and then completing the quenching in water.

Oxygen and acetylene tanks should be well braced if they are to be used or stored in an upright position.

A good press or drive fit demands that the hole be bored or reamed with painstaking accuracy.

HOW TO MILL SMALL, DEEP CAVITIES ACCURATELY

NEEDLESS spoilage in the construction of die-casting and forging molds can be eliminated if the machinist who is assigned the job understands a few kinks.

Let us say, for example, that it is required to sink a small circular cavity into a die block. A mechanic who is unfamiliar with this type of work will, in most cases, make a special tool that is too nearly the same diameter as the cavity, allowing only for hand finishing after the milling. With this tool in the miller he will try, without any further preparation, to sink the tool in the die only to find that the work on completion is so rough and out-of-round that it is useless.

The first step in work of this kind is to make the special tool considerably less in diameter than the desired final dimension of the cavity. Also, the tool should be stoned after hardening in order to insure a smooth finish on the work. Set up the die block in the vertical miller so that it can be revolved; then carefully center the cavity to be milled, and drill a hole smaller than the smallest diameter of the cavity into the block to the desired depth. With this preparation, the form tool, which is less than the finished diameter, can be sunk into the block without difficulty. By revolving the work and using the cutter sideways, it is possible to finish the cavity to the exact diameter.

A small mouth blowpipe can be used to free the cutter of chips.—F. GLOWACZEWSKI.

To find the length of travel when milling a spiral slot, wrap a flexible piece of strip stock of the correct width around the shaft the desired number of turns.

How Crosswell Dove To Earth *at 300 Miles Per Hour*

Bill Crosswell, Curtiss test pilot, flies all kinds of new ships that never flew before. One is the famous "Hell Diver" in which he soared downward for 3½ screaming miles at [illegible] per hour. Not before Crosswell dove at the breakneck speed a thousand and one tons of science poured into the plane that carried the pilot safely. Curtiss designers expect to perform more accurately their part with the aid of the most precise measuring instruments known to modern science. Turning out a terrific dive puts tremendous pressure on all parts of the plane. Even the slightest variance in performance under these trying conditions. For example, in the oval above we see John McCarthy, mechanic in the Curtiss Buffalo Plant, setting the rudder pedal of the "Hell Diver" with a Lufkin Bevel Protractor No. 635. Without absolutely accurate control at such tremendous speed, disaster might come. Lufkin tools do their part in making flying safe.

Lufkin Combination Sets are used in America's most exacting shops because they have so many improved features. These Sets consist of blades with square head or stock, protractor head and center head. The tempered blades are machine divided, markings being most legible. Lufkin Squares have ¼ in. longer bearing surface on the stock, and each surface is ground, polished and lapped. The square head has square and miter faces, and is equipped with level glass and steel scriber. ***The bevel protractor is graduated 90° either way instead of the usual 180°—making it much quicker to read.*** Center head determines the center of all cylindrical work. The arms of the center head, ground to equal length and ends uniformly machined, greatly increase the range of this tool by making possible accurate measurement on work of large diameter. The Combination Set has more applications in use than any other tool made for mechanics. ***You can tell a Lufkin at a glance by the distinctive color of the enameled parts—a handsome olive green.***

Top Left —Skeleton fuselage of famous Curtiss "Hell Diver" receiving its installation in final assembly line.

Top Right —Curtiss "Hell Diver" in the air, Bill Crosswell at the controls.

Oval —John McCarthy, Curtiss mechanic, setting rudder pedal of the "Hell Diver" with a Lufkin Bevel Protractor.

For accuracy, improved design and construction, finer finish and balance—demand

LUFKIN PRECISION TOOLS

THE LUFKIN RULE CO. SAGINAW, MICH.

106 LAFAYETTE STREET, NEW YORK
and WINDSOR, ONTARIO

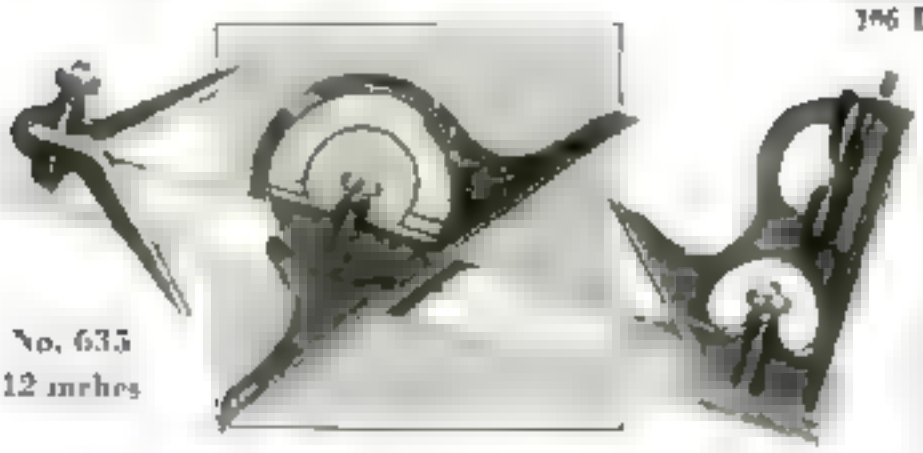

No. 635
12 inches

Send for this FREE CATALOG

[illegible] pages and 50 valuable tables of decimal equivalents [illegible] Standard Drill Sizes [illegible] Wire Gage [illegible] Depth of Threads [illegible] Length of Standard Taper Pins [illegible] Lufkin Measuring Machine Screws [illegible] Cap Screws [illegible] Square, Flat Head Machine Screws [illegible] Depth Tapping Holes [illegible] Set Screws [illegible] Depth and Tapping Holes [illegible] and practically every other fact tool dic shop requires.

THE LUFKIN RULE CO.,
Dept. D, Saginaw, Mich., U.S.A.

Please send me Lufkin Catalog No. 6.

Name _____

Street _____

City _____ State _____

LUFKIN
MANUFACTURERS FOR OVER 45 YEARS
MEASURING TAPES—RULES—TOOLS

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 6.

How You Can Make Better Joints

with the aid of this book and ATKINS Silver Steel Saws!

If you're not satisfied with your skill in doing joinery, let the author of this new ATKINS Saw Book for Home Craftsmen show you the correct, easy ways to cut and fit wood joints.

He begins with the simple lap and butt types, and then takes up rabbeted, grooved, dado, mitre, mortise and tenon, dowel, dovetail, glue, matched and coped joints. His clear diagrams and step-by-step instructions will soon help you make perfect-fitting joints on any project you may tackle.

ATKINS Panel Saw No. 26 with 10" Silver Steel Blade at $7.50

Silver Steel Circular Saw, of Rip or Cross-cut type, 8" ... $4.75



Ideal for fine accurate, at Atkins No. 4 fleam Sun ... blade $2.50

Joinery is one of many subjects covered in this book. It also deals with starting a shop . . . selecting your tools . . . choosing shop machines . . . building your bench, tool box or cabinet . . . where to get 200 job plans . . . sharpening your saws . . . books for home craftsmen . . . and so on. Finally, you come to fifty pictures of the leading "Silver Steel" Saws and Saw Tools, so you can check up your shop tools, and pick any new ones you need.

This 32-page book costs only a dime but will double your fun in home crafting save your time and improve your work. Thousands of copies sold every week. Send the

E. C. ATKINS and Company
402 So. Illinois St.
Indianapolis, Ind.

Enclosed a dime for ...

Name ...
Street ...
City ... State ...
My dealer is ...

A Multiple Bird House

to which you can add as many little one-family apartments as you find necessary

By JOHN C. WORKLEY

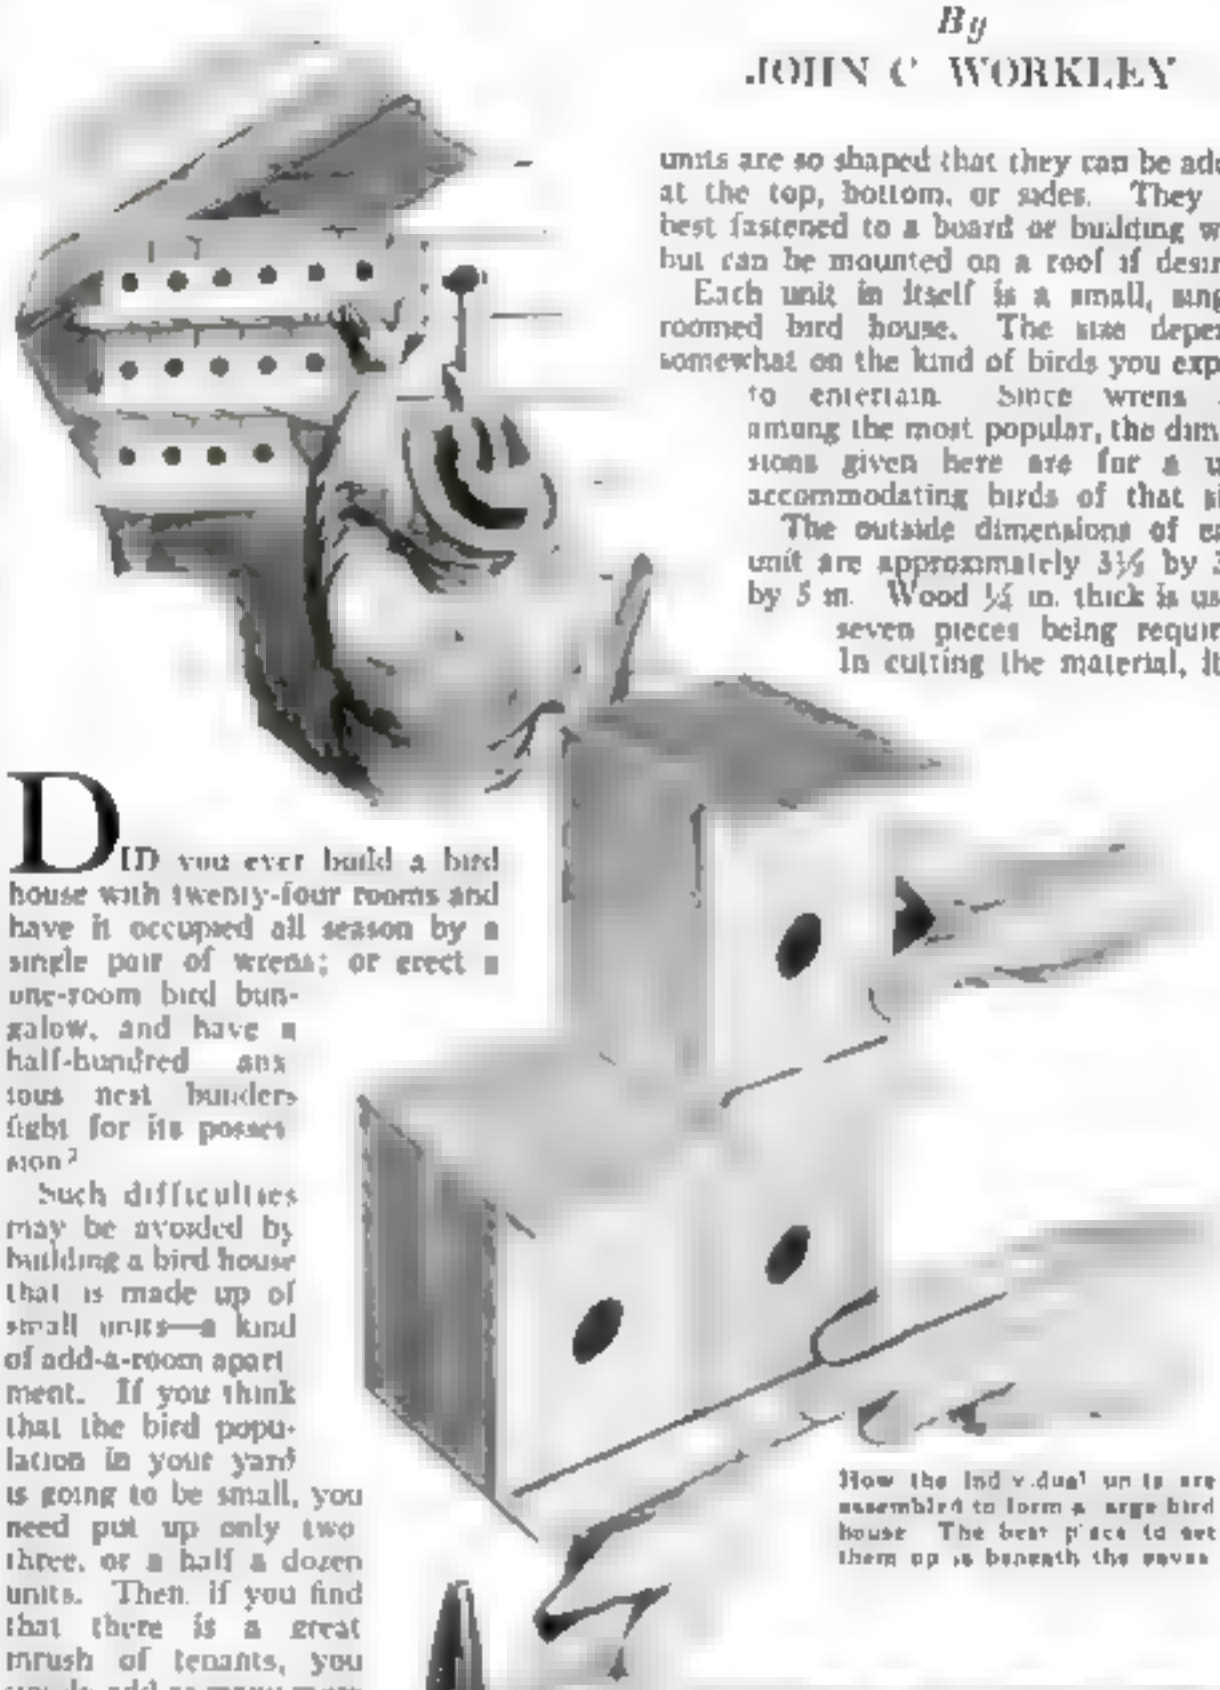

DID you ever build a bird house with twenty-four rooms and have it occupied all season by a single pair of wrens; or erect a one-room bird bungalow, and have a half-hundred anxious nest hunters fight for its possession?

Such difficulties may be avoided by building a bird house that is made up of small units—a kind of add-a-room apartment. If you think that the bird population in your yard is going to be small, you need put up only two, three, or a half a dozen units. Then, if you find that there is a great rush of tenants, you simply add as many more units as necessary. The units are so shaped that they can be added at the top, bottom, or sides. They are best fastened to a board or building wall, but can be mounted on a roof if desired.

Each unit in itself is a small, single-roomed bird house. The size depends somewhat on the kind of birds you expect to entertain. Since wrens are among the most popular, the dimensions given here are for a unit accommodating birds of that size.

The outside dimensions of each unit are approximately 3½ by 3½ by 5 in. Wood ½ in. thick is used, seven pieces being required. In cutting the material, it is

How the individual units are assembled to form a large bird house. The best place to set them up is beneath the eaves

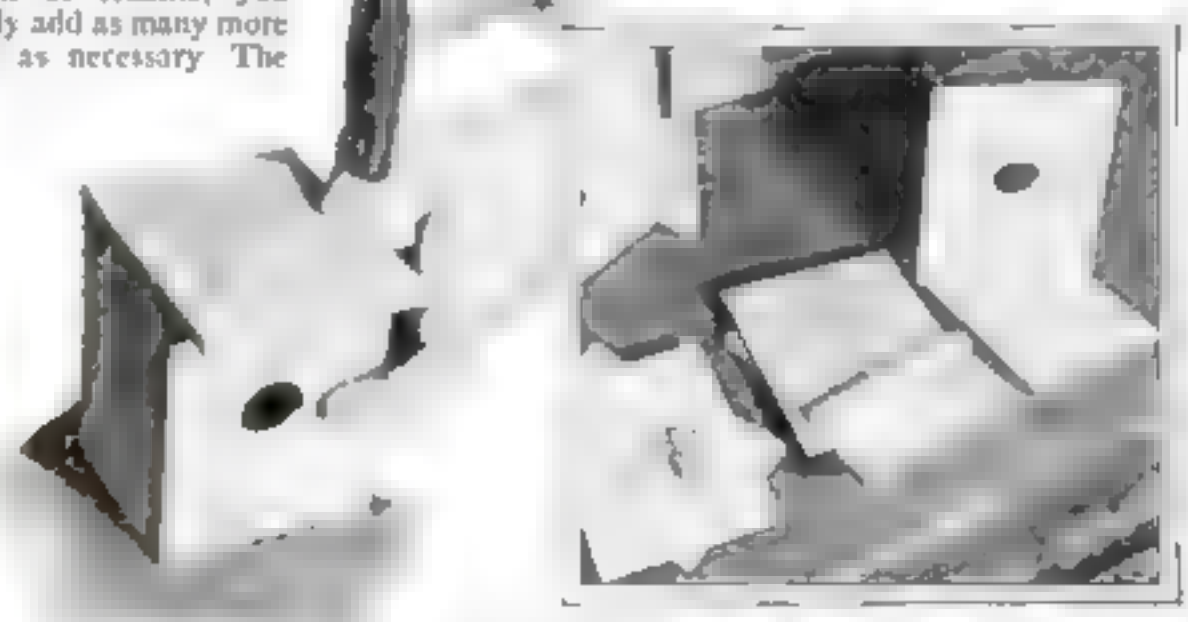

Each unit consists of seven pieces of wood nailed together. The top and bottom pieces are set at a slight downward angle.

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 8.

easier to make enough pieces for a considerable number of units at one time.

The sidepieces are each 3¾ in. wide and 4½ in. long. The front board, which has a 1-in. hole bored about 2¼ in. from the bottom (measured to the center of the hole), is 3½ by 4½ in. The back is 3 by 4½ in., and the top and bottom are 3½ by 4½ in. Both the roof and the bottom slant downward at a slight angle —about 2½°—from the horizontal, the roof so that the water will drain off, and the floor so that one unit can be mounted on top of another. Therefore, in cutting the sidepieces, make the ends on the necessary bevel

Finally you will need a piece 3½ in. long and ½ in. wide, with one edge rounded. Placed along the front edge of the ledge formed by the projecting bottom, this strip provides a convenient perch for the bird residents. The front board with the hole, covers the edges of the two sidepieces; the back is inserted between the sides

Nail the pieces together with small brads, and leave them unfinished. Paint, when used on bird houses, does more harm than good because its odor often keeps birds away

You can fasten the houses to a vertical surface by nails driven at an angle along the edges; or you can mount the units in rows on a roof or a platform surmounting a pole. Usually, however, a sheltered place, such as a point beneath the eaves of a building, is preferable.

DYEING PAPER FOR USE ON MODEL AIRPLANES

MOST model airplane enthusiasts have experienced difficulty in coloring the paper covering of their models. Colored dopes are fairly satisfactory, but they have a tendency to show streaks.

I pour hot water into a large tray to a depth of about ¼ in. and dissolve in it some ordinary household dye of the desired color Then I float sheets of paper on the surface just long enough to become soaked, afterwards hanging them up to dry with the aid of spring clothespins. The paper is very wrinkled when it is wet, but it dries out all right, and then I iron it flat. It is best to dye long, narrow strips and do a number of them at a time so that they will all be the same shade.—JAMES J. DOYLE, JR.

The paper is colored by floating it in a tray filled with dye

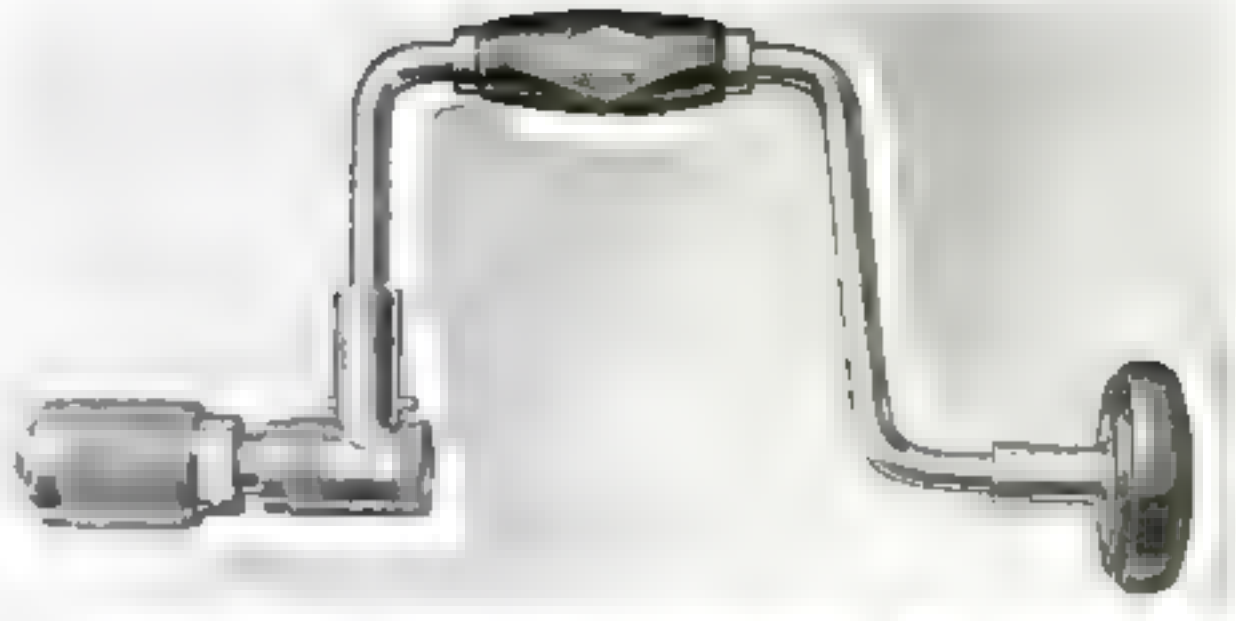

The three types of men that buy this tool

FIRST, the tool lover—mechanic or handyman, who appreciates finish and precision in toolmaking, and takes pride in ownership of fine tools.

Next, the thrifty customer who is careful to put his money into long-run values—insisting that *best* is cheapest in the end.

Then, the ambitious worker who sets up new standards of speed, accuracy, quality, and hunts out the most efficient tools to be had.

And there is a *fourth*, who may be any one of the three: The man who thought he did not need another bit brace —until he saw this "YANKEE" Brace, at his tool dealer's.

No. 2100 Two-jaw. Holds ¼" round; ⅜" square (across corners). Four sizes: 8-, 10-, 12-, 14-inch. Price, 10-inch sweep, $3.20.

"YANKEE" Bit Extension No. 2150

Bit held in socket. No jaws! Nothing to break or jam. Bit can't loosen in work, can't pull out of socket. Fits any brace. Five sizes, 6 inch to 24 inch, $2.45 to $2.40.

—"YANKEE" on the tool you buy means utmost in quality, efficiency and durability.—

North Bros. Mfg. Co., Lehigh Avenue, Philadelphia, U. S. A.

Name

Address

(94)

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 8.

Metal Reaming

more important than ever before

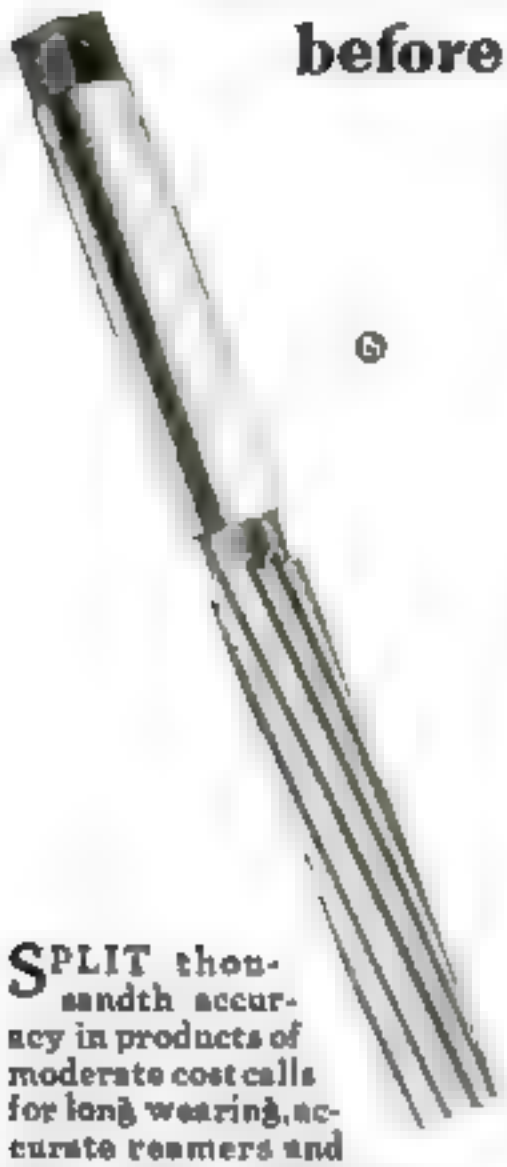

SPLIT thousandth accuracy in products of moderate cost calls for long wearing, accurate reamers and other metal cutting tools.

MORSE tools fill the need. They are accurate, long lived, uniform — conforming in every way to modern production standards.

MORSE
TWIST DRILL & MACHINE COMPANY
NEW BEDFORD, MASS. U.S.A.

A Souvenir watch charm for you

If you will send in the coupon we shall be glad to send you free of charge a miniature MORSE drill watch charm.

Name

Address

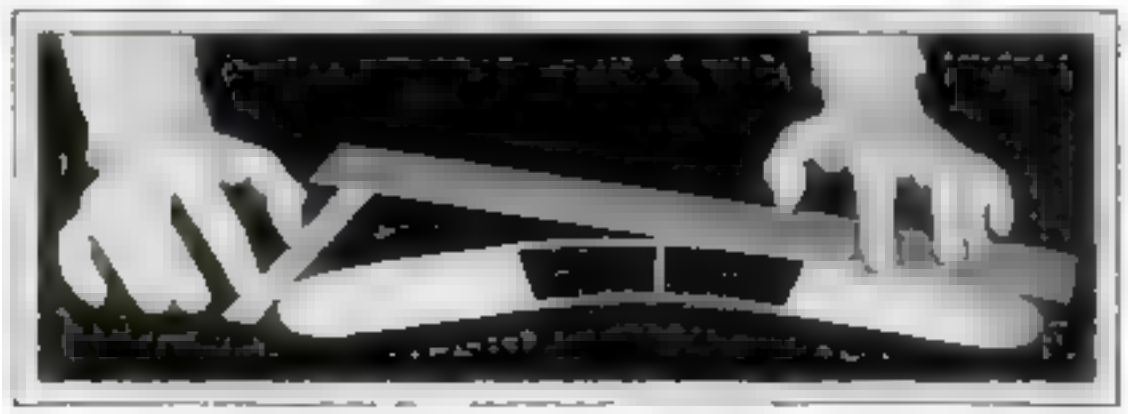

Fig. 1. How a straightedge and a scale are used to measure the sweepback of a model airplane wing. The scale should be at right angles to the straightedge.

Tips on Covering the Wings of Model Planes

By EDWIN T. HAMILTON

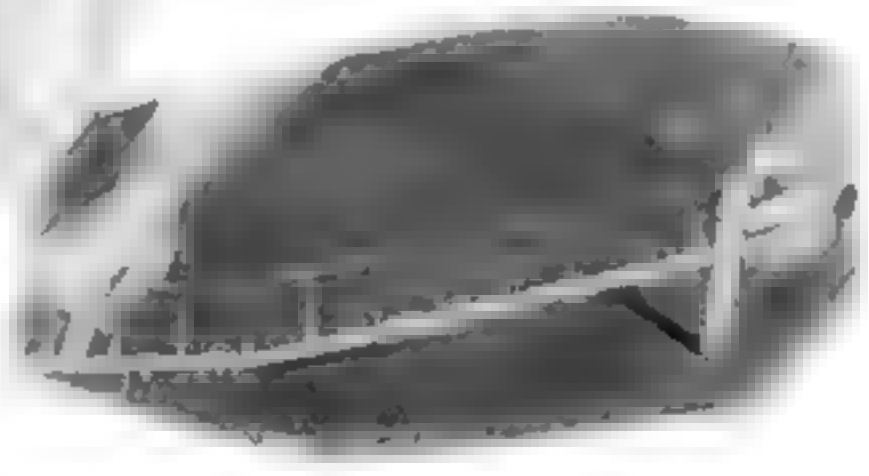

Above Fig. 3. All crepe paper should be ironed smooth before it is applied. *At right* Fig. 2. Measuring the dihedral angle of a wing

IN THE construction of a wing for a model airplane, the builder has from four to seven important steps to consider. These are design, size, camber, dihedral, sweepback, covering and trim. Some wings embody all these points, while others may, or may not, have camber, dihedral, or sweepback.

Any plans from which a wing is built will show these various points, or, in the case of an original design, the builder must decide on them before actual work is started.

Design has to do with the type of frame construction used to gain any desired appearance of a wing after it has been covered. The size refers to the length, width, and thickness of the wing. Camber (also spoken of as "wing camber" or "rib camber," indicates the curve of the wing from its leading edge to its trailing edge.

Dihedral, or "dihedral angle," is usually measured in inches. It is the distance of each wing tip above a level surface upon which the center portion of the wing rests when in flying position. For correct measurement of this distance, both wing tips must register the same height above the imaginary eye.

The term "sweepback" explains itself, inasmuch as it means the distance the wing extends backward from its own leading edge or be[illegible] sweeps back. This is measured from a straight line passing through the leading point of the leading edge and registering an equal distance from both wing tips. The distance must be taken at right angles to this extended line. It is usually given in inches.

The simplest way to understand the construction of a wing is to build one, and with this in mind, the writer will demonstrate each step taken during the construction of one. For completeness, the wing we are about to make will have all seven features in its make-up.

Let us choose one of the many frame constructions given in a previous article on this subject (P. S. M., Feb. '31, p. 116). A close study of the working plans, from which we assume we are working, gives the proper width, length, and thickness of all spars, ribs, and leading and trailing edges. The desired rib camber is shown in the plan of the ribs, so that when they are cut to the proper shape, the

Fig. 4. In covering a double-surface wing, cut the tissue wider than twice the wing width.

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 4.

Fig. 5. Applying dope to the bottoms of the leading and trailing edges, spars, and ribs.

camber for the entire wing is also obtained

Cut all parts to size. When finished, the first three steps—design, size and camber—have been attended to. We now consider dihedral and sweepback. The former can be given the wing after its two halves have been assembled, but the sweepback must be planned before assembly As good construction requires the ribs to run generally parallel to the length of the fuselage it will be seen that if this angle is obtained after assembly, the ribs will appear at an angle with the fuselage, which will greatly mar the appearance of the model

Obtain the sweepback angle with the leading spar first. Measure the sweepback as shown in Fig. 1. Lay a straightedge

Fig. 6. Excess tissue can be trimmed from the wing with an old razor blade.

Fig. 7. In covering a wing, the bottom surface is completed before the top is started.

along one half of the spar with a rule running from the straightedge at right angles, then cement the end of the second half of the spar to the end of the first in such a way that the outer end of the second half will extend from the straightedge a distance (measured on the rule) equal to twice the distance of the given sweepback. Now if you place the center point of the spar on the straightedge and adjust the two ends of the spar so that they register

Character, in tattered arms and massive body, marks the gentle giant of the dyke. So, too, does character endow with friendly life the mellow flavor of

Old Briar
TOBACCO

OLD Briar has one quality that is rarely found in smoking tobaccos. While its fragrance and mildness appeal to the taste of even the comparative novice in the ranks of pipe smokers, it has a relishing sparkle that brings a deep sense of satisfaction to veterans of the briar. This singular character distinguishes it as an exceptional blend and wins friendships that grow more steadfast with every new pipeful.

15 cent size

UNITED STATES TOBACCO COMPANY
RICHMOND, VA., U. S. A.

BUY PROTECTION

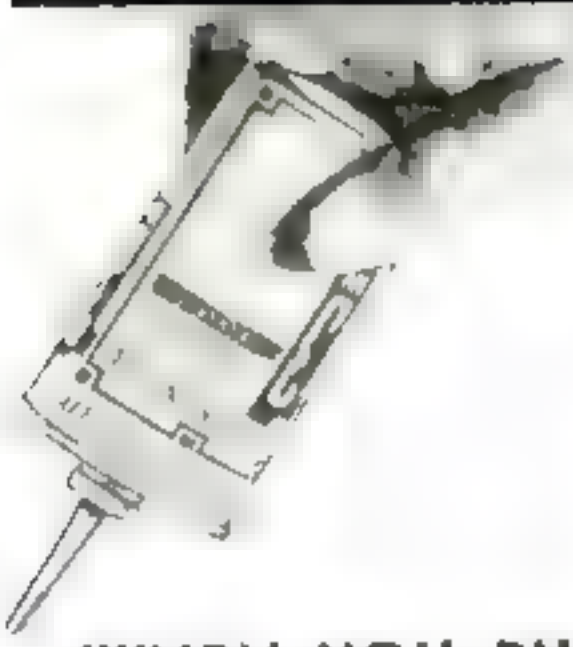

WHEN YOU BUY

OIL . . . .

Ordinary mineral oils often fail down on workshop jobs. Some "gum" very quickly. Some penetrate too slowly. Others give way at high speeds, and leave working parts exposed to wear by friction.

Three-in-One Oil is just right. For it is not an "ordinary" oil, but a scientific blend of *animal*, *mineral* and *vegetable* oils. It penetrates to any friction point instantly. It lasts long without gumming. And every time you use it, 3-in-One Oil does three important things.

It *cleans* that old, dirty oil from bearings and all working parts. It *lubricates*. And it *prevents* both *rust* and *tarnish*. Used regularly in your workshop — on tools, motors and all high-speed equipment — this oil prolongs service; saves many a repair bill.

Three-in-One Oil is sold by all good stores. Both handy cans and bottles. Write now for free sample and "Dictionary of Uses."

THREE-IN-ONE OIL CO., DEPT. 304
130 William Street, New York
Factories, Rahway, N. J. Montreal, Que.

3-in-One Oil

CLEANS - OILS - PROTECTS

Fig. 8. A final trimming can be given the wing with sandpaper after the dope is dry

Below Fig. 9. Sprinkling the tissue with water will cause it to contract and tighten

an equal distance from the straightedge this distance should be exactly the required sweepback

The ribs are next cemented in place and the trailing edge spars cemented to them. If the wing structure calls for wing tips, these should be attached. When the ribs, trailing edge, and tips have been cemented, the joint of the two wing halves should be broken, and the dihedral angle given the wing. Lay one side of the wing on a flat surface and raise the tip of the other side until it registers twice the distance of the given dihedral when measured with a rule held perpendicular to the surface as shown in Fig. 2. After the structure is thoroughly dry, test it again for proper dihedral and sweepback.

Fig. 11. A simple way to obtain the same angle on all the spars

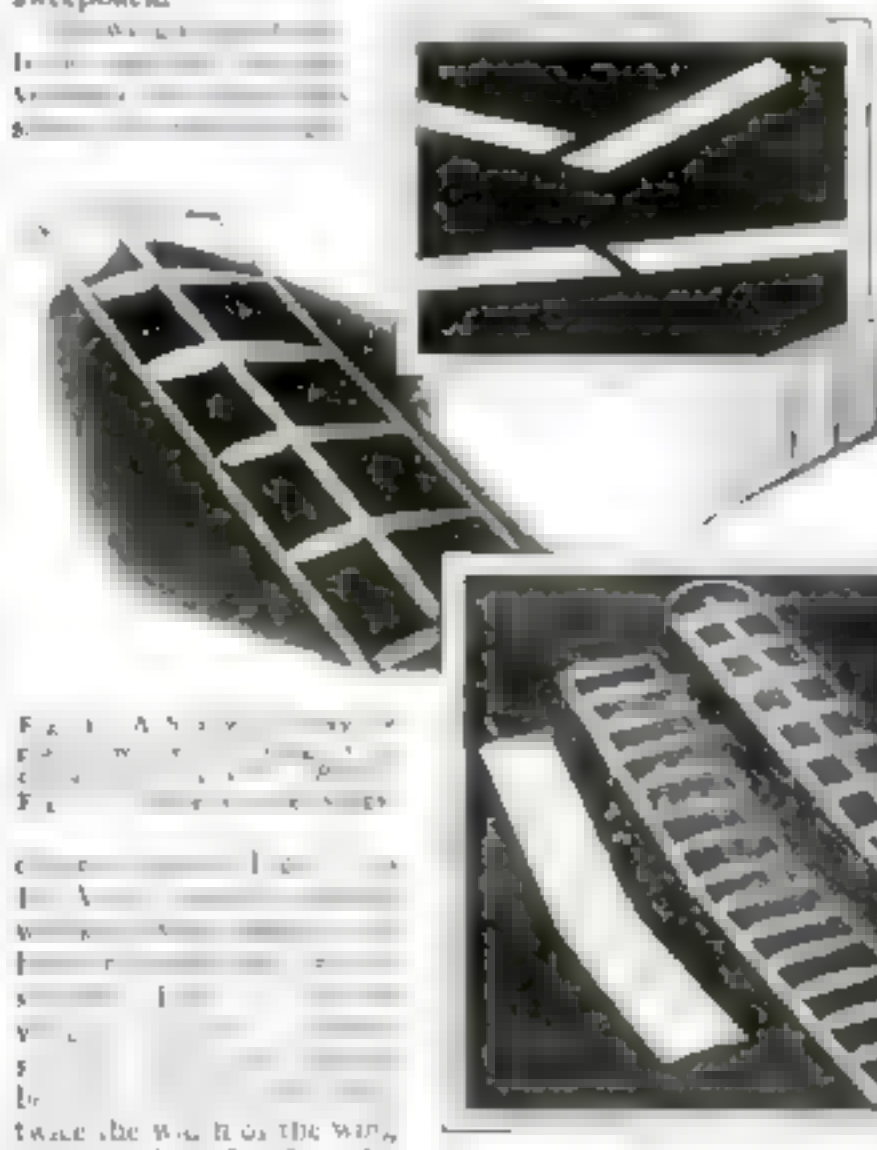

The paper is now placed on a flat surface and the wing laid on it while the ribs and spars are lightly pressed against the paper. Make sure that the paper adheres at all points along the wing.

When the bottom of the wing is covered, the

twice the width of the wing (Fig. 4), but if it is to be covered on one side only, cut the paper slightly wider than the width of the wing. Only one side of the wing is covered at one time, and the paper is so cut as to allow it to lap over the tip, or end.

The third step is to apply clear dope to the underside of the wing along the leading and trailing edges, along its spars if any, and on all edges of its ribs (Fig. 5)

lap while the paper is smoothed and stretched on its upper side (see Fig. 7). The ends are turned over the last rib on each end and held in place with dope.

The excess paper is now trimmed. This can be done with an old razor blade (Fig. 6) or a small pair of nail scissors. When the dope is thoroughly dry, a small piece of sandpaper should be used to trim the

wing properly (Fig. 8). This removes the tissue from the spars and gives the appearance of neat, expert work.

The wing surfaces of light endurance models should not be doped. It will be found that sprinkling the tissue with plain water (Fig. 9) will tighten the surface and give an excellent appearance without adding any weight. On extremely light models where the wing is covered on one side only, even this water treatment should not be given, as the pull produced from shrinking will cause serious warping

As for using dope on such surfaces, only a strong wing construction can withstand the pull from shrinking, and the builder must judge the strength of his wing carefully before attempting such a finish. If the wing is of the necessary strength to allow a coat of thin dope to be applied, the water treatment should be given first, as this will smooth out all creases and allow the builder to flow the dope on the surface much more easily

WHEN the wing is finished it should be carefully tested as shown in Figs 1 and 2. Warping caused by covering and doping often throws the light frame out of line, and any errors must be corrected In Fig. 10 the wing is shown after one half has been covered. Its other side is now covered in the same manner

A simple way to obtain the same angle on all leading trailing, and inner spars is to lay them together and cut through their centers at an angle, as indicated in Fig 11 One cut is made through all spars at the same time; then one member of each pair is turned over as shown, and the parts are cemented together after being measured for correct dihedral or sweepback

Where the wing must come in contact with a strut a heavy rib may be inserted, as shown in Fig. 12 (the third rib from the end). This strengthens the structure at this point and insures it against breaking

A few simple wing structures are shown in Fig. 13 as a guide to the novice. It must be remembered, however, that when constructing any part of a model airplane, no complete set of rules and regulations can be given to cover the work.

In his next article Mr Hamilton will discuss fuselage construction.

WOODEN "WRENCH" TURNS STUBBORN WING NUTS

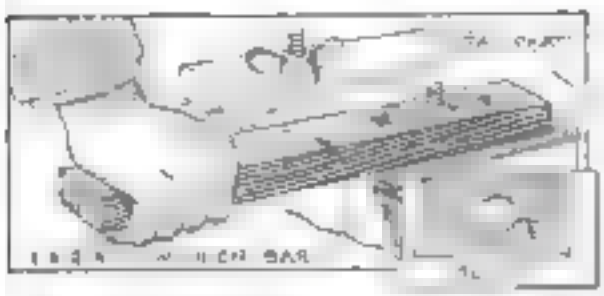

The writer found this wrench particularly useful in loosening pressure cooker nuts.

STUBBORN wing nuts on household appliances can be turned easily with the aid of a wooden "wrench" made as shown. The hole in the stick should be drilled and cut to fit snugly over the wing nut, and the corners at the handle end should be rounded.—W. H. Burrows.

are YOU trying to entertain in a home that doesn't look the part?

Has it seemed to you lately that your friends aren't enjoying their visits as they used to? Have your dinners and bridge parties begun to lose some of their old gaiety and sparkle? Then it's time to look around your house—critically, as you would a stranger's. If your walls and woodwork have become drab, if your furniture is scratched and dull, if your floors are scarred and lusterless, you have the answer without looking farther. You've simply forgotten how sensitive people are to surroundings. Who can be gay in a cheerless room?

With Kyanize Lustaquik Finish you can quickly transform even the least attractive room in your house into a place of distinction and charm. With it you can easily make your home what you desire it to be—the perfect setting for a happy time.

Kyanize Lustaquik Finish is not only easy to apply, but dries dust-free in one hour and hardens in four hours. This beautiful hard-finish enamel, ideal for refinishing furniture, is also popular for giving new life to walls and woodwork. It comes in sixteen beautiful colors to harmonize with any of your decorative schemes, and can be applied equally well to wood, stone, glass, or metal. Kyanize Lustaquik Finish is unquestionably the leader in its field. Boston Varnish Company, 113 Everett Station, Boston, Mass.

BOSTON CHICAGO MONTREAL

There is a Kyanize product for every household use

Write for free booklet, "The Colorful Home," or see your Kyanize dealer today

WOOSTER BRUSHES

Chosen for the Leviathan

IT MEANS MUCH that Wooster Brushes were chosen for the Leviathan, pride of our mercantile fleet. For only the finest brushes obtainable are good enough to maintain the superb beauty of this palatial U. S. liner, largest afloat.

Thousands of master craftsmen use nothing but Wooster Brushes; follow their choice—and you'll make sure of smooth, beautiful painting. Sold at leading paint and hardware stores. You'll know a genuine Wooster stamped Foss-Set, guaranteed use in anything—the bristles can't come out! FOSS SET

THE WOOSTER BRUSH CO
WOOSTER OHIO

Celebrating 80 Years of Brushmaking Progress



WOOSTER BRUSHES

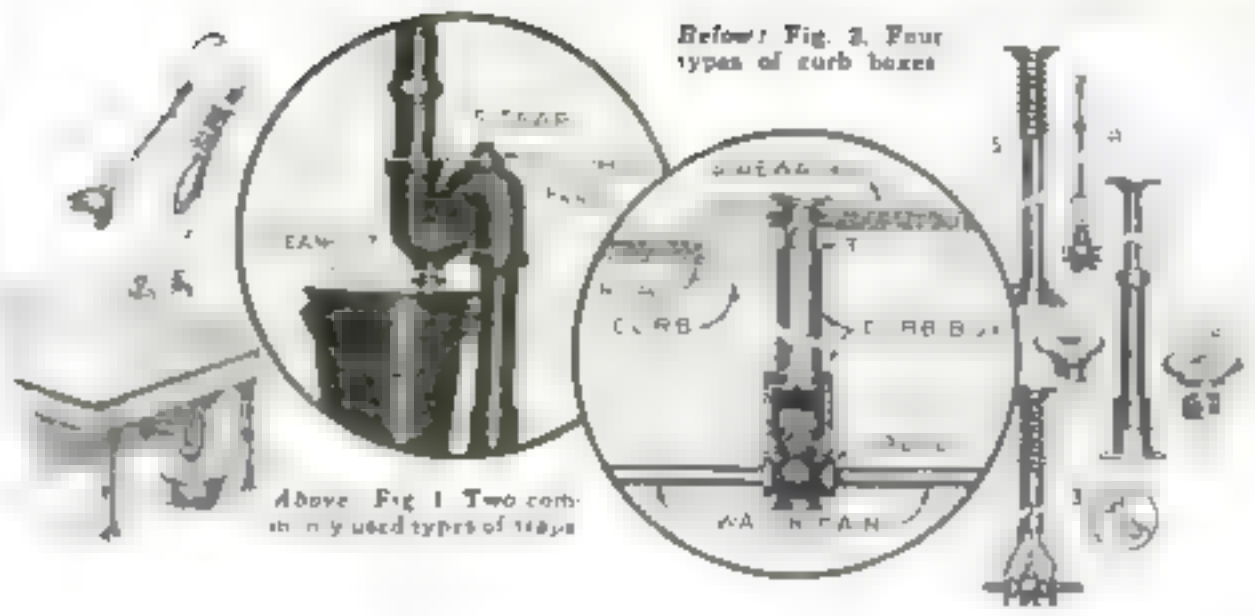

Above: Fig. 1. Two commonly used types of traps

Below: Fig. 2. Four types of curb boxes

Minor Plumbing Troubles *and how to* Overcome Them

THE old adage, "A stitch in time saves nine," can well be applied to the minor plumbing repairs about the house that generally go unattended until more evident and generally more costly—difficulties arise. Small repairs take but little time to make and serious trouble and much expense can often be averted if the home owner will do the job himself at the first sign of trouble. See also P. S. M. Dec. '32, p. 12.

What is the best method of cleaning out a clogged trap under a sink, tub, or basin?

If traps are given a periodic cleaning, they should not become clogged. When however there is a stoppage it is simple enough to clear the passage by the use of a plumber's rubber force cup or suction plunger. First cover the bottom of the sink, tub or basin with about 1 in. of water. Then place the plunger over the drain outlet and work the handle up and down, thus forming a suction and pumping action inside the pipe and trap. Remove the plunger from over the drain after every three or four attempts and allow water to enter the pipe.

In stubborn cases one of the various commercial pipe cleaning solvents may be used. These are obtainable at hardware stores and often from grocers.

If these attempts fail, it will be necessary to clean the trap by means of a wire or a plumber's steel spring clean-out auger. Place a pail under the clean-out hole, remove the plug (Fig. 1). Prod around in both branches of the trap with a 3- or 4-ft. length of heavy wire bent to form a hook at the end, or screw on the flexible auger. Whichever tool you use, remove it from time to time to bring out the waste. When the pipe is clean, replace the plug and flush the drainpipe with water.

What is the chief value of the street valve and curb box from the house owner's viewpoint?

To shut off the water in a serious emergency, especially if a leak should develop between the street and house valves. It is advisable to make a personal inspection of the curb box periodically.

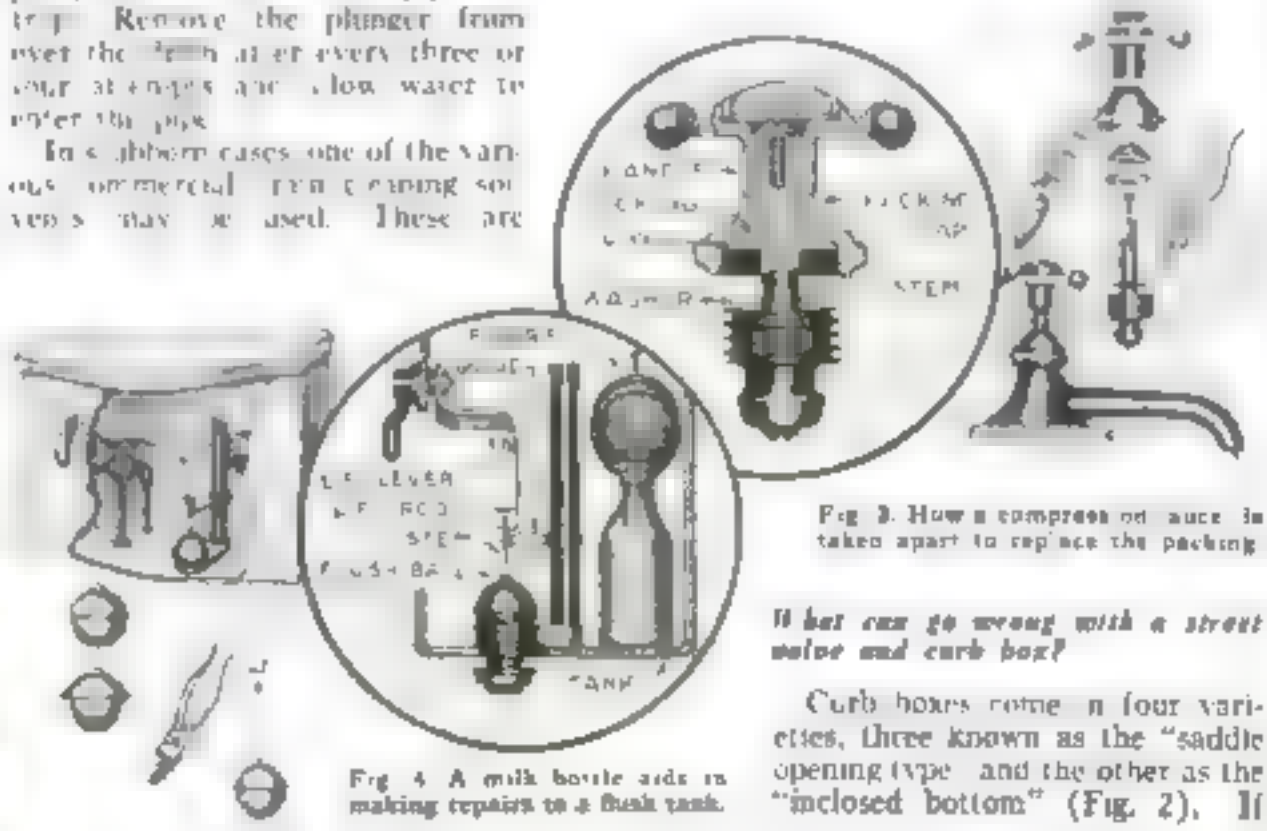

Fig. 3. How a compression faucet is taken apart to replace the packing

Fig. 4. A milk bottle aids in making repairs to a flush tank.

What can go wrong with a street valve and curb box?

Curb boxes come in four varieties, three known as the "saddle opening type" and the other as the "inclosed bottom" (Fig. 2). If

the box is of the open-saddle type *S*, Fig. 2, it may shift away from the valve stem through the settling of the ground and make it impossible to reach the valve with the key. A periodic inspection will reveal this and make it possible to dig up the ground and replace the saddle over the valve. If the inclosed bottom type is used, little trouble of this sort is experienced since the box is screwed fast to the body of the valve. Inspection also will reveal if any dirt, stones, or sticks have fallen into the box and made it impossible to reach the valve stem. These can be removed with forked sticks or a looped snare made from heavy flexible wire. Be sure that the long key rod is where it can be found instantly.

If the valve sticks and all efforts to move it fail, what can be done?

A valve of this type never should be forced. If the valve tends to stick pour a little kerosene over the stem and the top of the valve and give it time to penetrate, then apply an even pressure with the key.

How do you remove the top of a curb box?

There are three types of curb box tops in general use. That shown at *1* Fig. 2, has a center disk which is removable, *2* has a cap that unscrews from the top of the box, and *3* has a bolt which, when loosened, allows the cap to be swung to one side.

How can the packing on a compression faucet be replaced?

If water leaks from around the stem of a faucet when it is turned on, it is a sure indication that the packing about the stem has become worn and needs replacing. First shut off the water supply and open the faucet to relieve any pressure that may be present. Next, unscrew the packing cap from the base of the faucet (Fig. 3), remove the knurled nut that holds the "hot" or "cold" label in place, and remove the small screw that locks the handle on the stem. It is now a simple matter to remove the stem and the packing. A substitute for regular packing can be made by rubbing a little lard or soap on a piece of cotton twine about a foot long, cutting it into three pieces, and twisting the strands together. Replace the packing, put the cloth washer (marked *C W*) and the brass washer in place, and set the stem back in the packing cap. By screwing the packing cap back on the base of the faucet, you will bring the packing and washers into their correct positions.

Is it necessary to shut off the water supply when replacing the rubber ball valve in a flush tank?

No, the large float ball usually can be held in the off position by a milk bottle filled with water to prevent it from tipping (see Fig. 4). Then the replacing of the small rubber flush ball is merely a matter of unscrewing the stem, removing it from the guide, and putting a new stem and valve ball in place by a reverse process. Special rubber balls, which come in two shapes, can be purchased at any hardware store.—W. M. BUTTERFIELD.

Take this SAMPLE of CASCO WATERPROOF GLUE

and try it on anything that you want to make, or anything that comes loose around your home, shop, or office. You can do a piece of fine cabinetmaking, or fix everything from wagon wheels to washing machines, with waterproof CASCO. And it's the simplest kind of glue for amateurs or skilled craftsmen to use—just mix cold water and powder. Tested and proved the strongest adhesive known. Used for years in big factories of all kinds. Now this greatest of all glues is available in small packages for everybody.

Anything Glued With CASCO Stays Glued —Permanently

CASCO by actual test withstands 3,500 pounds per square inch on hard maple (U.S. Government test). Heat, frost, moisture cannot affect CASCO. Glues everything—wood to wood, metal, glass, leather, cloth, paper. It's easy now for you to do all your odd jobs with the same glue that expert craftsmen, cabinetmakers and carpenters find to be the strongest and best glue made. Just put your name and address on the coupon and send it along with ten cents for this generous sample.

Send This Coupon for Your SAMPLE

Actual Letters from Men Who Sent for Samples

Read about the Jobs they Did

Stands the Strain on Wagon Wheel Spokes

Held Fast on High Speed Power Belt



It Takes Waterproof Glue to Hold on a Clothes Wringer



To Make Refrigerator Car Waterproof

Rickety Chair Made Solid

An Axe Handle Gets Hard Jolts



Exposed to Sun, Rain and Snow



THE COUPON below will bring you a generous sample of the famous CASCO Waterproof Glue. Enough to do a dozen little jobs that will demonstrate how *EASY* it is to use—how *IMPOSSIBLE* it is to break the joint when glued with CASCO! Send for your sample TODAY!

THE CASEIN MFG. CO. OF AMERICA, INC.
205 East 42nd Street, New York, N. Y. P.S.4-31

Here's my 10c (stamps) for which please send me your trial package of CASCO Waterproof Glue.

Name

Street

City *State*

And here is my dealer's name and address (paint, hardware, or lumber dealer)

THE CIGARETTE
IS MIGHTIER
THAN THE PEN..

No thanks, Mr. Webster . . . no words today. OLD GOLD, the cigarette itself, tells its own story better than all the diction in the dictionary. One pack's worth more than a thousand words. 158 victories in 165 public *taste-tests* of the four leading brands show how convincingly even a few puffs tell OLD GOLD'S taste-winning, throat-thrilling story. Light up . . . and write up your own opinion

OLD GOLD

CIGARETTES

NOT A COUGH IN A CARLOAD

Easily Built Model of the *Travel Air* "Mystery" Ship

By DONALD W. CLARK

WITH its streamlined fuselage, cowled motor and housed wheels the low-winged Travel Air cabin monoplane forms a striking addition to our series of stripped-scale models of noteworthy modern aircraft.

The motor cowling and fuselage are shaped from a block of soft pine or white cedar softwood [illegible] and the wing. A recess is cut in the underside to receive the wing and two slots, one for the [illegible] and the other for the [illegible]. Wrestle the wing in one piece from a 5 to by 2 by 12 in. piece of stock. Then cut it in two so that each half can be given the proper dihedral before being glued in place with brads.

The two streamlined wheel housings are shown. These make one complete wheel each. Split a ball and glue each half to one of the covers. This will give you two complete wheels and covers. The tail units and the propeller are cut from thin sheet metal. Lollypop sticks may be used for the main struts and the 1/16 in. diameter bracing wires are fastened to the wing as indicated.

Side, top, and front views of the assembled model; a detail drawing of the block which forms the fuselage and motor cowling; patterns for the tail units and wheels and wing brace fittings.

BLUEPRINTS FOR YOUR HOME WORKSHOP

TO ASSIST you in your home workshop, Popular Science Monthly offers large blueprints containing working drawings of a number of well-tested projects. Each subject can be obtained for 25 cents with the exception of certain designs that require two or three sheets of blueprints and are accordingly 50 or 75 cents as noted below. The blueprints are each 15 by 2[illegible] in.

Popular Science Monthly,
381 Fourth Avenue, New York

Send me the blueprint or blueprints, I have underlined below, for which I inclose

dollars *cents*

Airplane Models

50. 16-in. Rise-off-Ground Tractor
69. Lindbergh's Monoplane (3-ft. flying)
82. 30-in. Single Stick
86. 25-in. Twin Pusher
87. 38-in. Seaplane
89-90. *Bremen* (3 ft. flying) 50c
102. Morris Seaplane (record flight 13 g min.)
104. Tractor (record flight 6,024 ft.)

Furniture

1. Sewing Table
2. Smoking Cabinet
3. End Table with Book Trough
5. Kitchen Cabinet
13. Tea Wagon
17. Cedar Chest
18. Telephone Table and Stool
19. Grandfather Clock
20. Flat Top Desk
21. Colonial Desk
24. Gateleg Table
34. Sewing Cabinets
33. Dining Alcove
36. Book Built-in Chair
37. Simple Bookcase
38. Sheraton Table
39. Chest of Drawers
40. Dream Cabinet
60. Welsh Dresser
68. Magazine Rack Table
70-71. Console Radio Cabinet 50c
77. Piet Cabinet and Wall Shelves
78. Treasure Chests
88. Modernistic Stand and Bookcase
91. Folding Screens
93. Modern Lamps
100. Modernistic Book Ends Book Shelf Low Stand
105. Tavern Table and Colonial Mirror

Radio Sets

103. One-Tube (battery operated)
42. Three-Stage Amplifier
45. Four-Tube (battery operated)
54. Five-Tube (battery)
55. Five-Tube Details
79. Electric
80. Electric High Power Unit
81. Electric Low Power Unit
97. One-Tube Electric
98. Two-Tube Electric
99. Four-Tube Electric
109. Screen-Grid Set
110. Full Electric Headphone Set

Ship and Coach Models

44-45. Pirate Galley or Frigate, 50c
46-47. Spanish Treasure Galleon, 50c
48. 20-in. Racing Yacht
51-52-53. Clipper *Sovereign of the Seas*, 75c
57-58-59. Constitution (3 of these sides), 75c
61-62. Viking, 50c
63-64. 20-in. Toy Motor Boat, 50c
74-75-76. *Santa Maria* (18-in. hull), 75c
83-84-85. *Mayflower* (17½-in. hull), 75c
92. Baltimore Clipper (8-in. long)
94-95-96. Mississippi Steamboat 75c
106-107. 47-in. Racing Yacht Sea Sledge 50c
66. Ship Model Weather Vane
108. Scenic Half-Model of Barque
110-111-112. Schooner *Bluenose* 75c
115-116-117. Concord Stagecoach, 75c
118-119-120. Covered Wagon, 75c
121-122. Clipper Ship in a Bottle 50c
123-124. Queen's Sedan Chair 50c
125-126-127. U.S. Destroyer (3-ft. hull) 75c

28. Pullman Lay Table
56. Birds and Animals
67. Lindbergh Plane
72. Doll's House
73. Doll's Furniture
101. Fire Engine, Sprinkler Truck, Tractor
113. Lathe, Drill Press, Saw and Jointer
114. Airplane Cockpit with Controls

Miscellaneous

15. Workbench
26. Crib and Play Pen
30. Tool Cabinet, Boring Gage, and Bench Hook
65. Six Block Puzzles
128-129. 14-ft. Outboard Racing Boat, 50c

Price 25 cents each except where otherwise noted

Name
(Please print name and address very clearly)

Street

City and State

THRILLS ADVENTURE COMEDY

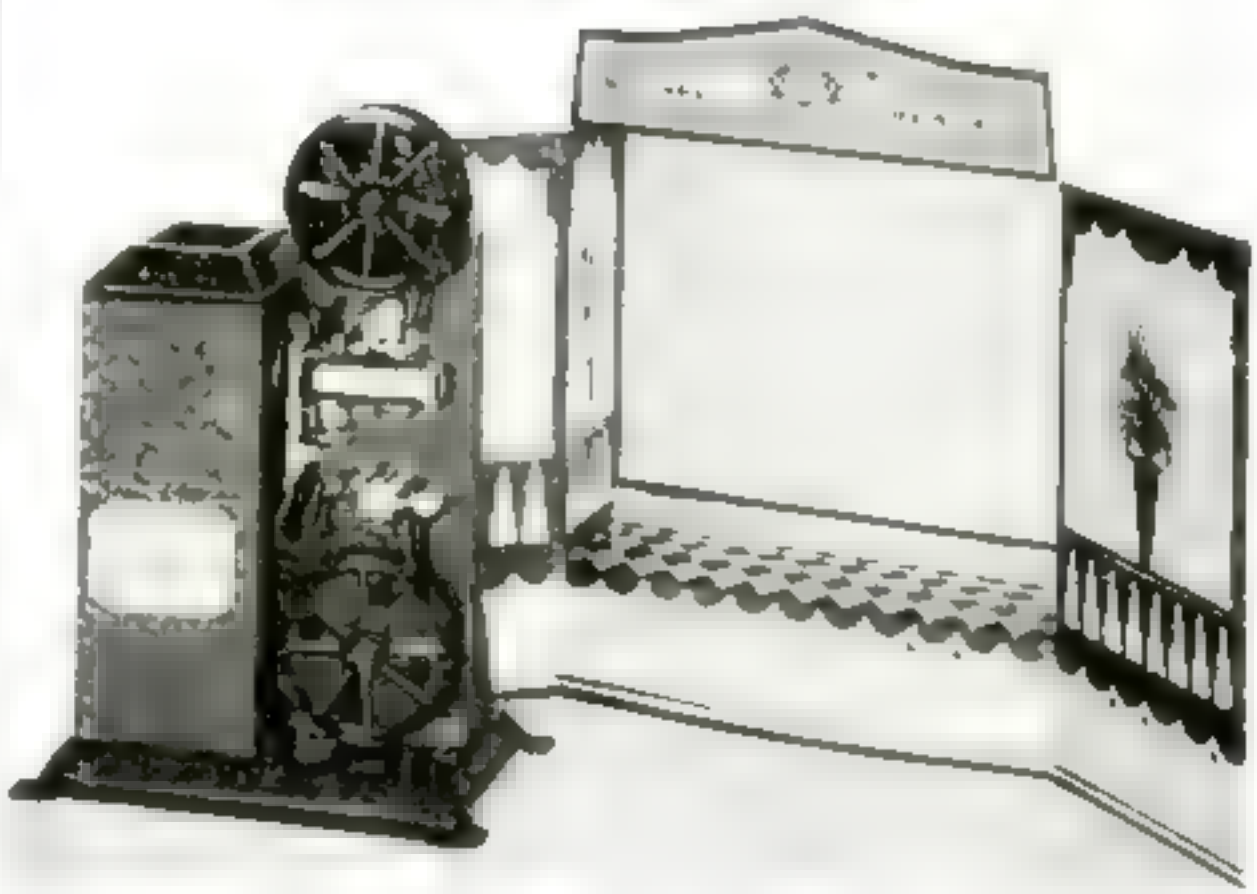

. . . In this New EASTMAN Movie Projector that children run themselves

KODATOY

A MOVIE PROJECTOR FOR CHILDREN

PLAYROOM movies give children a great thrill. They're entertaining. Instructive. And such a barrel of fun for any boy or girl.

Kodatoy is amazingly simple . . . entirely safe. Yet it's an efficient movie projector—made by Eastman, the world's largest maker of home movie equipment. A seven-year-old child can easily run it.

$12 COMPLETE

There's a whole catalog of Kodaplay movie films to choose from. Airplane flights. Felix the Cat. Battle scenes. Sports. Westerns. Charlie Chaplin and other famous comedians. Travel wonders. Adventure. All moderately priced at 30 cents, 60 cents, 90 cents per reel.

Kodatoy uses 16 mm. safety film. It has a powerful projection lens and three-blade shutter. Framing is automatic. You'll be surprised at the bright, clear quality of the movies Kodatoy shows and the steady, flickerless projection.

The complete outfit—Kodatoy and a miniature theatre with "silvered" screen—costs but $12. Motor-driven model, $18.50. Or motor sold separately, $6.50. Any leading Kodak dealer, toy or department store will be glad to show you Kodatoy. Fill out and mail the coupon for interesting descriptive folder giving you more details about this practical playroom movie projector.

Eastman Kodak Company, Rochester, N. Y.
Please send me FREE without obligation the folder describing Kodatoy

Name_____

Street_____

City_____

F.S. 4-

THESE five points alone bring a new value in the small lathe. Built by LeBlond, a leader and producer of fine machine tools for over forty years.

It enables you to purchase a modern high-class tool at low cost and on easy terms.

The Regal will bring you precision, ease of operation, and unusual value per dollar expended.

The lathe comes to you complete (with motor), ready to run—just plug in.

The eight-speed selective geared headstock makes speed changing extremely simple. The feed rod takes the wear off the lead screw. Self-contained motor drive with multiple V belts permits installation anywhere. Motor is mounted on leg, avoiding vibration in headstock. All moving parts enclosed. Heavy bed is reinforced for greater rigidity and smoother operation. The Regal is built in sizes from 10" to 18", and prices range from $398.00 to $1144.00. The easy payment plan makes it a good investment.

Clip the coupon and get detailed description and prices of the Regal lathes built by LeBlond.

The R.K. LEBLOND Machine Tool Co.
CINCINNATI, OHIO, U.S.A.

The R. K. LeBlond Machine Tool Co.
202 Regal Division, Cincinnati, Ohio
Send me full details of the Regal Line of LeBlond Lathes.
Name
Address
City State

An End Table That Strikes the Note of Modernism

By HERMAN HJORTH

WHETHER placed beside an armchair and used as an end table for magazines and books or set against a wall, the modernistic table illustrated in Figs. 1 and 2 is at once a convenient, attractive, and easily made piece of furniture.

First, obtain the stock from a lumber dealer according to the bill of materials on the following page. Remember, however, that the dimensions given are finished sizes and that a small allowance must be made for width (about ¼ in.)

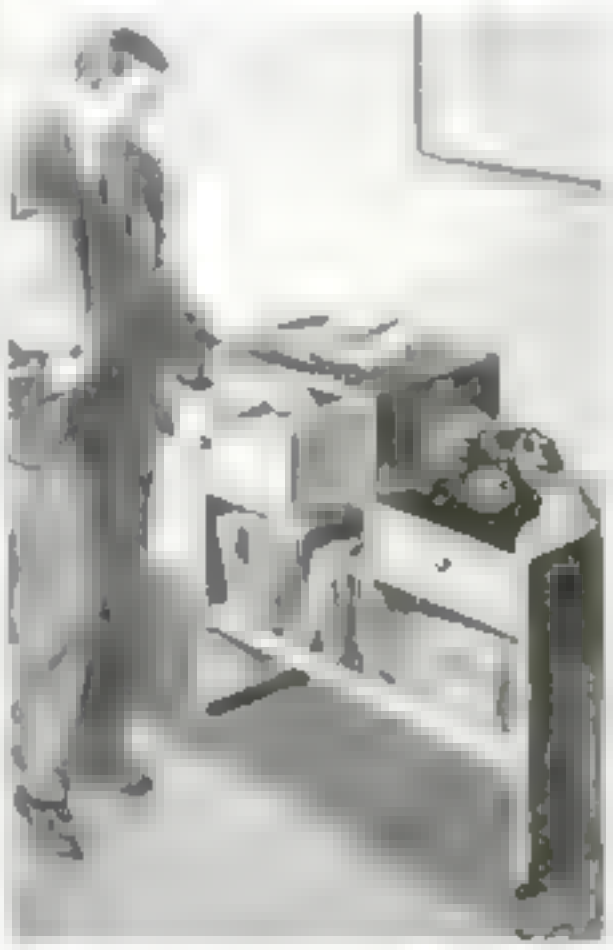

Fig. 1. Simplicity, angularity, straight lines, and clear, smooth surfaces distinguish this table.

and for length, about 2 in. Buy 4/4 in. stock dressed on both sides, and be sure to get boards that are dry, flat, and free from cracks or other defects. These boards may be obtained in any reasonable width and in suitable lengths. If the end table is to be stained, I should select a wood like gum, which has a beautiful grain and color and is easy to work. If it is to be painted or lacquered, a close-grained wood like whitewood is preferable.

All the boards should be sawed and planed to the exact lengths. Be careful to plane the ends of the boards true and square, otherwise a good joint cannot be obtained. The boards marked *A*, *B*, and *H* should be ½ in. longer than the finished dimensions given to facilitate the making of the joints on the end of each. See that boards *C* and *D* and boards *F* and *G* are exactly the same in length.

Smooth both surfaces on all the boards with plane, scraper, and sandpaper. Lay

out all of the dadoes on all the boards, checking and rechecking the dimensions and placing corresponding boards side by side to see that the spaces between the dadoes are exactly alike

A dado is a groove cut across a board into which the end of another board fits at right angles. Since this joint must be tight, it is well to place the end of the

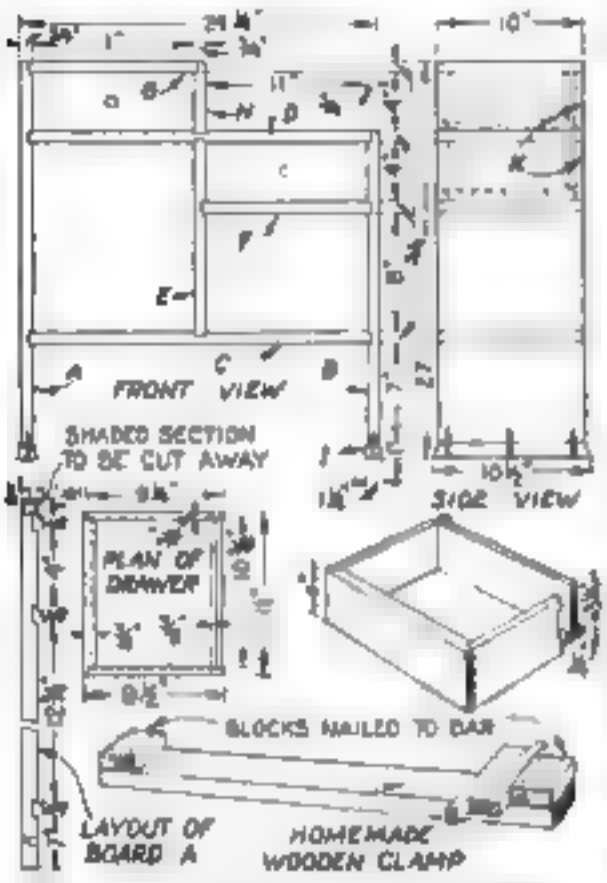

Fig. 2. Front and side views, details of drawers, layout for dadoes, and a homemade clamp

board that it is to fit into the dado on top of the lines to make sure that the dado is not marked too wide

To cut the dadoes, a beginner can make the work easier by nailing a strip of wood on each side of the lines with fine brads. Saw down to a depth of ¼ in. with a back saw as shown in Fig. 3, page 220. The strips of wood will guide the saw insuring a straight cut just inside the lines

Chisel down almost to the depth of the saw cuts, using a ½-in. chisel and a mallet. Hold the chisel with the bevel down, and cut from both edges toward the middle. Now adjust a router plane to the depth of the cut and plane all the dadoes with this setting of the plane (Fig. 4). Set the plane iron exactly to ¼ in.

Materials for End Table

No. of Pcs	Part	T	W	L
1	Side *A*	¾	10	26
1	Side *B*	¾	10	21¼
2	Shelves *C* and *D*	¾	10	23¼
1	Partition *E*	¾	10	21¾
2	Pieces *F* and *G*	¾	10	11½
1	Side *H*	¾	10	5
2	Feet *I*	1	1½	10½
2	Backs *K*	¼	4	11
2	Drawer fronts	¾	4	11
4	Drawer sides	½	4	9¼
2	Drawer backs	½	3½	10⅜
2	Drawer bottoms	¼	10⅜	9
2	Drawer knobs			

All dimensions are in inches.

RUNNING along twin rails of quality, the work of Nicholson Files and Black Diamond Files satisfies the rigid requirements of leaders in every great industry.

The parallel performance of Nicholson and Black Diamond Files is accounted for by the fact that each is the choicest product of the largest file organization in the world.

Industrial buyers of files who must have the utmost in file value do not need to hesitate between these two leading brands. Figuratively speaking, they can shut their eyes and select either Nicholson or Black Diamond Files.

Ask your hardware or mill supply dealer

NICHOLSON FILE COMPANY
Providence, R. I., U. S. A.

NICHOLSON U.S.A.

Providence Factory
NICHOLSON FILE CO.

Philadelphia Factory
G. & H. BARNETT CO.

A FILE FOR EVERY PURPOSE

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 8.

Don't Be Lonesome—

Be The One Who Leads The Crowd!

ARE you the popular one in your crowd? Do you set the pace for others to follow, or are you the one who is never noticed, who can't do anything to entertain at parties—always on the edge of the group wishing you were the one in the center being admired and envied?

Well, you needn't wish you were popular, any longer,—you CAN be popular for here's a secret that will make you a leader, with so many friends you won't know what to do with all your invitations. Learn to play the Harmonica!

WHAT IRVING BERLIN popular composer of "All Alone" "Blue Skies" "Remember" "Russian Lullaby" "Always" "Just a Little While" says about the Hohner Harmonica.

"It is positively amazing to observe the way America has taken to the Harmonica. The first musical instrument I ever played was a Hohner Harmonica. It is entirely natural that a healthy youngster should take to the Harmonica, and it will not surprise me if the Harmonica swiftly becomes a most important factor in making America a more musical nation."

Easiest of all Instruments to Play

And maybe learning to play the harmonica isn't easy! Just read what Earl Dickerson of Minnesota writes. He says, "I had always imagined that a harmonica was a difficult instrument to master. I found, however, that with the Instruction Book as a guide learning to play was astonishingly simple. In a few hours I could play Home, Sweet Home, Old Black Joe, America, and Old Folks at Home. I have found that to play a harmonica at any gathering or party adds a lot to a boy's popularity."

Instruction Book Free

Why don't you send for the Harmonica Instruction Book, too? It's FREE. Just fill in and send the coupon below. Besides telling you what to do, the Instruction Book is full of pictures that show you just how to do it. It's all so easy you'll be amazed at the trills and tremolo effects you'll get and the expert way in which you can play in only a short time. Mail the coupon today for your free book.

A Quality Instrument

Hohner Harmonicas come in a wide range of styles and prices but each instrument is equally true in tone, accurate in pitch and perfect in workmanship. From the popular and easy-to-play "Marine Band" to the elaborate "Super Chromonica" with a playing range of three chromatic octaves and recognized by musical authorities as an orchestral instrument, there is a Hohner Harmonica for every purse and musical requirement. Learn to play a Hohner.

FREE

Illustrated Harmonica Instruction Book — Mail Coupon Today —See how easy it is to play.



M. HOHNER, Inc.
114 E. 16th St., Dept. 110-D, New York

Please send me FREE Illustrated Instruction Book which tells how to play the Harmonica.

Name

Address

City State . . . .

and again plane all the dadoes to insure an even depth.

Saw off the ½-in. projections on boards *A*, *B*, and *H*, leaving just a recess or rabbet on the upper ends (see Fig. 2).

Sand all inside surfaces to remove any scratches and fit boards *A*, *B*, *C*, and *D* together. If any of the dadoes should be too narrow, a little may be planed off the surface of the board that is to fit in the

Fig. 3. Cutting a dado with the aid of two strips tacked on as guides for the back saw.

dado. Do not attempt to make the dado wider, and above all, do not use a file on the sides of the dadoes or on the ends of the boards.

Put glue on the ends of the boards *C* and *D* and in the corresponding dadoes on boards *A* and *B* and clamp them together. Test all corners for squareness. Adjustments can be made by moving one end of the clamps up or down, as the case may be. Protect the finished surfaces with blocks. A homemade clamp such as shown in Fig. 2 can be made from odd pieces of lumber. Next fit pieces *E* and *F*, put glue on the ends and in the grooves, slide them in place; and then fit and glue boards *G* and *H*.

The glued boards may be reënforced with brads set below the surface of the wood, but this is not necessary when the joints fit tightly and the gluing is well done. When dry, all the edges should be smoothed with a plane and sandpaper. The feet are then made and screwed in place as shown in Fig. 2.

If drawers are to be fitted between the boards *D*, *F*, and *G*, the space in the rear

Fig. 4. After the dado has been roughed out with a chisel, it is finished with a router.

should be filled with boards *K*, especially if the table is to stand free. Each drawer consists of a front board, which first should be fitted to the opening the drawer is to fill, and two sides, a back, and a bottom.

The front and the sides of the drawer all have a groove for the bottom. The front is rabbeted for the sides, and a dado is cut in each side for the back.

These grooves, rabbets, and dadoes may be made as explained above if a motor-driven groover or a grooving plane is not available. The sides of the drawer are glued and nailed to the front board, the back is then glued to the sides, and the bottom is slid into the grooves and nailed to the underside of the back

As to the finish, the following procedure is recommended If made of gumwood, no stain is needed unless a darker shade is desired. A coat of white or orange shellac, thinned with alcohol is first applied. After a few hours this is rubbed down with No. 00 steel wool, and another coat of shellac is applied. This also is rubbed with steel wool, after which the table may be finished with a coat of wax either liquid or paste. Instead of being shellacked and waxed, the edges and the feet may be given one or two coats of black lacquer. This will hide the joints and at the same time will also make a pleasant contrast

If an opaque finish is desired, the piece should be given first a coat of thin shellac. After being rubbed down, this should be followed by one or two coats of colored lacquer. Again it is desirable to finish the edges in a contrasting color

WOODEN CANDLESTICKS OF MODERN DESIGN

THIS low decorative candlestick is of the modern type. With the tall graceful candles now so popular, it looks better than the more usual type of candleholder

A pair of the candlesticks may be made of mahogany, gumwood, or walnut. In turning them the chief point to remember

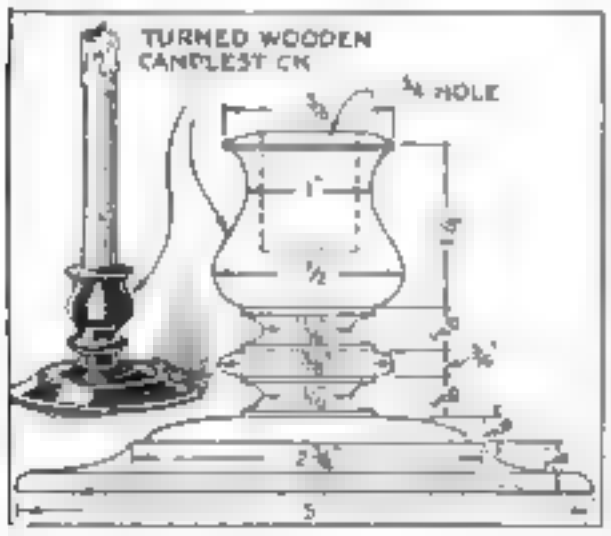

A pair of candlesticks turned to this design will ornament any console table or mantel

is to make them appear as squat as possible

Stain them the desired shade and fill the grain of the wood with a good paste wood filler of the same color Apply a coat of high-grade varnish, allow it to dry at least two days, and then rub the candlesticks down with pumice stone and oil. The rubbing should be done on the lathe. After clearing off every trace of pumice stone and oil, give them another coat of varnish. Rub first with pumice stone and then with rottenstone to give a fine luster

The protruding ends or centers, which I make a practice to retain until the end are now cut off and a ¾-in. hole is bored in the top.—RICHARD GRAVES.

USE YOUR SEARS CATALOG

why in the world should you buy anywhere else . . . . . ?

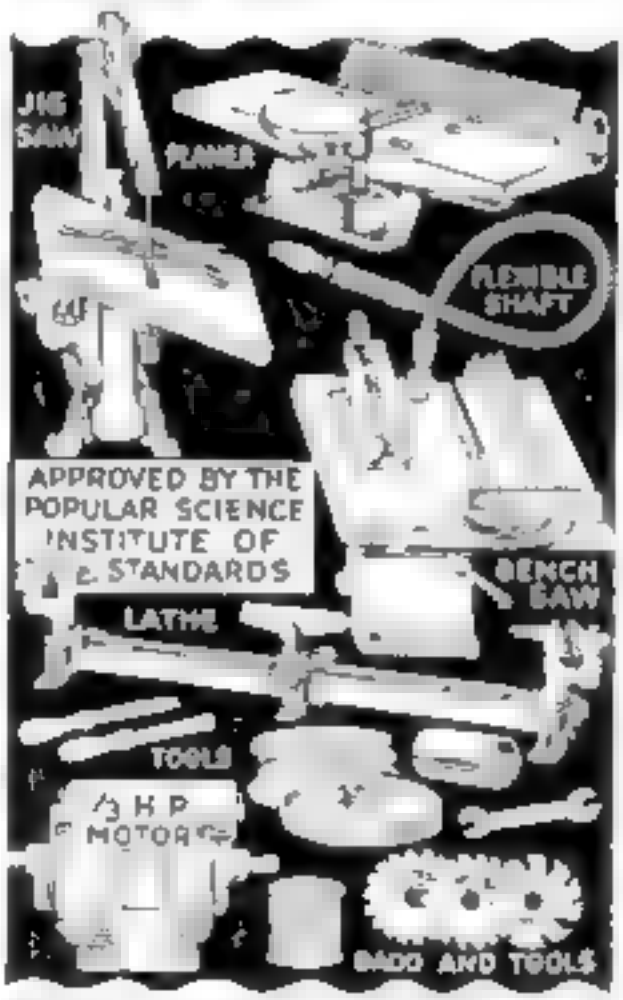

WHY NOT ACCEPT THIS SAVING? . . . .

Low prices on sound quality are proverbial at Sears Roebuck. Buying for 3,000,000 customers—selling for less—you save. There's no room for argument—you need never pay more

An outstanding example of a thrifty offering is our new Catalog for Spring and Summer in our quality proved nationally advertised "Driver Harris Workshop." You'd pay two prices elsewhere to match the "Driver" but those who know advise you to buy here.

As with Workshops, so is it with all other merchandise. This new catalog offers 10,000 articles all priced at new low levels—all guaranteed to give complete satisfaction.

Frankly, we can't think of a single reason why you ever buy elsewhere. For prices are always lower at Sears. And this season they are the lowest this generation has seen. Quality is assured by laboratory tests, merchandise inspections and definite high standards. Service is always better at Sears. And lastly, satisfaction is guaranteed by the World's Largest Store.

Use your Sears Catalog whenever you are going to buy. If you haven't a copy of our new Spring and Summer Book, we'll gladly send one free and postpaid. Write our mail order store nearest you.

SEARS, ROEBUCK AND CO.

Chicago, Philadelphia, Boston, Kansas City, Minneapolis, Dallas, Atlanta, Memphis, Los Angeles and Seattle

USE YOUR SEARS CATALOG

This seal on an advertisement is POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 6.

New Model South Bend Lathes

SOUTH BEND LATHES are made in sizes 9" to 25" swing with 3' to 12' bed lengths and may be had with countershaft or motor drive, in bench, floor leg, tool room, and gap bed types. Easy payments, if desired — a small payment down and the balance in 12 monthly payments.

A few prominent users:

Westinghouse — General Motors
Western Electric — Studebaker
General Electric — U. S. Government

9" x 3' Junior Rack-Geared, Screw Cutting, Precision Lathe, also made in 3½' and 4' bed lengths.

Complete with Countershaft and Equipment. Weight, 375 lbs. Price **$169**

Payments, $33.80 Down, Balance $11.63 a Month for 12 Months

16" x 6' Motor Driven Quick Change, Back-Geared, Screw Cutting, Precision Lathe, furnished in 6', 7', 10', 12' and 14' bed lengths.

Complete with Reversing Motor, Reversing Switch and Regular Lathe Equipment. Weight, 1,210 pounds. Price **$397**

WRITE For These Books

"HOW TO RUN A LATHE"
25c postpaid

Contains 192 pages, more than 100 illustrations. Shows how to handle 400 different types of lathe jobs as practiced in the modern machine shop. Sent postpaid for only 25 cents (coin or stamps of any country accepted).

AUTO MECHANICS' SERVICE BOOK No. 96
25c postpaid

This 96 page book, with 200 illustrations, describes correct and most practical way to do 60 automobile service jobs that come to the shop.

CATALOG No. 92-A—FREE

This 104 page book illustrates, describes and prices the 96 different sizes and types of New Model South Bend Lathes. Send the Coupon now for your copy, free.

SOUTH BEND LATHE WORKS
845 E. Madison St., South Bend, Ind., U. S. A.
Lathe Builders for 34 Years — 50,000 in Use

SOUTH BEND LATHE WORKS
845 E. Madison St., South Bend, Indiana, U. S. A.
Gentlemen: Please send me books checked
☐ How to Run a Lathe" (25c)
☐ Auto Mechanics' Service Book (25c)
☐ Catalog No. 92-A (Free)
Name_____
Address_____
City_____ State_____

BIRD HOUSE RESEMBLES A CUCKOO CLOCK

QUAINT as a cuckoo clock, this bird house will provide many amusing moments for children and adults alike, if it is hung at a gable end of house or garage.

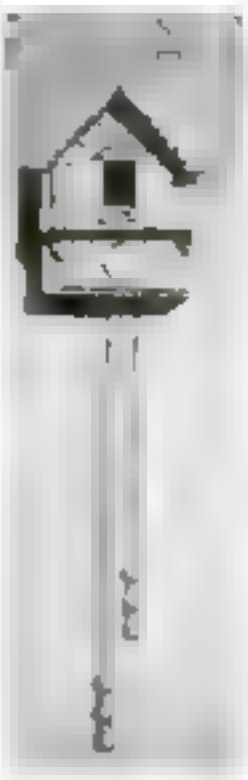

The bird house.

The house can be built of odds and ends of light boxes or any planed ½-in. material, together with a discarded small clock, two yards of cheap chain, and six empty spools. While the drawings give dimensions, they are the maximum for this type of bird house and it can be built much smaller for wrens and other little birds. The doorway, which is 2 by 3 in., may be modified to exclude undesirable birds by closing it from the inside with a piece of ½-in. board in which a hole has been bored.

The chimney is merely a piece of blind stop surmounted by two small dowels to give an old-world effect. Cover the exterior with outside white paint and then reproduce the half-timber design with stripe of very thin wood. The scalloped barge boards at the edge of the roof cornice are two pieces cut from cigar box wood.

The clock weights are made of spools. Each weight consists of two complete spools and two flanges or lips cut from another spool, assembled as shown.

Finish the half-timbering, the barge boards, and the supports in a dark stain and paint the chimney dowels red. The clock rim and weights may be bronzed or enameled black.—DON HOUSEWORTH

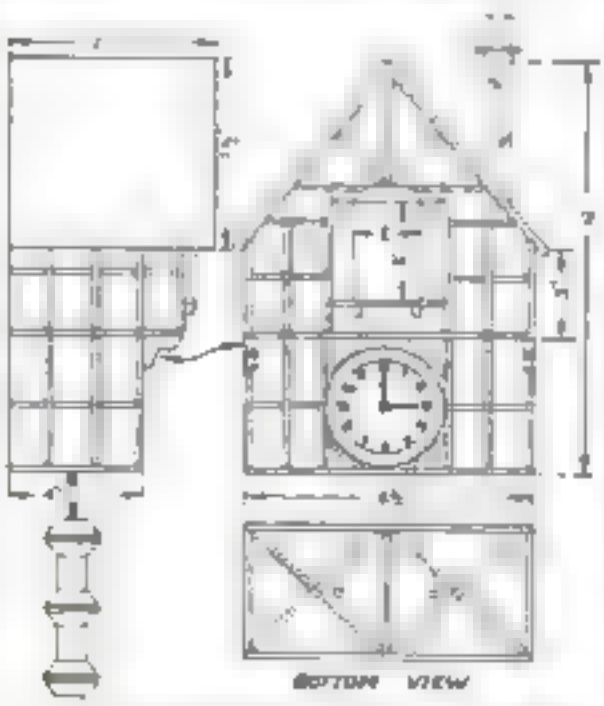

Side, front and bottom views of the cuckoo clock bird house with suggested dimensions.

One who has not used masking tape in decorating with lacquer has neglected one of the best aides in such work. Such tape is indispensable for striping with the brush and for shading with the spray gun. It sticks anywhere, yet can be peeled off without leaving any residue of gum or paper.—C. E. LEARY

Amazing NEW TOOL VALUE

An Automatic Push Drill Carrying in the Handle Eight Sizes of Drill Points

$1.25

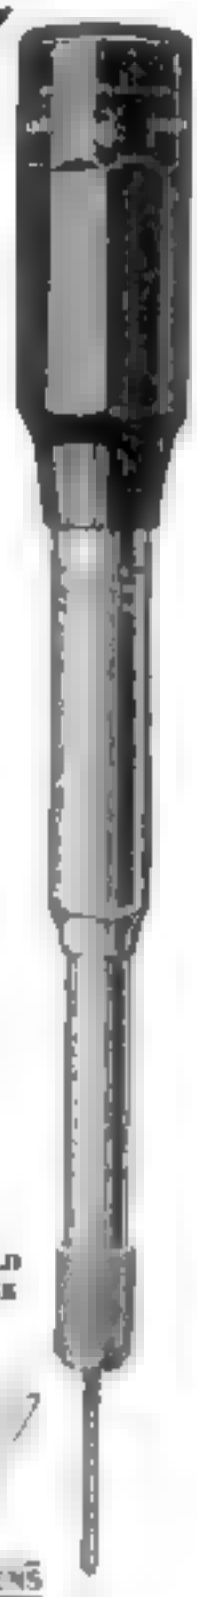

Pick out the size drill you want from the separate numbered compartment. Insert it in the steel jaws. Place drill point where you want hole. Push—push—and presto, you have a smooth clean hole in any wood. It can also be used in plaster. The handiest tool ever invented for household use. Made by one of America's leading makers of fine tools. SHOW THIS AD TO YOUR DEALER AND SECURE A DRILL FOR $1.25 or if he hasn't a stock yet, mail coupon to us and tool will be sent postpaid C. O. D. $1.40. Hundreds of household jobs formerly postponed will now be done neatly and easily.

USE THE COUPON TODAY!

Goodell-Pratt Company, Dept. S-4, Greenfield, Mass.

Please send me a (No. 188 Automatic Drill). I will pay postman $1.40.

Name_____

Street_____

City_____ State_____

My hardware dealer is_____

Nothing under $2.00 ever bought such a good tool.

When the "Urge-to-Go" Gets You

GO!— Go the *man's* way, on the *man's* steed—an Indian Motocycle. Leave the glass enclosures for your wheel-chair days. Now, while your blood runs and your heart sings, put *thrill* in your goings—ride a lean, lithe motorcycle.

Let the wind tear at your hair, let the sun beat down on your shoulders . . . . . what do you care? A million miles invite you . . . . a million miles, every one a mile of joy—at the lowest cost in the world.

Valuable dealer franchises are open . . . . write for details before they are snapped up.

Mail It! Today!

Indian MOTOCYCLES

INDIAN MOTOCYCLE CO.
B-4 SPRINGFIELD, MASS.

Please send folder on Indian Motocycles.
My age is.. years.
NAME .....
ADDRESS .....

Altering Doors to Get More Light

SOLID, paneled outside doors, which keep out the sunlight and often give the appearance of being excessively heavy, can be easily altered by substituting a sash and glass lights for two or more of the wooden panels

The average door of this type is generally from 1¾ to 2 in. thick, but the methods to be described can be applied to a door of any thickness. The first step is to examine the construction of the door and determine upon the method to be used

A sash and lights can be easily substituted for the panels of solid, old-fashioned doors

in fitting the sash to it. It is obvious that if a sash 1¾ in. thick is fitted into a 1½ in. door as at *A*, *B* and *C* in the drawing at the bottom of the following page it will project inside but the same sash will fit nicely in a 1¾-in. door as at *D*. The sash may be made at a mill, in which case a common sash molding will be used but we shall assume that the reader wishes to do the entire job himself especially if he has a motor-driven workshop. Many types of moldings can be made, but the home worker can do no better than to use one with a bevel molding such as will be described.

The sash should be made of straight, well-seasoned white pine, whitewood, or redwood. Cut the stiles (upright members) *E* at least 1 in. longer than needed, the top rail *F* 1½ in. wide, and the bottom rail *G* 2 in. wide. A sash thinner than 1¾ in. will not stand the usage it will receive, nor will one large light of glass be so likely to resist the slamming of the door as will the smaller lights suggested.

The middle rails *H* and the muntins *I* should be ¼ by 1¼ in. and the rabbets *K* a scant ¼ by ½ in. to allow 5/16 in. between them as shown. The rabbets on the stiles and rails should be the same. The flat face *L* and the bevel *M* should be planed by hand, care being taken to see that, in all cases, the corner *N* is squarely opposite the corner *N1*, which will bring the distances *O* on *H* and *J* equal.

Lay the pieces close together in their correct relation and mark across all at

MORE MOTOR WEAR IN **ONE START**

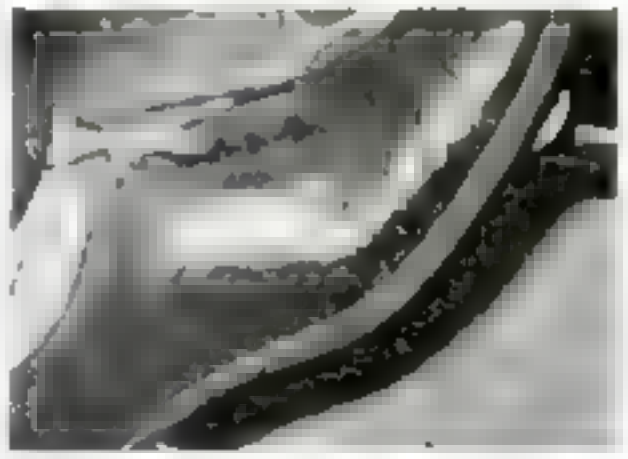

than in driving

ONE HUNDRED MILES

If anyone accused you of running your motor without oil for at least three minutes a day, you'd certainly deny it.

But, as a matter of fact, you're probably doing that very thing—and your engine is suffering accordingly.

Every time you step on the starter three minutes elapse before crankcase oil works up to your cylinder tops. During this time pistons grind cylinder walls—metal against metal—with no lubrication whatsoever. Your motor receives wear equal to over a hundred miles of normal driving

The Cylolator Overhead Oiler prevents this terrific wear by injecting a mist of effective, sure-flowing lubricating oil into each cylinder top *with the first downward stroke of the piston.*

The Cylolator makes starting easier. It stops carbon and valve knocks by keeping carbon soft. It saves your batteries —improves compression.

The Cylolator is attractive in design and durable in construction. Its oil bowl is protected by a chrome-plated case All metal used in the Cylolator is highly resistant to corrosion.

The Cylolator costs but $15.00 complete. We will gladly send you a booklet which explains by text and diagram the working principle of the Cylolator Address Motor Improvements, Inc., 557 Frelinghuysen Ave Newark, N J.

CYLOLATOR
OVERHEAD OILER

Made by the makers of Purolator—the Oil Filter

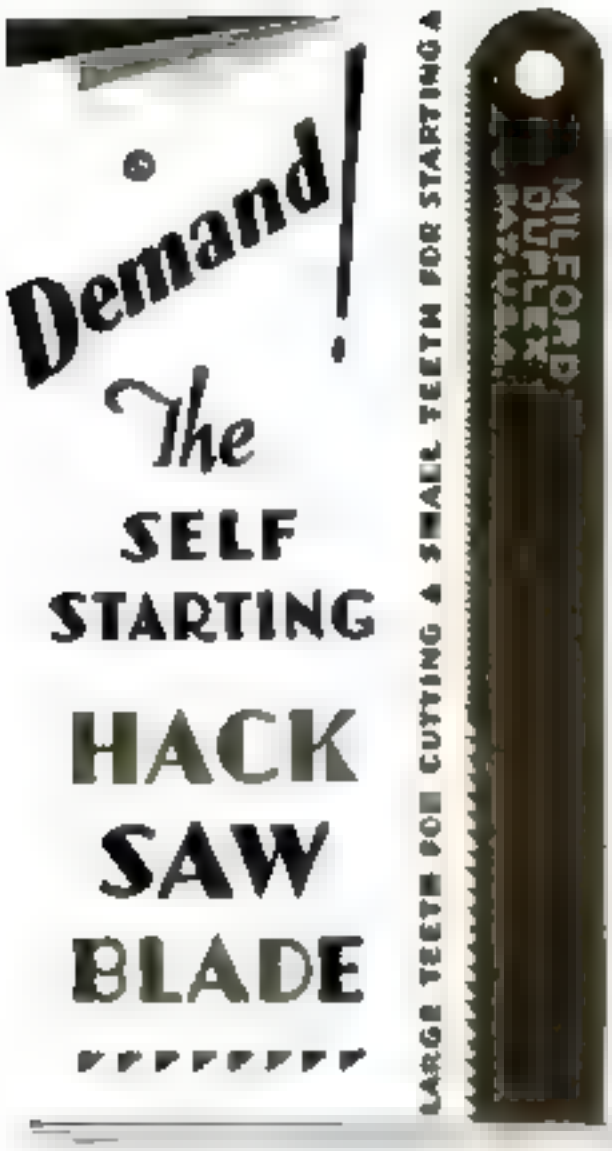

Demand! The SELF STARTING HACK SAW BLADE

THE use of the new MILFORD DUPLEX brings a full appreciation of its remarkable qualities, as compared with the old style hack saw blade.

Fine craftsmen in all fields find it the easiest starting, fastest cutting blade they ever used. The fine tooth section of the *new* MILFORD DUPLEX *starts the cut on the first stroke*, and it cuts in a clean, straight line precisely where you want it.

In addition to fast, clean cutting of regular work, the MILFORD DUPLEX cuts small sections, squares, angles or flat stock with equal accuracy *at any angle.*

If not obtainable at your dealer's, write us direct.

MILFORD DUPLEX (All Hard)
Mil Flex DUPLEX (Hard Tooth-Flexible Back)



Made in 14/28-pitch and 18/36-pitch. The fine teeth start the cut like the feed screw of an auger bit.

Ask for MILFORD DUPLEX

PATENTED

The HENRY G. THOMPSON & SON CO.
Established 1870
New Haven, Conn., U. S. A.

once with a knife to locate the mortises *P*, tenons *Q*, shoulders *R*, and face corner *N*. Cut the rails to exact length and fit *P*, *Q*, *R*, and *N1* of each joint. Make the coped (shaped) joints *S* on the top and bottom rails. Try the sash together dry to check for errors. Sandpaper all exposed surfaces of the molding and glue the sash together, being sure that it is perfectly square. When the glue has set, bore ⅜ in. holes through the stiles and into the rails for about 1½ in. and fit dowels as at *T*. Smooth and sandpaper both sides of the sash, saw the ends of the stile flush, and plane the edges of the sash to the exact size.

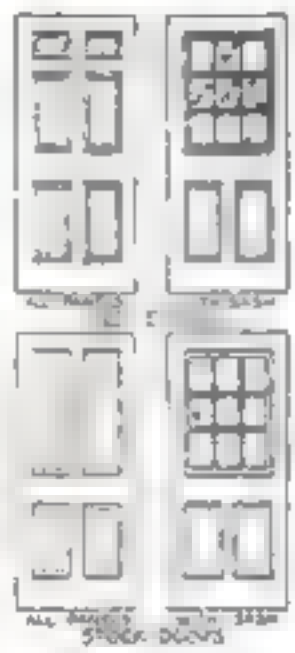

Any type door may be altered to this way

Remove the panel moldings *U* from the old type of door, or carefully trim to edge *V* on a modern door with a sharp wide chisel. Remove the panels by first cutting across the ends and then splitting them out if necessary. Replace the moldings *U* on an old type of door if possible; if too badly broken, provide a substitute as at *W*, and fasten it with brads. The molded side of the sash should be on the side of the door which strikes the rabbet of the jamb as at *Z*.

Fit the sash in place, fasten it temporarily, and fit molding *X*. Remove the sash and set the glass with glazier's points and putty, if desired, as at *Y*. There will be less danger of breaking glass, however, if it is held in place with a ¼ by ⅜ in. stop as at *Z*, cut in square; or with a bead (a strip with a rounded edge) as at *J*, mitered at the corners.

Fasten the sash permanently and paint, being sure that all joints are well filled to resist dampness.—CHARLES A. KING.

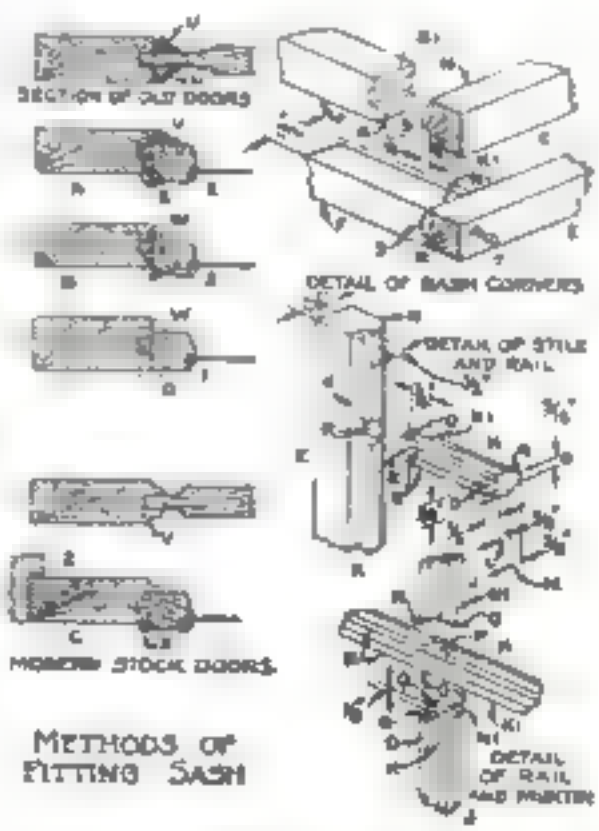

METHODS OF FITTING SASH

Methods for fitting sash in place, and how the rails and muntins are shaped and fitted.

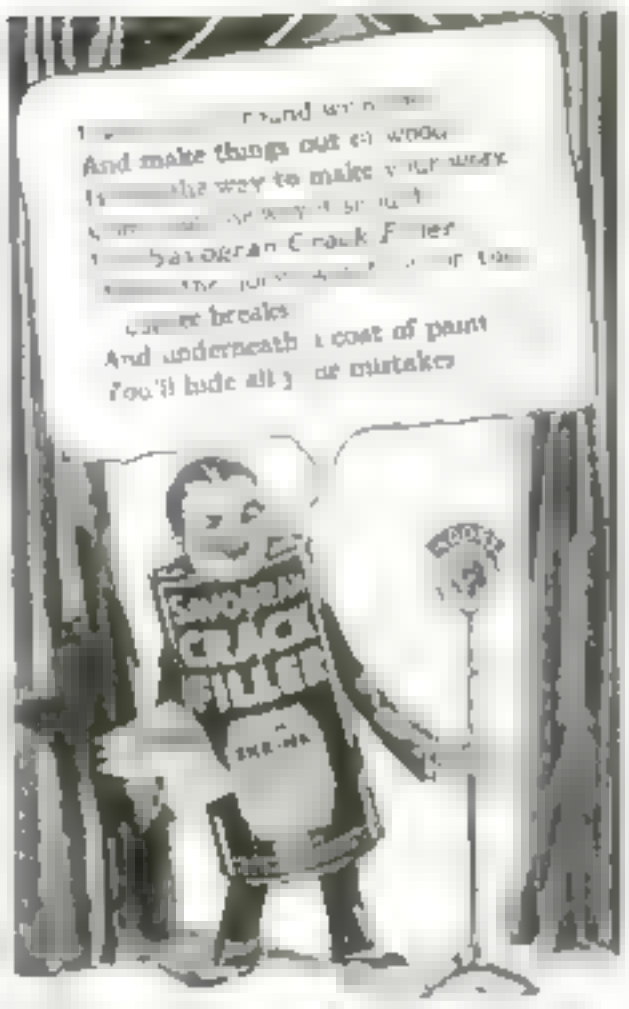

HOWDY, folks! Station Woops sounding off over the National Crackwork Here's good news for handy men, "Mr. Fixits," model-makers, and toy builders. Yessir! Don't get discouraged when you make mistakes. Just mix up a little Savogran Crack Filler, press into place, smooth off, and go on with the job. When you paint it nobody can detect the repair, because Savogran Crack Filler *will not shrink* and it doesn't ring or show through the paint. It stays put. Works like wood—can be sawed, cut, smoothed—holds nails and screws firmly. Sure is easy to use—hard to get along without after you once use it. And it comes in mighty handy for fixing loose casters, mending furniture, and hundreds of other repair jobs.

SEND FOR FREE BOOKLET!

SAVOGRAN CO., DEPT. P-A, INDIA WHARF, BOSTON

SAVOGRAN CRACK FILLER

WILL NOT SHRINK!

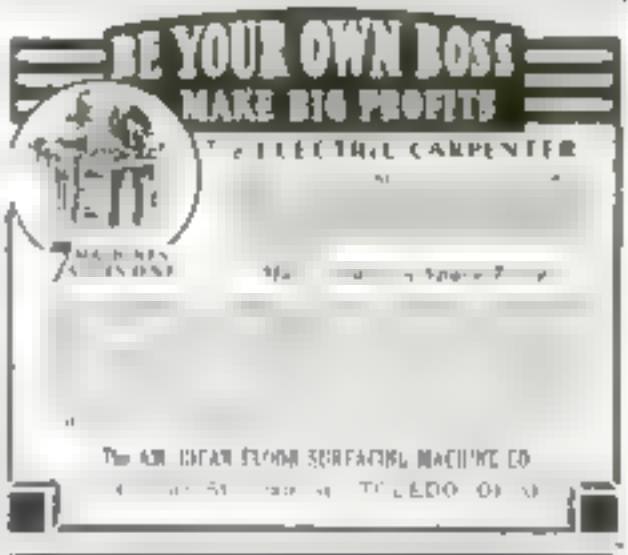

IT'S EASY TO MAKE BIG SPARE TIME MONEY

Send for our free plan on how to make $5.00 to $15.00 a week in your spare time by taking orders for POPULAR SCIENCE MONTHLY from your friends. No selling required. Turn extra hours into extra dollars.

POPULAR SCIENCE MONTHLY
353 Fourth Ave. New York, N. Y.

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 8.

FOR many generations and in many countries, American Screws have played an important part in building and repair work. It is safe to say that the same will be true in the future, because the name American Screw Company stands for quality in screws of all types for all purposes.

Our reputation is an "insurance policy"—it insures you against inferior screws.

You can do any job better with American Screws. Ask for them by name.

WOOD SCREWS | MACHINE SCREWS | STOVE BOLTS | HEX BOLTS

AMERICAN SCREW CO.
PROVIDENCE, R.I., U.S.A.
WESTERN DISTRICTS WEST BROADWAY SALES OFFICE, CHICAGO, ILL.

"Put It Together With Screws"

IS NEW RUSSIA, BUILT BY AMERICANS, A WORLD MENACE?

(Continued from page 22)

and steel center outside the United States.

At Cheliabinsk, a step in the Urals, they are building the world's largest tractor plant.

At Arbest, in Siberia, a New York engineer, almost alone, is developing a thirty-square-mile asbestos deposit containing 1,000,000,000 tons of the valuable mineral.

These five man-sized jobs are among the main props of the Five-Year Plan. If they succeed, the plan will work. If they fail, the whole scheme will blow up. There seems to be a fifty-fifty chance of failure. Progress already made on some of them indicates that it will take only four years, instead of five, to complete them.

BESIDES, the American engineers are opening mines, turning rivers, drilling oil wells, tunneling mountains, bridging streams, cutting roadbeds, erecting and equipping power plants, and building and putting into operation factories of all kinds all over Russia.

They are doing this in a country as large as the entire North American continent which, under the Czar, had fewer factories than the state of Pennsylvania, and those few old-fashioned and small. In 1921, as a result of revolution, civil war, and famine, these factories were producing only seventeen per cent of their pre-war output.

American engineers and American machinery got to Russia in 1928. Last June, when they had been there two years, production had climbed to 180 percent of that of 1913, or more than ten times that of 1921.

This is the prospect in which economists find disturbing factors. Can this great development be kept within bounds, or will it break out by its own right to bring havoc and ruin to all Europe and possibly America? Few at present are daring enough to answer these questions.

Today the Five-Year Plan looks like a success, though the final success of the communist government is still doubtful. It is true that the land has been nationalized, that virtually all trade is in the hands of the state. But all progress in industry has been won by means of hated capitalist methods and with capitalist machinery and brains.

Until recently, the railroads were a clock of flies in the industrial ointment. From the Czar's regime the Soviet took the largest and poorest managed railroad system under one control in the world. It consisted of 60,000 miles of run-down track, 17,000 locomotives, dilapidated beyond use, more than 1,000,000 employees, and no service to speak of. In miserable shape the system broke down completely under the strain of the feverish activity of the last two years.

AGAIN the Soviet called in an American expert to set things to rights. A few weeks ago Charles A. Tobi, superintendent of motive power of the Baltimore and Ohio Railroad, sailed for Russia to reorganize the system and operate it according to American methods. He will be gone one year.

In that time, he will spend $900,000,000 of the Soviet's money for increased tracks, new equipment, plants, and repairs. Under him will work a force of 150 American railroad men, including specialists in everything from superintendents and shop foremen to trainmasters and signal men.

Among the projects now being directed by Americans is the giant hydroelectric power dam in the River Dnieper, at Kichkas, in the Ukraine, 200 miles from Odessa. There Col. Hugh L. Cooper, builder of the Wilson Dam at Muscle Shoals and chief engineer of the Niagara (Continued on page 126)

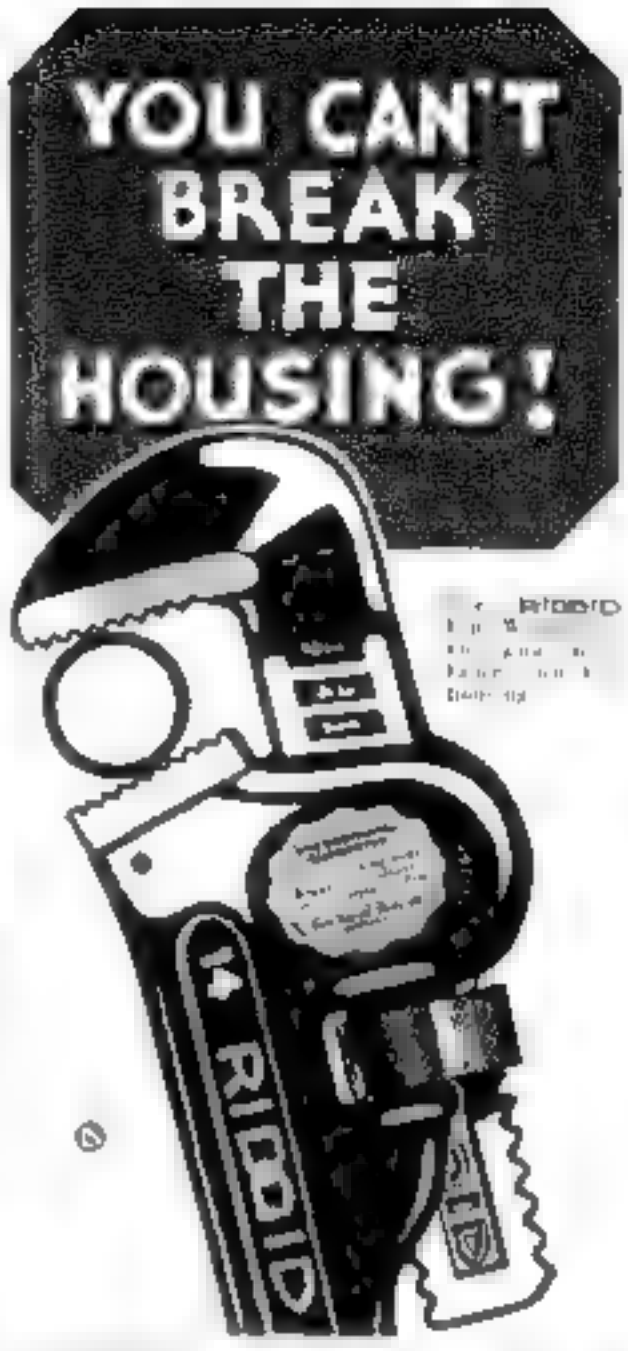

IF YOU want a pipe wrench to stand punishment, buy a RIDGID. You can't warp or break the housing—even if you bend pipe with it. No more bother with broken housings or the expense of repairing them.

You get also a *replaceable heel jaw; full floating hook jaw, with pipe scale;* adjusting nut that turns easily in wide open housing; comfortable, stout I-beam handle with hang-up hole. And others.

Get just one RIDGID at your Hardware Store or Tool Dealer's and enjoy a new pipe wrench experience. You'll find that a regular 48" RIDGID for "Big Jobs" is a example of how well the remarkable RIDGID design fits the engineering

RIDGID
PIPE TOOLS

Stamps to The Ridge Tool Co., Elyria, Ohio
Please send me sample 48" RIDGID Wrench.
20¢ enclosed.

NAME

ADDRESS

"You, too, can SELL ARTICLES telling how to make things"

Captain McCann seated at his Corona

says

E. ARMITAGE McCANN

famous ship modeler

CAPTAIN McCANN is just one of many Popular Science readers who have turned a hobby into profits by selling articles on how to make things.

Like most writers, he uses a Corona.

To help you write *money-making* articles, let us send you Free the Writer's Guide. Tells you how to write them and to prepare manuscripts for publication.

Of course, you'll need a typewriter a CORONA. Simple, rugged, compact—throughout 22 years the choice of a million users.

If you have a typewriter now, we'll take it in trade for a new CORONA.

Coronas priced $39.50 and $60.00, including carrying case. Convenient payments, if you prefer.

Capt. McCann in his workshop, where he builds his beautiful accurate models.

CORONA *Standard Keyboard*

I. C. Smith & Corona Typewriters Inc.
Dept. 1 D 51 Madison Ave., New York City
☐ Send Free Writer's Guide
☐ Send Free Descriptive Booklet
☐ Quote allowance on my _____ typewriter No. _____
Name _____
Address _____

IS NEW RUSSIA, BUILT BY AMERICANS, A WORLD MENACE?

(Continued from page 125)

power development, is doing the biggest job of his career. With a staff of five American engineers and an army of 17,000 workmen, he is constructing a plant that will eclipse those at Muscle Shoals and Niagara.

Imagine one power plant supplying electric energy to an area as large as the six New England states of Maine, New Hampshire, Vermont, Massachusetts, Connecticut, and Rhode Island put together, and you have an idea of the size of this job. When completed, it will furnish 2,500,000,000 kilowatt hours of energy a year to a territory of 70,000 square miles. The Soviet says that in time this will be a teeming industrial section with a population of 5,000,000. At present, only 1,000,000 people are living there. But a new city, to house 500,000, first of a string of modern factory towns, is rising on the river bank.

THE plant will increase Russia's power output five-fold, putting it in third place, instead of tenth, among power producing nations, with only the United States and Germany ahead of it. The dam will be one and a quarter miles long, 200 feet high, and will contain 1,150,000 cubic yards of concrete. There will be a power house 820 feet long with nine turbines of 85,000 horsepower each and an ultimate combined capacity of 850,000 horsepower. Muscle Shoals produces 620,000 horsepower. The turbines, built by the Newport News Shipbuilding and Drydock Co., are the largest in the world. Those at Niagara, generating 75,000 horsepower each, come next.

The great dam, as a navigation project, was planned as early as the second half of the eighteenth century, in the reign of Empress Catherine the Great. Afterwards it was taken up under several of the Czars, but nothing ever came of it.

It was left for the Soviet, aided by American engineering ability, to make a real start. Half of the huge job on the Dnieper now is finished. Working at top speed in five-day, nonstop weeks, the 17,000 men so far have placed more concrete than was ever cast in a similar period in the history of engineering. With 114,400 cubic yards placed in one month, the men under Colonel Cooper's command last September smashed the Muscle Shoals record of 68,900 cubic yards placed in one month. Since then, they have bettered their own record. In October and November they placed more than 144,000 cubic yards per month.

THE vast majority of these 17,000 men, of course, are Russians. It is a safe bet that not 100 among them ever heard of Muscle Shoals. They were not out to break the record of the American workmen and set up a new world's record in concrete placing.

Colonel Cooper and his staff know how to get work done. But if you think that would be sufficient to make Ivan Ivanovitch, the average Russian, the "John Jones" of Russia, throw off his indolence, you don't know Ivan. At the Dneper dam, as on all other big jobs now under way in Russia, he is plugging away for dear life for reasons of his own.

What are these reasons? Why this sudden energy and zeal? Wages in Russia are low. A skilled workman makes an average of about $42 a month, an unskilled man gets only $32. As nearly all wheat, meat, butter, and eggs are shipped out of the country, food is scarce, poor, and expensive. A pound of bad butter in Moscow today costs from $1.50 to $2, *(Continued on page 127)*

Easy-to-use

Plaster for patching

Rutland Patching Plaster makes it easy to patch that crack or hole in wall or ceiling yourself. Just add water, then apply. Doesn't set fast like plaster of paris. Gives you time to smooth it in place. Permanent. Won't shrink, crack, swell or fall out. Takes paint or wallpaper perfectly, won't show through. At paint or hardware stores. Made by Rutland Fire Clay Co., Rutland, Vt.

RUTLAND

PATCHING PLASTER

START A SHOP!

with a **CABINET SHOP SPECIAL**

Includes 16" band saw, 6" jointer and 8" circular rip and crosscut saw.

$247

Without power

Nobody gets rich on a salary. Open a shop of your own and reap all the profits for your labor. Write today for our complete [illegible] A circular describing the Parks Production Plan, and how with little capital and one of these woodworking machines you can also be real boss of your own shop!

The Parks Woodworking Machine Co.

[illegible] Knowlton St., Cincinnati, Ohio
[illegible]
Canadian factory: 328 Notre Dame East, Montreal

PARKS

IS NEW RUSSIA, BUILT BY AMERICANS, A WORLD MENACE?

(Continued from page 126)

a pound of tough beef costs about $1.50.

The great mass of the people live on black bread, the only food that is plentiful, fish, and vegetables.

Since all business is in the hands of the state and the government imports nothing but machines, clothes are hard to get, and shoes are at a premium. Despite all this the average Russian workman last year did half again as much work as he did in 1913 under the Czar. What is the secret?

WE, in the United States, often are accused of having the almighty dollar. Most of us do nothing of the kind. What we seek is security. Human nature in Russia essentially is the same thing as in America and anywhere else. The Soviet leaders seem to be thoroughly aware of this human trait and so, to begin with, they have given Ivan security. True, he only makes, say, $42 a month. But he is taught that he will get a government pension when he is too old to work. When out of a job, he receives unemployment insurance. As a matter of fact, instead of unemployment, Russia today has an actual labor shortage.

When Ivan is sick, he gets free medical treatment. When his wife has a baby, she is taken care of, free of charge, at a government hospital. Each year he gets two weeks vacation with pay. If he works in a mine, or at an extra hazardous job, he is given a month's vacation. He has a day off every five days. He never works more than seven or eight hours a day.

In case of serious illness, or as a reward for extra effort, he is sent, at government expense, to the "Red Riviera"—Yalta in the Crimea, a wonderful country with a climate like southern France, where he lives and plays in the old palaces of the Czars and the nobility, now changed into workingmen's hotels, clubs, and sanitaria.

These benefits amount to about twenty-seven percent of Ivan's wages. But his pay itself, low as it is when you judge it by American standards, is sixteen percent higher than it was before the war. In other words, Ivan not only has stopped worrying about the future, but he actually is better off today than he ever was.

Ivan's privations are serious only when looked at with American eyes. It is true that black bread is his main dish for breakfast, lunch, and dinner. It is true that there are tens of thousands of children in Russia who never have seen a piece of candy, and that the vast majority of girls and women don't know what it is to wear silk stockings. But don't forget that Ivan, his wife, and children never had luxuries, or even comforts. All the bacon and eggs are sent out of the country, but Ivan never had bacon and eggs. He never at any time had much more than his black bread. The difference is that now he gets it regularly—two pounds a day as long as he works.

THE Soviet has given Ivan more than security. It has given him more freedom than he ever dreamed of. It has given back to him his beloved vodka, which the Czar took away during the war. It has changed the marriage and divorce laws to suit his temperament. Today he can get married merely by taking his sweetheart to a government registry office. If that is too much trouble, a common law marriage is just as legal.

When either he or his wife wants a divorce all that is necessary is for one or both to go to a government (Continued on page 128)

Profit by the Experience of these Men

Every year thousands of men buy bench machinery for the first time. Some of them use judgment and select the type of machinery they buy. Others profit by the experience of men who have made a life-time study of bench machinery exclusively and buy BOICE-CRANE. You can do the same. There is a host of BOICE-CRANE users who will tell you there is a good, substantial and practical reason. You can get the same machinery as the BOICE-CRANE. These engineers guarantee it.

William B. Boice

John E. Boice

N. B. Crane

Buy Now Pay Later

Universal Handisaw $30

Wonderful saw. Will rip, cut, dado, bore, mitre, rabbet, panel, mold and mortise.

New Plan—Shop Pays for Self

The most unique plan ever presented to hundreds of thousands of readers. Here are just a few of many features. **1st**—You ask us to send you full particulars. We ship machine and give you 10 days to test and decide. **2d**—We send you free a valuable booklet telling how to make money in your shop. We do the writing. **3d**—You get orders for us and make big profits in your shop. Makes it easy to own the best equipment. We have helped thousands of people. You can get testimonials. In your letter to us be sure state whether you want details of this plan.

12" Band Saw
Less Guard
$32.50

Table tilts 45 degrees. Saws 2½" thick. Ripping attachment. Very rigid. Blades for wood, metal or composition.

Less Guard
$25

Ball Bearing
New 4" Jointer

Long table. Wide rabbet. Graduated fence.

Brand New Shaper



ONLY $49

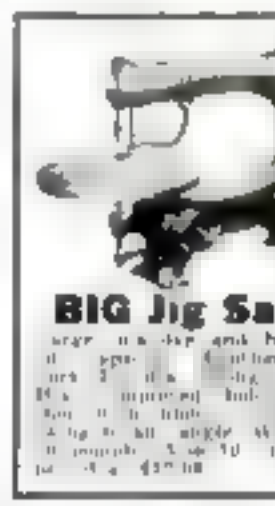

BIG Jig Saw

FREE

Write for Boice-Crane Catalog. A great value. Book filled with Hundreds of Handisaw and All tools for the asking.

W. B. & J. E. BOICE, Dept. P S.-4G, Toledo, O.

ALUMINUM BOX SHIELDS

ANY SIZE TO ORDER
COIL SHIELDS, SHIELDED WIRE, etc.

BLAN, THE RADIO MAN, INC.
at Cortlandt St. Dept. P New York City

BURN YOUR NAME ON TOOLS
WITH THE
ARKOGRAF
Protect Your

ARKOGRAF PEN CO.

THIS BOOK tells you how

Do you know how to build a workbench, how to carve wood, how to sharpen all your tools? The Stanley Book No. 15 "How to Work with Tools and Wood" tells you how to do these and hundreds of other things with tools. 176 pages of information for anyone interested in a home workshop. Sent only $.10 for postage.

Costs only $1.00

THE STANLEY RULE & LEVEL PLANT
New Britain, Conn.

STANLEY TOOLS

A CLIPPER SHIP MODEL for ONLY $4.00
The Famous FLYING CLOUD

All parts, including sails, cut to fit and easily put together by following detailed instructions and numbered diagrams. Send for FREE illustrated catalog of many other models. Santa Maria, Mayflower or La Pinta $4.50. Constitution $6.00. Coach models and covered wagon $4.50. Sent by parcel post C.O.D. to U. S. or Canada.

Canadian Branch,
80 King St. W. Toronto
Canadian prices, duty paid, slightly higher.

"YOU CAN BUILD ONE"
MINIATURE SHIP MODELS, INC.
Dept. NA, Perkasie, Penna.

Have You Seen this?

We want every reader of Popular Science Monthly to get this book

Every Man—

who uses edged tools will find real helpful information in this new 36-page illustrated booklet, "How to Sharpen Wood-Working Tools." Out of the background of long experience and full knowledge Emanuel E. Ericson has written a book that deserves a place in every man's tool box.

Sign and mail the coupon below and we will send you a copy free. Remember that your local hardware dealer can supply you with these sharpening stones.

CARBORUNDUM
BRAND
Sharpening Stones

FOR YOUR

Chisels • Gouges • Hatchets
Draw Knives • Scraper Knives
Wood Carving Tools
Floor Scrapers • Knives

THE CARBORUNDUM COMPANY
NIAGARA FALLS, N. Y.

Please send me the 36-page Booklet P-1, "How to Sharpen Wood-Working Tools."

Name _____

Address _____

City _____

IS NEW RUSSIA, BUILT BY AMERICANS, A WORLD MENACE?

(Continued from page 127)

bureau, and immediately the union is dissolved. No grounds are required. The only restriction is that the father must take care of his children.

The communist leaders have inspired Ivan with their own fanatic zeal for the "cause." They have made him feel that he no longer works only for himself and his family, but for the common good as well. They do this with every means at their command. Russia today is a country of incessant rallies, meetings, parades.

FINALLY, they have given him hope. By 1933, they have told him, Russia will be a land of plenty, overflowing with milk and honey. Ivan believes it, and he is straining with every ounce of his power to bring about this paradise. At the same time, with his eyes upon the rest of the world, hoping to thrust his regime upon other nations, he views himself as a crusader.

These are the main reasons for the new amazing display of energy. These are the incentives of the army of men now working day and night to complete "Russia's Detroit," fifteen miles from the old city of Nijny Novgorod, in central Russia, east of Moscow. Half a year ago, a handful of peasants lived on the site. Today, 10,000 men are erecting the great Soviet automobile assembly plant and the "first model communist city."

American engineers are in charge of the giant job. Nineteen engineers of the Austin Company, of Cleveland and New York, are directing the work of building the factory and the new town. Foundations for the plant, which will be 2,000 feet long, one of the longest buildings in the world, have been laid. Several of the apartment blocks in the model city are finished.

The model city, scheduled to be ready for 25,000 by the end of this year, will include up-to-date dwelling blocks, parks, schools, hospitals, clinics, restaurants, communal kitchens, libraries, theaters and a "palace of culture." One of the striking features of the city lies in the fact that the apartment houses will be planned so that children on their way to school will cross no traffic lanes. There will be no churches, as the Soviet government aims to abolish organized religion.

This remarkable city is not being built for the wealthy and their children, for there are no wealthy people in Russia. It is being built for the Russian workman, his wife and his children. Now he dreams of riding around in his own cheap automobile, of having long hours of leisure, of enjoying to the full a chance to rest himself.

If these dreams are realized, what then? Will he and his sons be satisfied to remain Russian workmen? Similarly will his leaders be content with what they have wrought in their own nation or will ambition for world dominion seize them? These questions, and many, many others, are passing through the minds of world statesmen who are watching and wondering while the Soviet executes its plans for making a new nation.

How is Russia preparing to carry on its vast industrial job after the American engineers leave? What is being done to bolster Communism, to make it permanent? How are Stalin and his associates guarding against another revolution? How does the average Russian feel about easy marriage and easy divorce? These questions will be answered in May POPULAR SCIENCE MONTHLY, *on sale April 1*

"Sure, I'll fix it!
a soldering job can't bluff me now!"

"You're *almost* as good at fixing things as I am, Tom, but I'm one jump ahead of you. I do my own soldering now, because Kester has made soldering a *cinch*."

That's right. You don't need to be buffaloed by soldering any longer. Buy a can of Kester Metal Mender from your dealer. It carries the right flux for general soldering *inside itself*, so that all you have to do is apply heat. You'll get perfect results, too—a skilled mechanic couldn't do any better. The next time you make something that needs to be soldered, or are repairing anything around the house, use Kester Metal Mender. Kester Solder Co., 4201-05 Wrightwood Ave., Chicago, Ill. Incorporated 1899.

Write for a Free Sample

KESTER
METAL MENDER

The Boat of your Dreams
in your spare time this winter at ½rd usual cost

BROOKS BOAT COMPANY, Inc.
Dept. P-D Saginaw West Side, Michigan

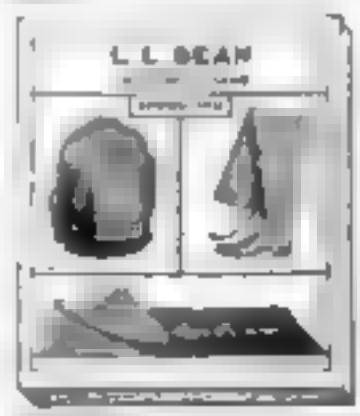

FREE CATALOG
Just off the Press
Fully illustrated—showing footwear, clothing, and camping specialties for fishermen and motor campers.
L. L. BEAN
247 Main St.,
Freeport, Maine

New Fountain Pen-Pencil

With compass. Guaranteed for life. Money back if not pleased. Sells for $1.25
Send Only
39c

WRITE for FREE Wholesale catalog, showing over 100 fast sellers. Money back guarantee.
SPORT DEPT. CO.
121 Frank St., Lemoyne Center, Minn.

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 8.

AIR HUNT FOR GOLD

(Continued from page 35)

little village among the dense trees, completely sheltered from the view of a flyer, as was the trail that led to it. There, the village chief gave Long a diminutive burro, the village's only beast of burden, and walked beside him as Long rode in state toward Iguala. Shouldn't he ride in state on the chief's animal? Was he not the emissary of the white god who made people well, and had he not dropped from the air like a bird?

With their expressive signs, the Indians made it clear they had seen Long as he dropped from his plane. They had him under surveillance from the time his feet touched the earth. Long shuddered remembering what had happened to his companions on his visit four years ago. But the charm had worked. The white god was effective.

NEAR Iguala, staked down on a plateau about an acre in size, was the great bird from which the new white god had dropped. The chief turned his burro and, without a word or sign, started back on the long trail to his village that guards the city which Long believes was the last stand of the Mayas.

Back at his home, Long is preparing for an expedition. It will start this month, he told the writer, going by air to the little plateau near Iguala. Then it will proceed on foot to the mountain, and there it will uncover the home of a people long vanished.

Heading the party with Long will be Dr. Monday, whose private collection now holds priceless relics of a forgotten age given him by natives as a tribute to the white god's healing power.

Thus another bit may be added to the rapidly growing knowledge of the mystery race of the North American world, the Mayas. Five hundred years ago, the lower Mexican peninsula was thickly populated with this great race, some estimates running into millions. These Central American Indians, perhaps the most civilized people of the New World, were adept at textile making and at astronomy and architecture.

The Mayan city of Tulum, on the east coast of Yucatan, has been restored by the Mexican government with the cooperation of the Carnegie Institution. A tremendous temple, classic in its beauty and architectural fineness and the quality of its glistening white limestone; a great court where games were played, a huge astronomical observatory, elaborate sculpture of monoliths, pyramidal places of worship, and palaces—all have been recovered from the ruins.

AFTER the advent of the Aztecs, many of the Maya cities were buried. The Aztecs, like the Mayas, did not use beasts of burden other than men. Endless chains of sweating slaves, carrying baskets full of earth, buried from sight the marvelous structures which are now arousing the admiration of the world.

Somewhere in the southern part of the peninsula, after they had been driven from Yucatan and Tabasco and Chiapas, the Mayas made a stand. There they gathered in their last fight against extinction. There they herded up their slaves, there they built their last "capital" and their last defense against the hordes of Aztecs.

It is believed the Sierra Madre city, built on a niche in the hills and with entrances through the mountains from north and south, is that city. It is believed that there lies the treasure of a civilization that was more highly advanced than that of any other Occidental people. It is believed that there, in greater measure than anywhere else, is the secret of the Lost People of Maya.

Real Woodworking Efficiency with *Delta* Motor-Driven Tools

THEY SAVE TIME and LABOR—produce better work

There is a new thrill in woodworking these days. Motor-driven tools have taken out all the drudgery and the tiresome "elbow grease" from working with wood and left only the sheer pleasure of making things quickly, easily and beautifully. Motor-driven band saws and circular saws have supplemented the hand saw; motor-driven jointers are replacing the hand plane; motor-driven borers and routers are eliminating hand drills and chisels. For this is a modern age . . . and the modern way is the motor-driven way!

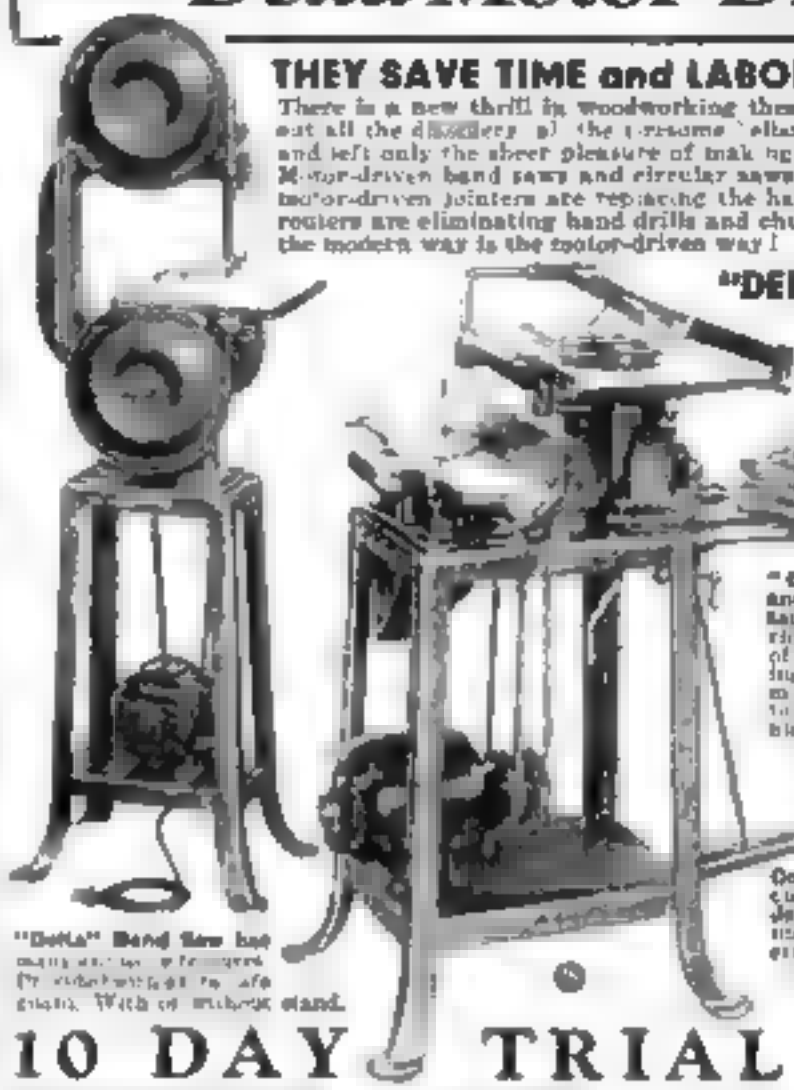

"DELTA" quality—what it is

"Delta" Band Saw has many advantages for wide cuts. With or without stand.

"Delta" Boring and Routing Attachment makes mortising a child's play. Easy to operate. Furnished separate, if desired.

"Delta" Combination Circular Saw and Jointer — Each unit may be operated separately with or without motor.

Complete DELTA 1931 Line Includes

- ☐ Woodturning Lathes
- ☐ Complete Hand-Shop
- ☐ Jointer
- ☐ Circular Saws
- ☐ Band Saw
- ☐ Mortiser and Router
- ☐ Moulding Cutter
- ☐ Scroll Saws

Check the items in which you are interested and mail with the coupon below.

10 DAY TRIAL EASY

Send coupon today for complete details and FREE illustrated literature describing the new 1931 "Delta" line of woodworking tools. Try any tool home for 10 days AT our risk. Easy Payment Plans. Mail the coupon TODAY!

Delta Specialty Company

DIVISION OF DELTA MFG. COMPANY

2779 N. Holton St. Dept. B431 Milwaukee, Wis.

DELTA SPECIALTY CO., 2779 North Holton Street, Milwaukee, Wisconsin Dept. B431

Gentlemen: Please send me FREE illustrated literature describing all "Delta" tools including the new 1931 "Delta" line, complete details of 10-day Trial offer and Easy Payment Plans.

Name .....

Address .....

City ..... State .....

UNIVERSAL SPEED SAW

Amazing New Attachment Fits Any Electric Drill

Just [illegible] fits the chuck and presto! your drill is in a jiffy a fine [illegible] saw that will [illegible] in wood, plastics, fibre, metal, bone, ivory, etc. Blades only

$15

A New Powerful Wood and Metal Saw and Filing Machine

Not a mere jig saw but a truly accurate machine capable of doing heavy [illegible] as speedily as [illegible] Cuts wood, plastics, metal, bone, ivory, etc. Blades only [illegible] thick without stopping. Has [illegible] Adjustable stroke long for wood, short for metal. No [illegible] of blades or table adjustments. Saves the work of filing machine. Bring it at the low price of

$35

UNIVERSAL MOTOR SAW

Write for details coupon now, or better order today.

WYZENBEEK & STAFF Inc.
486 S. Hoyne Ave., Chicago

Choose Radio Parts The Experts Use!

HAMMARLUND Condensers, Screen-Grid Coil and Choke form the backbone of the Three-Tube A. C. Broadcast Receiver featured in Popular Science Monthly

There are more than 30 years of engineering experience back of Hammarlund Products—30 years of pioneering in the field of the telephone, telegraph and radio.

Even with such a rich background of quality and a world-wide reputation, Hammarlund Products are priced low. Your dealer sells them.

Write Dept. PS-4 for Literature

HAMMARLUND MFG. CO.
424-438 W. 33rd St., New York

For Better Radio
Hammarlund
PRECISION
PRODUCTS

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 8.

General view of one section of our Service Department, showing students doing actual work on various Radio Receivers

LEARN RADIO--TELEVISION

NOT By BOOKS Or CORRESPONDENCE - By

Don't spend your life slaving away in some dull, hopeless job! Don't be satisfied to work for a mere $20 or $30 a week. Let me show you how to make **real money** in Radio—the fastest-growing, biggest **Money-Making Game on earth!**

Golden Opportunities

Paying $60, $70 and Up a Week

Jobs as Designer, Inspector and Tester paying $3,000 to $10,000 a year—as Radio Salesman and in Service and Installation Work, at $45 to $100 a week—as Operator or Manager of a Broadcasting Station at $1,800 to $5,000 a year—as Wireless Operator on a Ship or Airplane, as a Talking Picture or Sound Expert—THOUSANDS of OPPORTUNITIES LEADING to SALARIES of $60 A WEEK AND UP!

NO BOOKS -- NO LESSONS

All Practical Work

Coyne is NOT a Correspondence School. We don't attempt to teach you from books or lessons. We train you on the finest outlay of Radio, Television and Sound equipment in any school—on scores of modern Radio Receivers, huge Broadcasting equipment, the very latest Television apparatus, Talking Picture and Sound Reproduction equipment, Code Practice equipment, etc. You don't need advanced education or previous experience. We give you—right here in the Coyne shops—all the actual practice and experience you'll need. And because we cut out all useless theory, you graduate as a Practical Radio Expert in 12 weeks' time.

TELEVISION IS NOW HERE!

And Television is already here! Soon there'll be a demand for Thousands of Television Experts! The man who learns Television **now**

Instructor explaining principles and operation of a Talking Picture Machine

MAIL COUPON ON OPPOSITE PAGE

Students operating our modern Broadcasting equipment. In the rear you can see our Sound Proof Studio Room

TALKING PICTURES in 10 WEEKS

Actual Work-In the Great Shops of Coyne

can make a FORTUNE in this great new field. Get in on the ground floor in this amazing new Radio development! Come to COYNE and learn Television on the very latest Television equipment.

Talking Pictures — A Great Field

Talking Pictures and Public Address Systems offer thousands of golden opportunities to the Trained Radio Man. Here is a great new field of Radio work that has just started to grow! Prepare **now** for these marvelous opportunities! Learn Radio Sound work at Coyne on actual Talking Picture and Sound Reproduction equipment.

EARN AS YOU LEARN

You get Free Employment Service for life. And don't let lack of money stop you. If you need part-time work while at school to help pay living expenses, we will gladly help you get it. Many of our students pay nearly all of their expenses that way. You can find out everything **absolutely free** by simply mailing the coupon below.

COYNE IS 32 YEARS OLD

Coyne Training is tested, **proven beyond all doubt.** You can find out everything **absolutely free.** How you can prepare for a good job or how you can go into business for yourself and earn from $3,000 to $15,000 a year. It costs **nothing** to investigate! Just **mail** the coupon for your copy of my big Free book!

H. C. Lewis, Pres. **RADIO DIVISION** Founded 1899

COYNE ELECTRICAL SCHOOL

500 S. Paulina St., Dept. 41-4H, Chicago, Illinois

Students operating and adjusting our modern Television Transmitting equipment

FOR BIG FREE BOOK

H. C. LEWIS, President
Radio Div. Coyne Electrical School
[redacted]
Send me your Big Free Radio Book and all details of your Special Introductory Offer. This does not obligate me in any way.

Name .....

[redacted] .....

City .... *State* .....

IF YOU CAN USE AN EXTRA $20.00 BILL

write for this

FREE BOOK

YOU can save $20.00 in no time by using

SMOOTH-ON No. 1

to do your own household repairing—and in addition you will have that proud "I-did-it-myself" feeling.

Here is what one enthusiast did with two 35-cent cans.—A $25 lamp stand loose in base, two big leaks in heating furnace smoke pipe, loose hammer handle, and three loose hooks in tiled bath room wall were all put into good usable condition at an average cost of 10 cts. for each repair—and $20.00 easily saved over what would have been paid to professional fixers or for new parts.

You can use Smooth-On to make dozens of home repairs simple. Try it the next time you have a leak in steam, water or gas pipe, boiler, furnace, radiator, hot air duct, etc.

Seals holes in pails, sinks, tanks. Makes loose handles tight. Enables you to fasten brackets, shelves and hooks in masonry walls. Makes loose screws, anchor bolts, nuts, locks, hinges tight.

Smooth-On does not deteriorate. Keep a can in your home and you will be repaid many times over.

On the Automobile

Smooth-On No. 1, being unaffected by water, oil, gasoline or heat, is also excellent for automobile repair. Try it for stopping radiator leaks, pipe line and hose connection leaks from the outside, keeping exhaust line connections tight to prevent the escape of poisonous burnt gases from the cracked water jackets and crankcase on different cases keeping grease caps in front of transmissions, nuts and hub caps from freezing and falling off, tightening loose hinges, robe rails, etc.

The FREE Smooth-On Repair Book

will show you how an astonishing number of home and automobile repairs are as easy for you to make as for somebody else.

Mail the coupon for a free copy and get Smooth-On No. 1 in 2-oz. or 1 or 5-lb. can from any hardware store or if necessary direct from us.

Smooth-On Mfg. Co.
Dept. 58. 574 Communipaw Ave.
JERSEY CITY, N. J.

Do it with **SMOOTH-ON**

SMOOTH-ON MFG. CO., Dept. 58.
574 Communipaw Ave., Jersey City, N. J.

Please send the free Smooth-On Repair Book.

Name .....

Address .....

4-31

Return this coupon for a FREE copy of Booklet

FINDS WAY TO TUNE RAYS OF ULTRA VIOLET

Continued from page 43.

germs. According to his theory, any such effect should start abruptly at a certain wave length and continue for shorter ones. All he wanted was a chance to try it and see.

The trustees of the university were less enthusiastic than the president, but eventually they found a place for Sperti to work. It was a large garret used by the janitors for storage!

Sperti chased out the janitors and began his pioneer experiments. One of them startled his friends.

DELIBERATELY Sperti starred himself in order to prove that one brand of ultra-violet light was fatal to human tissue and another was not. One day in his laboratory, he stood in front of a powerful sun-sunlight lamp. Fastened to his forearm, placed squarely beneath the lamp's intense rays, was a cardboard mask with a star-shaped hole cut in it.

Repeatedly Sperti exposed his arm beneath rays he felt sure, from his calculations, would be fatal to human skin. Also, he exposed other patches of skin to ultra-violet rays fully as intense, but not of the dangerous wave length. Five times, in all, he exposed his arm. In consequence he carries today the branded mark of the star *wherever the rays his calculations warned him against had struck him.* The others had no effect!

This unique test not only showed Sperti he was on the *right* track, but it also revealed facts of interest to every sunbather.

The first three exposures were beneath filters transmitting rays like the ultra-violet in normal sunshine, the shortest of the three, however, is found only on high mountains. They left no mark, a slight mark, and a very red patch of sunburn respectively. Later tests showed that each of these wave lengths form beneficial Vitamin D in the human body.

The shortest two wave lengths of ultra-violet that Sperti tried have no equivalent in Nature, at least, not on this planet, where a thick blanket of air strains such short waves from the sun's rays. Only powerful electric lamps can generate them. These rays inflicted burns so severe that no human being could stand in them for long and keep on living.

What a happy arrangement of Nature it is, Sperti points out, that the air on the earth is just barely thick enough to bar entrance to these dangerous rays, and just thin enough to let through the healthful, rickets-preventing ones. Only a little change one way or the other, and we might be burned to death—or boneless.

ONE of the first fruits of Sperti's work with "tuned" ultra-violet rays was the discovery of a "death ray" for disease germs. Hunting down the particular ray in ultra-violet light that is responsible for sunshine's known germ-killing power, this scientific detective found it almost at the borderline of the sun's sheaf of rays. While germs in his laboratory basked unconcerned in glass dishes for days at a time beneath ultra-violet rays of longer wave length, they instantly perished when Sperti turned this ray upon them.

Encouraged by such triumphs, Sperti started on the trail of the elusive Vitamin D. Recently chemists had discovered that nearly all things animal or vegetable, including bread, milk, and the oil of human skin contain minute quantities of a powerful chemical called "ergosterol." It is this chemical upon *(Continued on page 133)*

ALLOY CHISEL SET

MADE OF **BOB CAT** SPECIAL ALLOY STEEL

A supremely tough, hard metal which holds an edge even when used for worst jobs imaginable. Set consists of four pieces, sizes ¼", ⅜", ½", ¾". Handsome black krinkle finish. Use this set JUST ONCE and you'll ALWAYS keep it handy.

Hinsdale Center Punch FREE if you order from this ad.

ONLY $1.95 *Per Set*
Plus Parcel Post C. O. D.

GUARANTEED *to give Satisfaction for a Lifetime*

Send No Money Just write: Send C. O. D. Parcel Post, one 4-piece Hinsdale Bob Cat Chisel set and free Hinsdale Center Punch. I'll pay postman $1.95 plus parcel post charges. Money cheerfully refunded if you're not satisfied.

HINSDALE MFG. CO.
Established 1918 227 N. Desplaines St., Chicago

A CLIPPER SHIP FOR $4.50
WITH ELECTRIC LIGHTS
27 inches long



C. J. Bierbower, Dept. P. S.
1310 Sartain Street, Philadelphia, Pa.
Or greater at Build-your-own ship models

Build a CLOCK

FREE BOOK shows How You Can Make Fine Clocks Right at Home

AMERICAN CRUDE CLOCK COMPANY
1001 S. Delaware St., Philadelphia, Pa.

MAKE YOUR INVENTIONS PAY

Millions have been made from ideas properly developed and protected by inventors. Our ... is the ... in the development of a practical working model.

Send us a rough sketch or model of your idea. We will make a complete report, backed by 30 years experience in model making. Confidential service. Write for free booklet. Bank references. Send for ... Write Now—Do It Today.

CRESCENT TOOL COMPANY Dept. 8, Cincinnati, O.



GEARS

In Stock—Immediate Delivery

Write for Catalog No. 214

CHICAGO GEAR WORKS
703-711 W. Jackson Blvd., CHICAGO, ILL.

SAMPLES OF 33 RARE WOODS

33 cabinet woods—$1.00
Beautifully labeled and postpaid.
Lumber dealers and industrial plants, architects, furniture manufacturers, and engineers
Send for illustrated catalogue
CRAFTSMAN WOOD SERVICE CO.
Dept. 1500 W. 37th St., Chicago, Illinois

A definite program for getting ahead financially will be found on page four of this issue.

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 8.

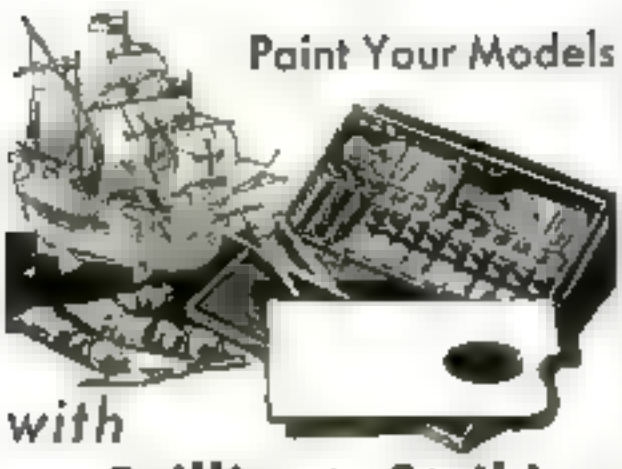

Paint Your Models

with

Brilliant, Striking

WEBER

Artists' Colors

Procurable in a broad selection of outfits in every price range or in separate tubes. The Pocket Oil Outfit pictured here contains all you need for giving that finishing touch to your models. Contains 12 tubes of color, palette, brushes, drying oil and turpentine put up in handsome lacquered tin box. *Price $1.10 at art stationery, hobby paint and department furniture stores.* Insist upon the name Weber for brilliance and long enduring beauty.

P. WEBER CO., INC., Philadelphia

BUILD MODEL SHIPS OF THE BETTER KIND

Special Construction Set and All Sorts of Parts for U. S. Destroyer Preston

MODEL SHIP SUPPLY COMPANY

Dept. L Mineola, N. Y.

LOOK FOR THE FULL NAME ON THE SHANK OF GENUINE

Russell Jennings ALGER BITS

AT GOOD HARDWARE STORES

The Russell Jennings Mfg. Co. Chester, Conn.

RED MASTER CRAFTSMAN

No. 1 A Junior

HESTON & ANDERSON 201 STONE STREET FAIRFIELD IOWA

Tool Chests

Machinists

Toolmakers

H. GERSTNER & SONS

The Midget "Five in One" Slide Rule

GILSON SLIDE RULE CO. Stuart, Florida.

A definite program for getting ahead financially will be found on page four of this issue.

FINDS WAY TO TUNE RAYS OF ULTRA VIOLET

(Continued from page 132)

which ultra-violet rays act, literally turning it into Vitamin D.

When Sperti set out to calculate the exact wave length of ultra-violet that produced this effect upon ergosterol, his figures produced startling results. They showed that the production of Vitamin D in ergosterol should begin at a certain wave length near the end of normal sunlight. Going down further, a point should be reached where the ultra-violet rays would *destroy the vitamin as fast as it formed.* Because of this you could only produce about ten per-cent of Vitamin D in ergosterol, instead of a hundred percent. Trying it out, Sperti found it was true. By avoiding or "tuning out" the destructive ray, he manufactured pure Vitamin D from ergosterol. When he fed minute quantities to rickets-afflicted chickens in his laboratory, they were cured with amazing speed.

NOW Sperti was ready to put vitamins in food, on a scale never possible before. He had his choice of two methods—to place the food itself under the lamps, or to add to it small quantities of treated ergosterol, which is tasteless. Special considerations prompted his choice.

It would be easy for him to put bread under the sunlamps and put the vitamin in it. But since the ultra-violet rays do not penetrate deeply, most of the vitamin would be in the crust. And many children throw away the crusts. So Sperti chose the method of adding "rayed" ergosterol to bread.

Putting vitamins in milk however was a different problem. As described before, the difficulty was that general "raying" spoiled the taste. Sperti traced this to a certain ray that formed ozone in the milk. He rejoiced to find that the taste-spoiling ray was safely outside of the band that produces the vitamins. Inserting the proper light filter, he was able to put the vitamins in without altering the taste.

An unexpected use for Sperti's process was found in preserving foods. Orange juice, for example, soon gets muddy and turbid when it is kept for any length of time. Grapefruit juice and tomato juice are other products for which manufacturers would be grateful for means of keeping. Here enzymes are the culprits. Sperti tried subjecting these juices to his "tuned" ultra-violet rays. Recently he exhibited a sample of orange juice so treated, kept for eight months, and still clear and of natural flavor.

Decay from other causes is equally easy for Sperti to prevent. He has merely to turn on his "death ray" and the germs die an untimely death.

IN other words, Sperti's experiments in preserving foods open new vistas of a time when, even more than at present, we shall be entirely independent of the seasons in choosing what to put on our dinner tables. Great warehouses stocked with preserved food will keep supplies available all the year round.

So varied are the applications of Sperti's rays that no one can say where they will end. Florists may use the new "tuned" ultra-violet light to grow better flowers. Poultry raisers should be able to raise bigger and healthier chickens on cheap, "rayed" poultry feed. These possibilities are to be investigated. For Sperti has come out of the garret. In recognition of this amazing young man's work, a huge new laboratory, equipped with the finest scientific equipment that money can buy, is being built for him. Here he will seek new ways to apply the wonders of his "tuned" ultra-violet rays.

If he didn't have clairs

A SCREW driver without the Non-Skid point is like a lion without claws—*it can't get a grip!*

The Non-Skid grips the sides of the screw slot—prevents slipping! This remarkable gripping power makes it so much easier and safer to drive and draw screws with the new Bridgeport Red Crown Non-Skid Screw Driver. So why continue to struggle with the smooth, slipping, slashing out-of-date screw drivers. Save time, temper and tribulation—"tool yourself up" with a Non-Skid today. It's GUARANTEED!

Made in 3 styles—all with blades of electric-furnace chrome vanadium steel. No. 1 (Blade runs clear thru handle) 4" 35c 6" 40c. No. 2 (Blade, handle and ferrule securely riveted) 4" 35c 6" 45c. No. 3 (Shockproof up to 18,000 volts) 4½" 45c 6½" 55c. If your dealer can't supply you, order direct.

THE BRIDGEPORT HDWE. MFG. CORP. Bridgeport, Connecticut

Red Crown

Bridgeport

NON-SKID

Screw Drivers

FIX IT *in a jiffy*

with new kind of wood you mould with your hands

THOUGH it handles like putty, it quickly hardens into wood and looks exactly like wood. It is wood—Plastic Wood you can easily mould with your hands and do repairing jobs that an expert cabinet-maker, carpenter or tinker would be proud of.

Never dries out. Never warps, shrinks, splinters or rots after it once hardens. You can plane it, carve it, turn it in a lathe and paint, lacquer or varnish its weatherproof, waterproof surface. It takes and holds screws, nails and tacks.

A loose chair rung or a weak chair back—a drawer pull that comes out—a loose caster—a broken toy—cracks in the floor or between bathroom tiles—holes in the floor—fix it yourself with PlasticWood and save a lot of money. At any paint, hardware or department store get a can or tube of Plastic Wood.

Big Book of Uses—FREE

You'll get a great big, profusely illustrated book of 48 pages crammed full of interesting uses for this remarkable new kind of wood that handles like putty, hardens into wood and comes in 9 different colors . . . if you mail this coupon.

SEND FOR FREE BOOK

THE A. S. BOYLE CO., Dept. 4-PS-16
Cincinnati, Ohio

Send me—free—big, illustrated book of uses for PLASTIC WOOD.

Name

Street

City State

POISONS THREATEN YOU AT HOME

Continued from page 133

diseases and sold a concoction which he called "Horsetail Tonic." It was made from the common "horsetail plant," and while not poisonous was of no value for treating the disease it was supposed to cure, so far as the Government experts could detect.

In another case, a farmer noticed that chickens ate sand and thrived on it. So he assumed sand was what the human system needed. He put up a preparation for sale which was composed of ninety-eight percent quartz grains with a little baking soda and cayenne pepper added. A second experimenter created a more palatable cure-all by reducing the sand content to eighty-seven percent and adding rock candy. Another amateur remedy, sold under the attractive name of "Health Ease," was found to be composed of ninety-five and a half percent pure lard, when it was examined in the laboratory.

WITH ignorant persons given a free run of poisons in preparing their nostrums, the danger of taking medicine without a doctor's prescription increases. Without competent advice, the temptation to take more than the usual dose is also greater.

Taking an overdose of a medical compound is only one of the dangers of poison in the home. There are many instances of people getting the wrong bottle from medicine cabinets stocked with poison-containing drugs, when reaching into it in the dark. Frequently it has been suggested that peculiarly-shaped bottles, or those studded with knobs or points, be required for all poisonous medicines, so they can be recognized instantly by the sense of touch. Often, preparations like tan and freckle removers, containing corrosive sublimate and ammoniated mercury, a powerful caustic poison, are kept on medicine cabinet shelves and may be mistaken for harmless drugs in the darkness.

However, the medicine cabinet is not the only source of poison in the home. Not long ago, a life insurance company in New York City issued statistics showing the menace to small children that lies in the lead paint that sometimes is used to color toys, cribs, and woodwork. Severe cases of lead poisoning have resulted when children sucked or chewed off such paint and swallowed it. The danger is greatest when the toys or cribs are recoated with a cheap grade of paint containing a large proportion of lead. The harmless-looking white, appearing sanitary, really is more dangerous than wicked-looking red, for example, because it contains greater quantities of white lead.

MANY of the new lacquers and enamels, which are put on by the spray process, eliminate the poisonous lead bases. One of the leading toy manufacturers makes a special advertising point of the fact that all his products are coated with paint that is entirely harmless.

Crayons are another conveyor of poison. Small children have sometimes mistaken them for stick candy and eaten them with serious results. Many such crayons contain chromium, a poison that thins the blood and turns it black. The cheaper varieties of artists' crayons and colors commonly contain arsenic. Other crayons contain white lead, and others Prussian blue, closely related to hydrocyanic acid, one of the most deadly poisons known.

In the large apple orchards of the country, lead arsenate is sprayed on trees and fruit to fight insects. If the apples are sold without being treated, the residue of this poison spray becomes a menace in the homes where they are eaten. *(Continued on page 135)*

NEW WOLLENSAK 350 POWER MICROSCOPE

$10.50

The convenient size, simple manipulation and precise optical qualities of this new microscope will appeal to amateur scientists, growing boy or girl, as well as the professional man.

NEW FEATURES

All-axis magnification from [illegible] to 350 power accurately graduated in steps of 50 power. Concave mirror—rack and pinion . . . tilting stand enabling microscope to be used in all positions . . . detachable base which simplifies the examination of any matter that cannot be conveniently placed on stage.

At your dealer or direct postpaid, $10.50
Money back guarantee.

Wollensak 50 to 350 power microscope with rack and pinion $10.00

Catalogue free.

Wide stand shown but for illustrating both

WOLLENSAK OPTICAL CO.
850 HUDSON AVE. ROCHESTER, N. Y.
Lens problems our specialty

Good and Good for You.

PUZZLES TO CAST LEAD SOLDIERS, INDIANS, TRAPPERS, [illegible] Wild and Farm Animals. 72 Wonderful Things to Make. Easy-to-follow instructions—no tools needed. Furnish all necessary materials. Send for Money-Back Guaranteed Catalogue

Henry C. Schierding, 1934-72nd St., Brooklyn, N. Y.

FANCY WOODS

We have in stock 80 kinds of hard and soft fancy woods for Inlaying, Models and Scroll work. Send 4c postage for List No. P. S. We also have an illustrated Catalogue describing our designs for Scroll Work. 25 cents.

H. L. WILD, 130 East 11 Street
Phone ALgonquin 4-6856, New York City

30 Days' Free Trial on all MEAD Bicycles

Mead CYCLE COMPANY CHICAGO

Tires

Write us today for free catalog

SHIP MODEL FITTINGS
of quality

We manufacture a complete line of ship model fittings for Sailing Ships, Yachts, Steamships and Naval Vessels.

Our illustrated catalog No. 7 will be mailed on receipt of 5c.

A. J. FISHER
Royal Oak, Mich.

1000 Ebenah Ave.

ALADDIN PORTABLE ELECTRO-PLATER

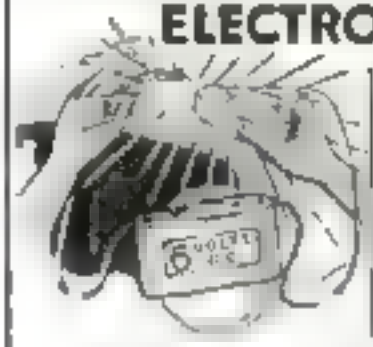

Introductory AGENTS OFFER $1.50

Instantly Applies Real Nickel

Also Electrically Plates Brass, Copper Silver, Gold Et

Make Big Profits With the Aladdin

P. J. P. BATENBURG CO.
Dept 302 Racine, Wisconsin

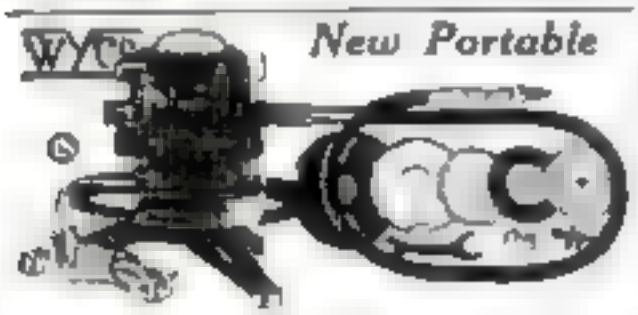

New Portable

FLEXIBLE SHAFT KIT

Every Craftsman—Mechanic Needs It

Handy for home work. For grinding, buffing, polishing, drilling, etc., also for engraving, etching, and light sawing. Complete with chuck and all accessories as illustrated. At your dealer or direct from the factory. $35

WYZENBEEK & STAFF, Inc., 406 S. Herne Ave. CHICAGO

Build- and Fly the IDEAL "EAGLET"

All balsawood (not cardboard) with many features of expensive models. Easy, quick construction, everything ready to put together, no glue or cement. Flies like a big one. Get one now and have some real fun.

28 in. Size Construction Outfit **50c** Postpaid

Send 5c for 80 pg. Catalog of Airplane Kits and Parts

IDEAL AEROPLANE & SUPPLY COMPANY, Inc.
23 West 19th Street, New York City



BUILD MODELS

In spare hours build 20" CHINESE JUNK. Our set supplies sacred Su... mast, painted flags, etc. for $2.50. Send 3c for new catalog of ships and cruisers.

ROY HANCOCK
2215 Douglas Ave., Portsmouth, Va.

Pyramid *The* HANDY BOTTLE CAPPER

Simple—compact—easy to operate. Seals perfectly. The modern way. At your dealers or send postpaid. $1

CROWN CORK & SEAL CO.
Eastern Ave. & Kresson St., Baltimore, Md.

POISONS THREATEN YOU AT HOME

(Continued from page 134)

It may produce double poisoning, as though both lead and arsenic were taken into the system. The usual procedure in removing this residue is to put the fruit through a mild hydrochloric acid bath.

At the Oregon Agricultural Experiment Station, Corvallis, it was found that sometimes the natural wax of the fruit, or the oil, when all sprays are used, forms a coating over the surface of the apple and prevents the acid from reaching the arsenical particles below. In order to discover a solvent that could be added to the bath to dissolve this coating, R. H. Robinson, chemist at the station, recently made a series of tests in which he tried out alcohol, acetone, benzol, carbon tetrachloride, kerosene, and gasoline. He found the most satisfactory bath was made by adding kerosene to the acid wash. This discovery practically eliminated the danger of poison spray residue remaining on apples that have been treated.

WHEN arsenic, lead arsenate, or other spraying materials are kept in the home, the hazard of poison is increased. There is always danger that such death-bringing dust may become mixed with food. Such an accident, just before Christmas, 1929, gave Government officials an exciting chase to recover nine deadly fruit cakes.

In Virginia, a housekeeper conducted a small retail business in home-cooked fruit cakes for the holiday. Nine of the delicacies were sold. A near-by neighbor was the first to open one. Six guests who tasted it were made violently ill. The remains of the cake was immediately sent to the Pure Food and Drug laboratory in Washington for analysis. Here, "Spot," a small fox terrier belonging to one of the scientists, proved the hero of the investigation. The physicians treating the sick people did not know what poison they were dealing with. In order to find out as quickly as possible, a small piece of the cake was fed to Spot. After nibbling a taste, he was attacked with the violent, explosive type of vomiting which is peculiar to arsenic poisoning. This information helped save the lives of the stricken guests.

The source of the poison in this case was traced to insecticide which had been stored on a shelf in the kitchen for several years. This calcium arsenate was a white powder easily mistaken for flour. The theory is that somebody accidentally emptied the sack of poison into the flour bin.

OTHER cases of similar accidents have turned out less fortunately. When rat poison was spilled in a sack of sugar in an Indiana store, some years ago, two of the many people made sick by the contaminated sweet died. In Los Angeles, in 1926, nineteen persons were made seriously ill from eating pies that contained arsenic, accidentally mixed with the ingredients.

"A package of poison on the pantry shelf," says Dr. P. B. Dunbar, assistant chief of the Food and Drug Administration, "is more dangerous than a loaded gun."

Simple rules, emphasized by Government experts, should guide the handling of poisons and poison-containing drugs in the home. Keep insecticides away from the pantry. Store them on a high shelf out of the reach of children. Keep medicines containing poisons on the upper shelves of the medicine cabinet. Get a prescription from a physician before taking drugs containing dangerous ingredients. If you take patent medicines purchased at a drug store be sure to follow the directions. Don't take larger doses than the directions indicate.

Singing Shave

© A. S. R. C., 1931

. . . when you slip an Ever-Ready Blade into your razor and your tough whiskers waltz lightly away. Of course you sing while you enjoy these face-pleasing, disposition-brightening shaves.

Be a Singing Shaver. Get genuine Ever-Ready Blades. They're guaranteed to improve your shaves.

American Safety Razor Corp., Brooklyn, N.Y.
Also makers of Ever-Ready Shaving Brushes

Ever-Ready BLADES

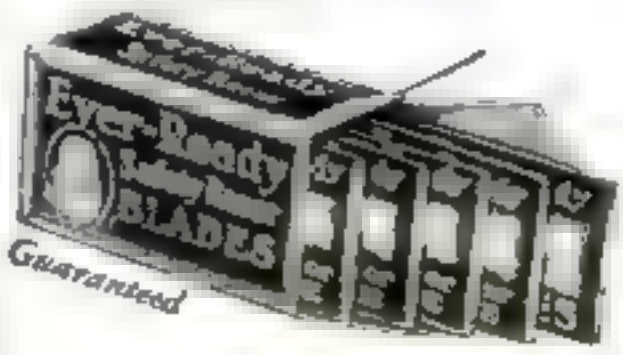

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 6.

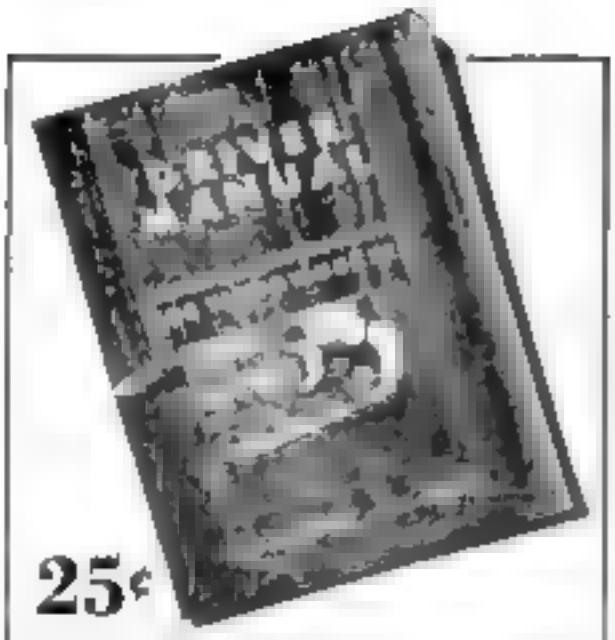

25¢

SHOWS how to install and operate an electric woodworking outfit—at a fraction of the cost ordinarily required.

48 pages of interesting information on how to set up a shop—use of tools—16 working drawings (all by W. W. Klenke) show what to make and how—choice of woods—clear and simple explanations for installation of motor, pulleys, shafting, etc. How to get the most from the lathe, jig saw, planer, belt and drum sanders, spindle shaper, drill press, flexible shaft and bench saw.

Reliable data on glueing, staining, filling, lacquering, wax and antique finishes.

24 joints shown and described.

Jig Saw Cut-Outs

THIS large, four-color book is devoted entirely to jig saw work. Full of ideas which greatly expand and increase the utility of this creative machine.

Most designs full size, ready for mounting and sawing out. Clever silhouettes for book ends, door stops, toys, weather vanes, lamp ornaments, etc. 18 inch model yacht drawn full size for cutting out by the unique "Driver" telescoping method. Every craftsman should have one.

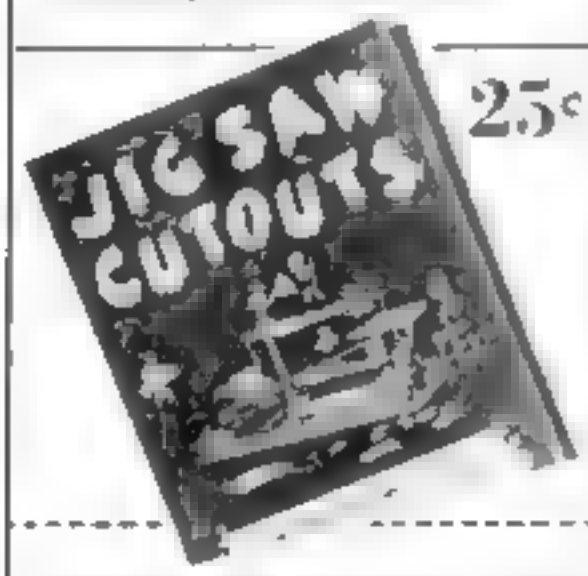

25¢

WALKER-TURNER CO., INC.
70 York St., Jersey City, N. J.
Dept. S

Please send me the following

☐ The Driver Manual 25¢
☐ Jig Saw Cut-outs 25¢

NAME

STREET

CITY STATE

WIRE MEN WORK RADIO MARVELS

(Continued from page 27)

business. Today, networks literally cover the country like monstrous spider webs. With two networks comprising seventy-six stations, the National Broadcasting Company, for its private use, leases from the American Telephone and Telegraph Company 18,000 miles of wire lines—enough wire to span the width of the continent five times!

The Columbia Broadcasting System, which also includes seventy-six stations in seventy-three cities, leases 13,500 miles. The N B C now is the world's largest telephone user. Its phone bill [illegible] was $[illegible]—more than $[illegible] a day! Columbia, too, spent more than $1,000,000 on telephone charges during the year.

BESIDES, the N B C. leases 10,000 miles of telegraph wires connecting the network stations with the master control room in New York, enabling engineers and operators to communicate with each other almost instantaneously. The Columbia System maintains a similar service. On the desk of Edwin K. Cohan, Columbia's technical director, there is a Morse instrument by means of which he can "talk" simultaneously to the system's seventy-six stations.

The reason for these giant wire set-ups and enormous phone bills becomes clear when it is realized what the big broadcasting companies are doing nowadays in the way of network broadcasting.

For example, last New Year's Eve between nine P. M. and two A. M. Station WABC, New York City key station of the Columbia Broadcasting System, in an international celebration of the air, made virtually the entire American continent into one gigantic studio. To add to the country's gayety, this one station, in those five hours, rebroadcast to the four corners of the United States musical programs and New Year's greetings picked up from these far flung points.

At 9:15, Minneapolis, Minn., 10:15, Buenos Aires, Argentina, 10:30, Boston, Mass., 11:45 Montreal, Canada, 12 o'clock Los Angeles, Cal., 1:30 Toronto, Canada, 1:15 Chicago, Ill., and 1:45 Toledo, Ohio. While at midnight travelers in New York heard the blare of a jazz band in Los Angeles, where then it was only eight o'clock, the Pacific Coast city through a nation-wide hook-up of the National Broadcasting Company heard the chimes of Trinity Church, New York, ring out the old year and ring in the new.

A sheet of the WABC master control log covering the New Year's Eve activities lies before me. From the chief control man's comments recorded there, it appears that each of these distant pick-ups was clear, came in on time, and went out on the dot. What made all this possible? Wire lines, highly improved and expertly engineered, is the answer.

ONE evening last May an office boy handed Cohan a newspaper telling that the Ohio State Penitentiary at Columbus was in flames. No sooner had he read the news than he got busy with his Morse key. A microphone was installed in the prison yard and within one hour the seventy-six stations of the Columbia System were broadcasting the actual sounds of the tragedy.

New Year's Eve, you may say, was a special occasion, probably involving unusual preparations, and the Ohio fire was an emergency. True. Similar efforts and results, however, now are part and parcel of an ordinary day's work in radio.

The big broadcasting companies have reduced their end of network broadcasting to a science until, nowadays, whole cities and even entire sections of the country are "plugged" in and out like local calls on a telephone switchboard. Naturally, the time element plays an all-important part, as it is vital that programs begin and end on the precise second scheduled. The stop watch is the badge of the broadcasting fraternity.

The technique is best illustrated with an actual example. Let us see what happens every Tuesday evening at 10:30 at Station WABC, New York. From 10:15 to 10:30 an orchestral feature is fed to a network of thirty-four stations. At 10:30, a variety entertainment is broadcast over a nation-wide network of sixty-two stations. Both programs originate in New York.

This is how the hook-up is widened to include the twenty-eight additional stations without creating what the broadcasters call "dead air"—that is to say, a silent period.

THE twenty-eight stations joining the network at 10:30 listen to the conclusion of the first program, which invariably ends with the customary tag line "This is the Columbia Broadcasting System." This phrase is the cue advising the twenty-eight stations that the following program begins in thirty seconds. In the intervening half-minute, they must wind up their own programs, make their local announcements, and join the network.

This each associated station does simply by connecting, through its control room equipment, the incoming program with its transmitter, a process essentially the same as plugging in an incoming telephone call. In the case of N.B.C., the cue, as you doubtless have observed, is "This program has come to you from the New York studios of the National Broadcasting Company." Incidentally, the N B C. allows an interval of only fifteen seconds to elapse between programs.

Now, suppose that a program is distributed only to a group of eastern stations, and the next feature, originating in southern California, is to be fed to a nation-wide network. In such an event, you may hear the New York announcer say, at the close of the first program, "We will now take you to Los Angeles, where the next voice you will hear will be that of Graham MacNamee speaking from the Rose Bowl."

That is the prearranged cue for the eastern stations in the preceding network which also will take the California program. But the first program was not broadcast to California, and thus MacNamee does not hear the cue. He, therefore, is given the "go-ahead" signal, and a telegraph signal also is flashed to the stations so located as to be unable to listen in on the preceding feature.

This smoothly working system, together with the fact that the broadcasting companies use private wires, explains why a network program originating hundreds, or even thousands, of miles away, comes from your loudspeaker on scheduled time, while you may have to wait twenty minutes to get a long-distance telephone call through to the next town.

BUT it does not explain why network broadcasts are virtually free from the hum, extraneous noises, and distortion that mar a long-distance and sometimes even a local telephone conversation. For example, the voice of an opera singer sent by telephone wire from Chicago to New York and San Francisco sounds as clear as a bell. If the same artist, however, sang to you on the telephone, even over a short distance, the effect would be far from enjoyable.

The reason is that no stone is left unturned to (Continued on page 138)

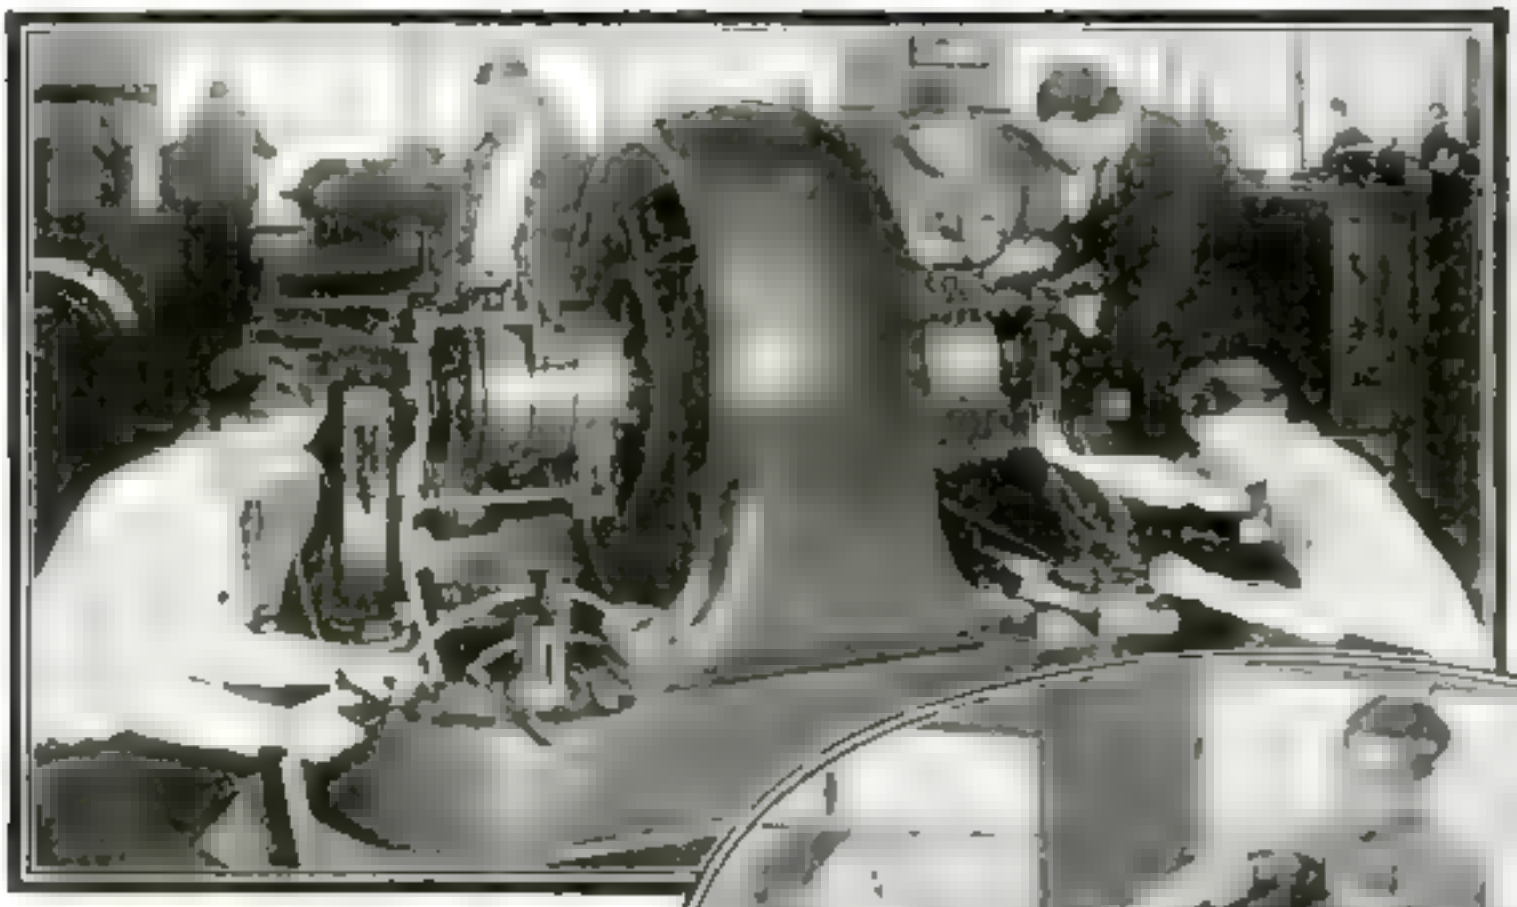

Coyne students getting actual experience on one of my big synchronous converters!

One of my Instructors explaining the operation of a radial airplane engine

A BIG PAY JOB for YOU in ELECTRICITY

Don't spend your life in a dull, hopeless job! Don't be satisfied with a mere $40.00 or $50.00 a week! You don't have to! Electricity pays salaries of $60.00, $70.00 and even $200.00 a week to thousands of fellows no smarter than you.

Learn Without Lessons in 90 Days
In the Great Shops of Coyne

Come to Coyne at Chicago and learn Electricity in 90 days—**not by correspondence, but by actual electrical work**—on huge motors and generators, switchboards, power plants, substations, auto and airplane engines, armatures, etc. You don't need advanced education or previous experience. Coyne has been placing men in Big Pay Electrical Jobs since 1899. **Let Coyne help you to a good electrical position.**

Free Employment Service
Earn As You Learn

Don't worry about a job! My Employment Department gives you a FREE lifetime service. And if you need part-time work while at school to help pay expenses, we'll gladly help you get it. MAIL COUPON FOR FREE PROOF THAT YOU CAN HAVE A GOOD ELECTRICAL JOB IN 90 DAYS! Get my Big Free Electrical Book—FREE Radio and Auto Electrical offers. Find out about my special low tuition price. **This does not obligate you in any way. JUST MAIL THE COUPON!**

COYNE ELECTRICAL SCHOOL
H. C. LEWIS, President — Founded 1899
500 S. Paulina St., Dept. 41-73, Chicago, Illinois

JOBS PAYING $60 to $200 a week

Power Plant Operator	$60 to $70 a wk.
Maintenance Engineer	60 to 100 a wk.
Armature Winding . .	45 to 75 a wk.
Illumination Expert .	50 to 80 a wk.
Radio Service Expert	60 to 100 a wk.
Aviation Ignition . .	60 to 125 a wk.
Battery Expert . . .	70 to 200 a wk.
Auto Electrician . . .	75 to 200 a wk.
Contractor Dealer . .	60 to 300 a wk.
Signal Engineering .	50 to 100 a wk.

FREE ELECTRICAL BOOK Coupon

H. C. LEWIS, President
COYNE ELECTRICAL SCHOOL, Dept. 41-73
500 South Paulina Street, Chicago, Illinois

Gentlemen: Please send me your big Free Electrical Book with 151 Illustrations. This does not obligate me.

Name.....

Address.....

City..... *State*.....

. . Get the

RADIO

TRAINING

you need at home in your spare time

IN order to help you learn radio in the shortest possible time, RCA Institutes, Inc., was established. You may study radio at home in your spare time . . . or at any one of the Institute's resident schools throughout the country.

It is not hard to study radio the way it's taught by RCA Institutes. You learn radio by actual experience on the latest type of radio equipment. And you need not give up the position you now hold. You can study an hour a day or any number of hours a day at home in your spare time.

The RCA Institutes Home Laboratory Training Course teaches you in a most thorough manner. You learn about servicing and selling, operating radio telephony and telegraphy...also instruction in sound motion picture installation, maintenance and repairs. And you receive at no additional cost the complete RCA Institutes' home laboratory equipment, a modern outlay of apparatus furnished to every student, enabling you to easily solve radio problems.

Home Training Course by America's Finest and Foremost Radio Training Organization

This home training course and free laboratory equipment are backed by more than twenty years' experience.

Send for our FREE BOOK Today!

Everything you want to know about radio described in detail the home training that has placed thousands of men in good paying positions.

RCA Institutes, Inc.

RCA INSTITUTES, Inc.
Dept. SP-4
75 Varick St., New York, N. Y.

Gentlemen: Please send me your FREE book which tells about your many opportunities in Radio and about your famous laboratory method of radio instruction at home.

Name.....

Address.....

.....

Occupation.....

WIRE MEN WORK RADIO MARVELS

(Continued from page 110)

improve the quality of telephone transmission of radio programs. Transcontinental broadcast programs cross the continent over one of three major wire circuits—luxurious boulevards of broadcasting, rigidly policed and patrolled by expert transmission men. There is the northern route, through Montana and Minnesota, a central circuit, crossing the Middle West via Denver and Omaha or Kansas City; and the southern route, swinging across the Texas Panhandle north into Chicago.

At intervals of fifty miles on the cable circuits, and of 150 miles on open wires, are repeater stations, where amplifiers make up for losses en route. The location of these repeater stations is fixed by mathematical formulas. Wherever engineers determine that the tiny voice currents must be boosted by relays, there a repeater station must be located.

IN THESE repeater stations the transmission men, patrolmen of the electric highway, listen carefully to every sound coming over the wires. They are linked by telegraph, for each is an expert Morse operator as well as a thorough telephone technician. A crackle or a thump in an operator's loudspeaker brings an inquiring chatter of telegraph sounders along the line. An instant's Morse-code conference determines the source of the noise. Operators make hasty repair or switch a new link into service, but the program goes on without interruption.

At terminal points, where both incoming and outgoing programs may be passing over the wires, each program is monitored—that is, checked and regulated by a separate transmission man, whose sole duty is to listen to outside noises. Stationed in a soundproof booth with loudspeaker and log book, he notes every extraneous sound, no matter how minute. His record, couched in professional jargon including such terms as "chirps," "ruts," "cross-talk," "hits and misses," "pops, thumps, and scratches," [illegible] "Morse thumps" and "dots," forms a basis for checking against wire trouble of all kinds.

Although broadcast programs use the wires only a part of the time, maintenance men are busy twenty-four hours a day measuring, testing, and balancing the circuits. The "length" of the line, in electrical miles, varies from hour to hour with fluctuations in temperature and humidity. A sudden cold snap causes a marked change in the resistance of the wire, throwing circuits out of balance. Rain or heavy fogs alter the electrical capacity of the circuit, introducing distortion.

THROUGH tests made with an oscillator producing musical tones of known frequencies, transmission men compensate for these changes and keep a high standard of distortion-free transmission. Their goal is perfect fidelity of tone over a range from 100 to 5,000 cycles. A frequency band of but from 250 to 2,500 cycles per second is sufficient to transmit intelligible speech in an ordinary telephone conversation. There, in a nutshell, is the reason for the difference in quality.

Of the entire network, by far the most vulnerable part is the thousands of miles of open-wire circuits, fully exposed to the mercy of the elements. To see that these channels are kept open at all times is a real job for the transmission men, aided though they are by the finest instruments.

When a flaw develops in the line, a transmission man steps to a cabinet and plugs a delicate instrument into the circuit. Looking down into the luminous ground-glass screen of a reflecting galvanometer, he adjusts a series of resistances until the needle stands at zero. This indicates that the artificial "line" forming part of the instrument itself equals in electric length the distance out to the fault. Reading from his dials, he can calculate exactly the location of the trouble, which may be anywhere from 100 yards to 100 miles away. A line crew then is dispatched to make repairs.

Curious situations often confront these linemen. They find that snakes have been thrown up into the wires, or that a wild duck has become entangled in the lines. An unusual case of "bird trouble" happened out in Kansas, where a transmission man noted a peculiar "swinging" effect every evening, just at twilight. Electrical measurements indicated that it originated near Osawatomie, Kansas.

A man was sent out to investigate, found nothing unusual, but the disturbance was repeated so regularly that a lineman was stationed near this spot to watch for several days. At last he noticed that every night at sundown a huge flock of blackbirds came by and settled upon the wires. Checking with the transmission operator, he found that the weight of the birds stretched the wires and altered the electrical capacity of the circuit.

Another time, a transmission man observed a grating, irregular sound occurring at intervals during both day and night. Linemen found no evidence of trouble, so a man was stationed night and day to watch along the suspected section. In the middle of the afternoon, the transmission operator called him on the wire. "What's all the racket out there?" he demanded. "We're getting a lot of noise."

"You'll have to speak a little louder," said the lineman. "There's a train going by."

"Maybe it's the train making the trouble," suggested the transmission operator.

"Don't try to be funny," retorted the lineman. As he spoke, he happened to glance down the line, which ran close to the tracks of the Missouri Pacific Railroad. The engine was puffing out heavy clouds of thick black smoke. At a point where the telephone line was a good deal higher than the train, the smoke was pouring across the open wires. Investigation showed that the tiny particles of carbon in the smoke formed a path for current, creating a partial short circuit in the line.

OTHER frequent sources of trouble are airplanes crashing into the lines, boys' kites getting caught in them, street excavators cutting into cables, loads of hay brushing the wires down, and automobiles wrecking themselves against poles. The lead-sheathed cables are a favorite target for hunters, and the first rain is often followed by many cases of trouble where water has entered the cable through a bullet hole. Difficulty has been reported in some places because of the depredations of a small worm that bores its way into the cables.

Just before the rainy season, the whole system of aerial cable is gone over literally with a magnifying glass, to check against punctures in the lead sheath. This, of course, is impossible with the buried subterranean cable. Recent research, however, has developed a new type of cable filled with gas under high pressure. If a hole appears in the cable, the drop in pressure due to the escape of gas sounds a warning gong. Gage buzzers along the line at intervals allow the cable men to discover what section is affected. The hole is then located by wetting the cable with a soap solution, which bubbles where the gas is escaping.

HARD WORK MADE ME A FLYER AT SIXTEEN

(Continued from page 31)

are hired. The safest flying in the world is a pleasure hop around an airport in a regular passenger-carrying plane operated by an expert pilot.

The following year, a "plane checker" was needed at the field and I got the job, working after school hours. At every large airport there is someone who takes down the numbers of all arriving planes and has the pilots sign registration slips. When a ship taxies up to the line, I hop on my bike and go out to "check it in."

THIS work was a lucky break for me. I met famous pilots from all over the country: Frank Hawks, Art Goebel, Roger Q. Williams, Clarence Chamberlin, and others. I kept my ears open and learned much from hearing such men discuss their experiences.

A job around an aviation field is a good start toward learning to fly. Anyone who is saving up for a flying course can get a free head-start by listening to pilots and mechanics talk of flying problems and watching the mistakes of beginners.

Besides checking in planes, I gave information and ran errands. On the side, I "gassed" planes, greased engine rocker arms, and did a hundred and one tasks that would give me experience. When the pilots learned they could depend on me, they gave me lots of odd jobs to do and paid me in rides. Randy Enslow used to let me take care of his dog, "Patsy," while he was flying.

It was Randy who gave me one of my most exciting rides. We "bombed a fort" at eleven o'clock at night as part of a big air show last Fourth of July. With the floodlights on, we took off in an open-cockpit Standard biplane. Randy was the pilot and I was the "gunner." I had a Very pistol that shot out a brilliant ball of fire every time I pulled the trigger.

In the middle of the field was a thirty-foot-square stockade, with two mechanics stationed inside to "defend the fort" by shooting off rockets and fireworks every time we approached. Randy would dive on the fort, I would shoot the Very pistol, and the mechanics would set off their fireworks. Sometimes we roared through a shower of sparks only fifteen feet above the fort.

At the end of every dive, Randy would pull up in a steep climbing turn to 200 feet and dive again. That corkscrew zoom almost drove me through the seat. I had to throw overboard the empty cartridge, get a good one out of a bag under my safety belt, and load the pistol before we were over the fort again. It was dive, zoom, turn, dive, and zoom again so fast it made me dizzy.

I HAD a hard time getting the pistol loaded quickly enough, but I missed only one shot. Several of the fiery balls landed squarely in the fort and I could see them strike and roll along the ground with the mechanics hopping around to keep out of the way. Every time I fired the pistol, the mechanics would knock a board or two from the stockade so when I had used all the cartridges, the whole fort was "destroyed" and the "bombing" successful.

Another time I went up with Randy at night, we took along "Buddy" Bushmeyer, the famous parachute jumper. He floated down waving a Roman candle around his head while we spiraled about him with our landing lights on.

Some of the pilots began letting me hold the stick a little in the air and they told me what to watch in making different maneuvers in flying. Several times they let me ride in (Continued on page 140)

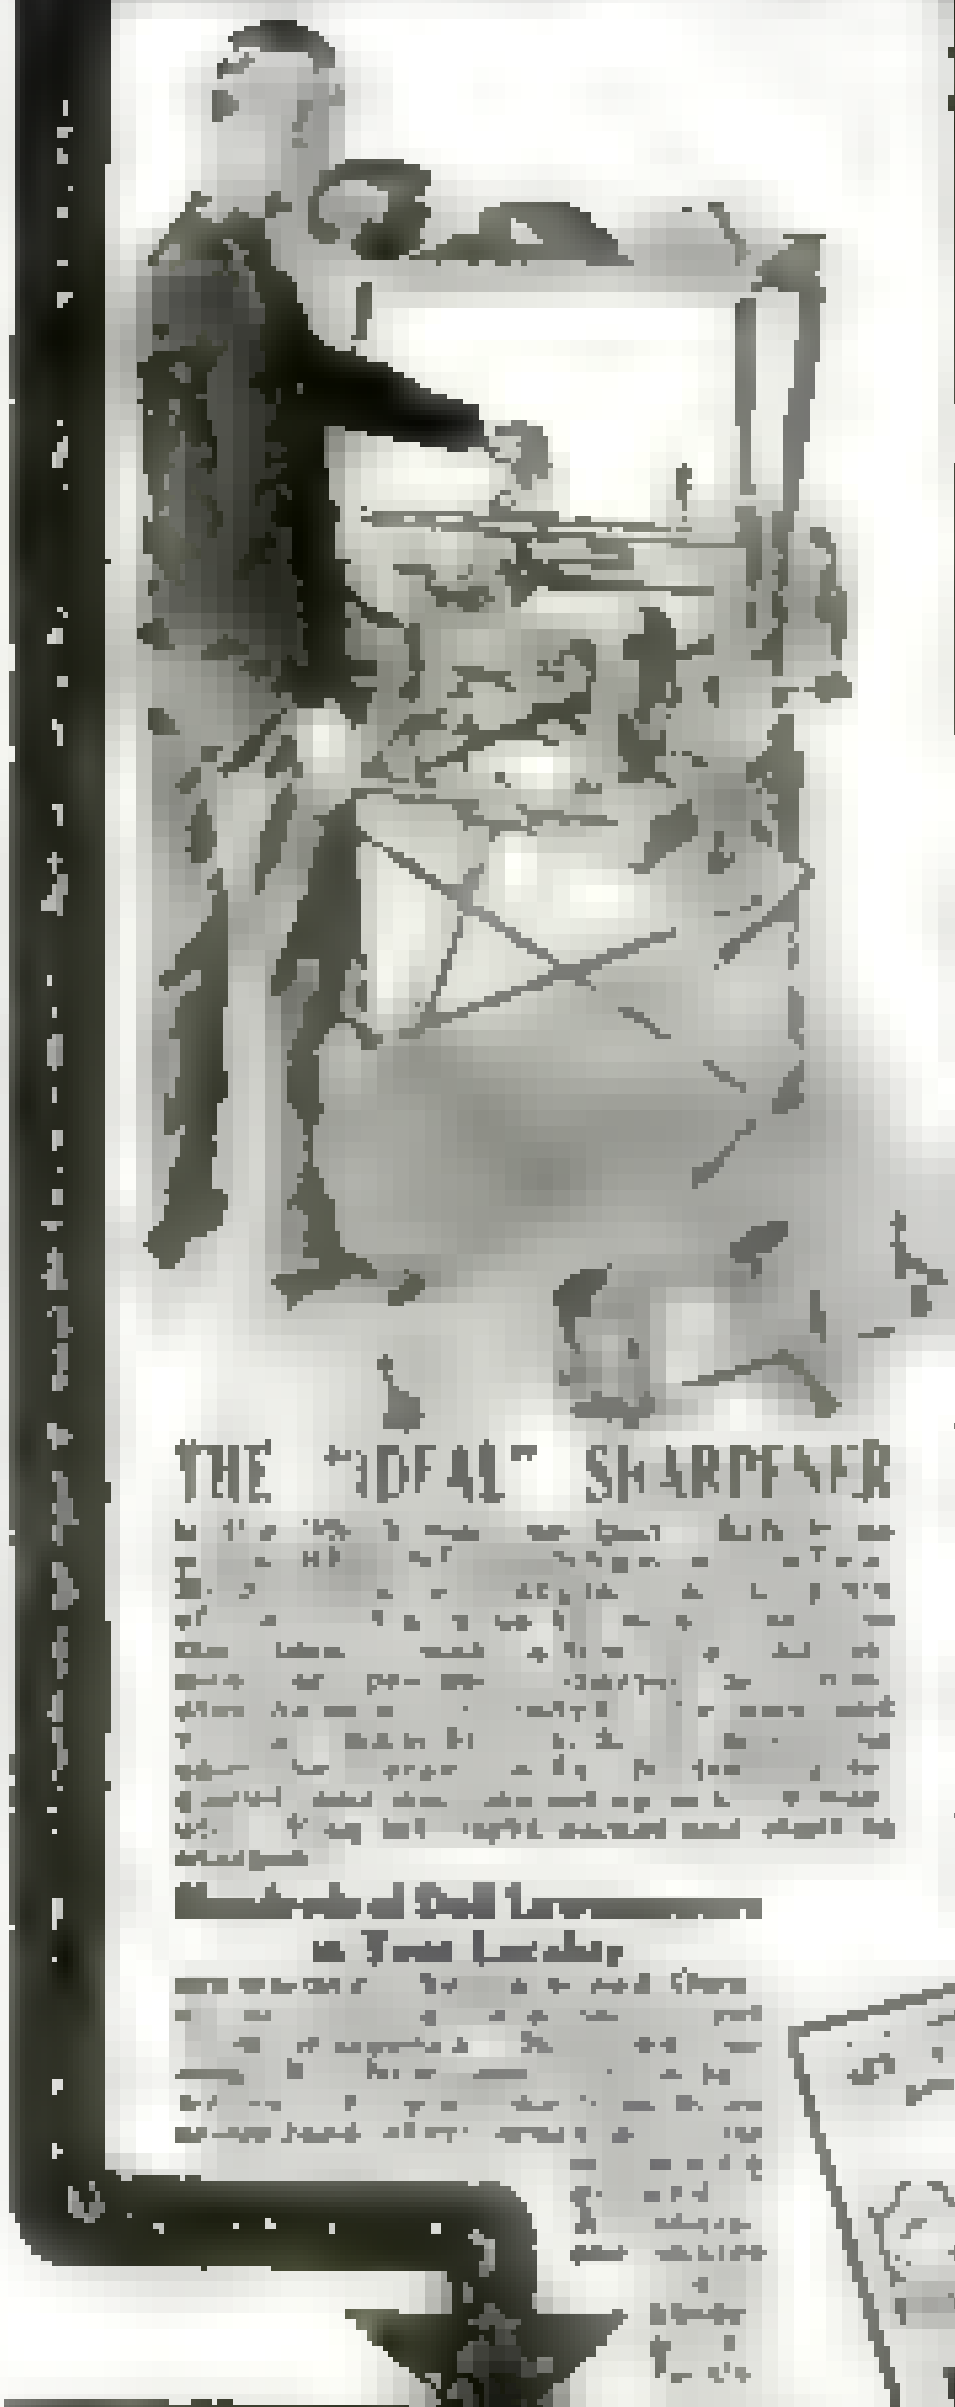

YOU can make $4.00 to $6.00 an hour with the IDEAL LAWNMOWER SHARPENER

Others Are Doing It—So Can You

FREE book tells how others do it!

SIGN AND MAIL TODAY

THE FATE-ROOT-HEATH CO.
Plymouth, Ohio, U. S. A.

COLLEGE COURSES AT HOME



University of Chicago
CHICAGO, ILL.

SONG WRITERS

Advance Royalty Payments, New Talking Picture Song requirements, etc., fully explained in our Free instructive book. Writers of Words or Music for songs may submit their work for free examination and advice. We revise, compose, arrange music and secure Copyrights. Our modern method guarantees approval. Write Today—
New York, N. Y.

AGENTS 500% PROFIT
GENUINE GOLD LEAF LETTERS

Guaranteed to never tarnish. Anyone can put them on stores or office windows. Enormous demand, large profits. Paul Clark says smallest day $28.70. R. L. Reel made $920 in two months. Write today for free sample and liberal offer to general agents.
METALLIC LETTER CO.

DATA CHART—FREE

BE A Traffic Manager

Big business needs trained traffic men and pays them well. Train in your spare time for this highly profitable, growing profession. Low cost, easy terms. Write now for valuable 64-page book—FREE.
LaSalle Extension University, Dept. 483-T, Chicago

Learn Cartooning
At Home—In Your Spare Time

THE LANDON SCHOOL
Cleveland, O.

Want a Steady Job?
Work for "Uncle Sam"
RAILWAY POSTAL CLERKS
MAIL CARRIERS
$1700 to $3000 Year
MEN—BOYS, 17 to 50 SHOULD MAIL COUPON IMMEDIATELY
Steady Work. No Layoffs. Paid Vacations.



COUPON
FRANKLIN INSTITUTE
Rochester, N. Y.
Name
Address

Full Railroad Fare from Your Home to Los Angeles deducted from cost of training if you enroll now!

MEN WANTED—
Train in California for Good Jobs!

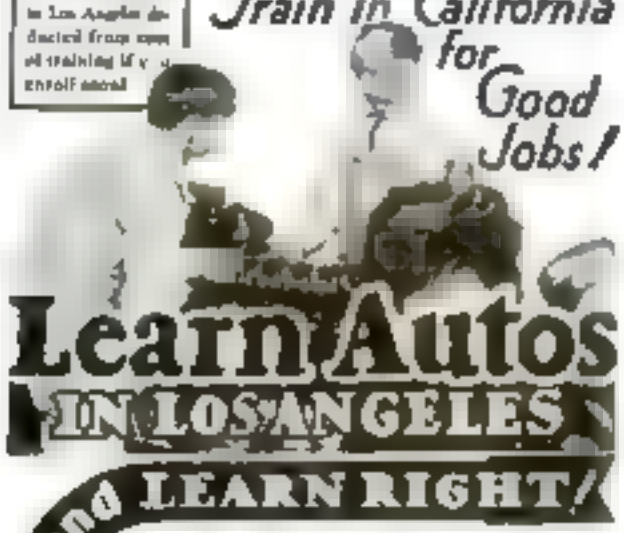

Learn Autos IN LOS ANGELES and LEARN RIGHT!

FULL RAILROAD FARE ALLOWED TO LOS ANGELES!

It's only human for you to want to come to California, Everyone does. How much better to come and get started right—quickly qualifying for the *best pay jobs*. We are allowing full railroad fare from any point in the United States for a limited time only, to encourage more men to take advantage of California Training. Never again will you get an opportunity like this. Come West NOW!

A Few Short Weeks at National and You're Ready for a Big Pay Job!

For 26 years National has quickly helped men get ready for big pay, steady positions in the profitable Automobile fields. Don't worry about previous experience, or whether you're too old or too young. We train you by "Actual Shop" Methods on thousands of dollars worth of right-up-to-the-minute equipment. Not a Correspondence School. Start any time.

...And Don't Worry About Money! We'll Help You!

Even if you're short on cash you can get National Training. We help you secure good part-time jobs to earn living expenses while learning. Unlimited Employment Service assures you real, friendly co-operation in getting started on the road to real money, steady work and a prosperous future. Employers keep us busy sending them men—they know National Auto Men are best, so they don't waste their time on half-baked, untrained mechanics. 25,000 graduates since 1905.

National's Doors Are Open to You! Investigate at Once!

Write now—today—for the whole story. Our big free book with full details sent FREE. Don't lose another minute. These offers are necessarily limited for a short time. Mail the coupon and soon you can be on the train for Los Angeles!

WRITE for FREE BOOK NOW

National Automotive School



HARD WORK MADE ME A FLYER AT SIXTEEN

Continued from page 139

dual-control ships and fly them myself for short stretches. Dick Pears, "Chan" Chandler and R. J. "Barney" Barban, another Roosevelt pilot, gave me the most pointers.

Once I was doing cross-country with Barban when he made a sharp turn in a vertical bank. When the nose dropped a little, he pulled it up quickly. I asked him why. He explained that the nose of the plane must be kept on the horizon or slightly above it in a vertical bank. If it drops below the horizon, the ship will roll over on its back. Bits of valuable information like this I jotted down. They helped me avoid trouble and saved time later on when I learned to fly.

THE nearest I ever came to being in a crash happened in June 1929. I was up with a pilot in a little sport plane in which we sat side by side in the cockpit. He went into a fast loop at 4,000 feet. At the top, he didn't get the throttle closed quickly enough. We came out in a long vertical arc with the power on. As we leveled off, the centrifugal force drove us downward so hard three welded seat fittings let go. We crashed to the floor of the cockpit, the seat pinning the control cables so they couldn't be moved.

As soon as I could, I crawled to my knees and held the seat up off the cables while the pilot made a landing. It all happened so suddenly I didn't have time to be scared. But after I got on the ground and began thinking what might have happened because we were no parachutes, my hair stood on end. I resolved never to be caught in a plane stunting without a chute again.

The only time my flying ever interfered with my school work was in 1929 when I missed three days by flying to Washington to see Hoover inaugurated. Martin Jensen had a contract to fly pictures back to New York by plane. He said I could fly down with him in his famous Breese monoplane, the *Alaska*. That was the farthest I had ever been away from home. I stood in the rain in the street and watched the ceremonies and then went back to Hoover Field and found all the planes mired down in the mud, unable to take off. It was three days before the weather cleared and I could fly home. My grandmother was in Washington and I stayed with her so the whole trip cost me only $1.50.

But even that seemed quite a bit because I was piling up every nickel I could get for the "flying fund." By the spring of 1930, when I was sixteen, I had enough to start in the school at Roosevelt Field. I took my instruction at seven o'clock in the evening so I could continue my regular work at the field. As I already knew how to keep a straight course and make turns, "Husky" Fiselier, my 190-pound instructor, who weighed almost twice as much as I did, let me practice landings the first day. Ordinarily it is a week or so before a student begins this part of his training.

THREE and a half hours after I began instruction, I made a solo flight. The lessons I learned while flying as passenger cut my instruction time in half. My greatest difficulty was learning to steer a straight course on the take-off. I had been used to handling the rudder in the air where the slightest pressure brings results. On the ground, the slower-moving ship had to be given almost full rudder to turn it.

After I had groundlooped, or run around in circles on the ground, half a dozen times, I got the knack of keeping the ship taxiing straight and the *Continued on page 141*

Here's That Long-Hoped-for

"HOME WORKSHOP MANUAL"

at a new low price!

Order NOW—send NO MONEY—and get this BIG WORKSHOP MANUAL for $1.05 less than the regular price.

With the expert help of this great handbook you can easily be your own furniture builder—electrician—radio expert—painter—decorator—toy maker—model mechanic—garden craftsman—metal worker—boat builder—and general all around construction and repair man.

Contains 488 pages and more than 800 illustrations

16 COMPLETE SECTIONS

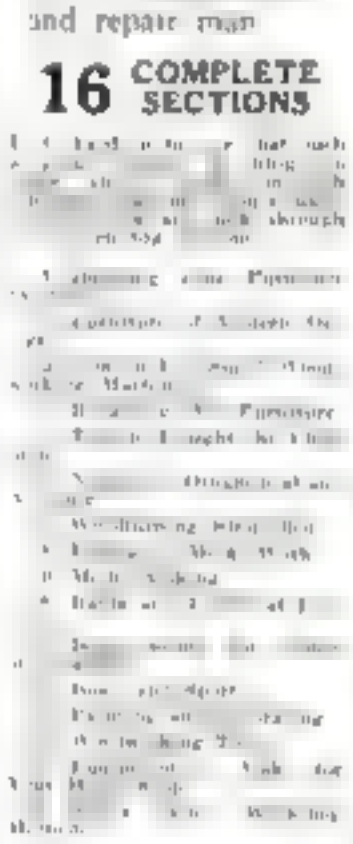

REGULAR PRICE $5.00—NOW ONLY $3.95

With Your Name In Gold On The Front Cover

SEND NO MONEY—Just This Coupon

Write your name before you turn this page. Don't miss this temporary bargain. You need send no money with the coupon. We will mail the book to you at $3.95 C. O. D., plus a few cents postage. Your name will be in *all gold* on the front cover. If you don't find this the most interesting, useful, time and money saving guide you ever saw, send it back and your money will be refunded.

ORDER ON THIS COUPON

Popular Science Publishing Co.,
381 Fourth Avenue, New York, N. Y.

Please send me a copy of the regular $5 edition of The Home Workshop Manual for only $3.95. If I am not entirely satisfied I may return it and you will refund my money.

Name

Address

City State

HARD WORK MADE ME A FLYER AT SIXTEEN

(Continued from page 140)

rest was comparatively easy. At the end of ten hours solo, I passed the tests and won a private pilot's license

Roosevelt Field is the eastern distributor for a light plane, a tiny, thirty-horsepower machine, nicknamed by pilots "The Baby-Bathtub." I asked permission to use one in an attempt to set a light plane altitude record and consent was given. To make the record official, I took out an F. A. I license, the certificate required by the international governing body of aviation. I also hold a sporting license. This makes three I have been awarded.

A FIFTEEN-MILE wind was blowing out of the north when I took off for the long climb. The little tanks of the plane were crammed with eight gallons of fuel. I used five on the flight. The start was made at 3.30 P.M. on a perfect late summer day. Above 3,000 feet, the air was smooth as glass. Compared to the roar of a Whirlwind or Wasp motor, the sound of the little engine was the hum of a bumblebee. I circled over the north shore, above Oyster Bay, so if the wind freshened I would not be carried out to sea.

As I climbed, the houses and fields shrank in size. The huge concrete hangars at the field, each holding half a dozen planes, looked no bigger than the heads of pencils. I could see the tiny skyscrapers of New York to the west; the brown Connecticut hills across the sound to the north, Peconic Bay and the two forks at the tip of Long Island to the east, and, far out on the Atlantic to the south, two steamers the size of ants, heading for Europe.

At the end of an hour and a half I reached the peak of my climb. The temperature had fallen to nine degrees above zero. But I wore a fleece-lined suit and didn't notice the cold. The altimeter pointed to more than 11,000 feet, but I had no difficulty in breathing. The only thing that bothered me was the fact that the plane would "mush down" through the thin air, or settle, every time I pulled the stick back and tried to climb. The unprotected carburetor was affected by the cold and the engine had lost much of its power.

For fifteen minutes, I tried unsuccessfully to gain a few additional feet. Then I closed the throttle and started the glide back to earth. Every few minutes during the descent I would "run the motor" clearing it out with a brief burst of speed so it would not clog up and stop on the way down.

THE descent took half an hour and lights were springing up all over Long Island in the dusk when I sat down and taxied up to the starting line. After the Bureau of Standards had calibrated the barograph I carried, I was awarded the official American record for planes of this weight at 10,525 feet. The highest I had ever been before was about six thousand feet as passenger.

I am still checking in ships at the field and learning things every day. Whenever I can save up enough to hire a plane, or when one of the private owners at the field will lend me one, I pile up flying hours toward a higher license. By the time I am eighteen, I hope to have most of the 200 hours necessary for a transport license. So far, I have flown eight different types of planes, the largest a Waco biplane with a 165-horsepower Wright engine. Some day, I hope to have a chance to handle a "big boy," as pilots call a multi-motored ship. My plan is to put on some more weight, get a transport license, and then pilot the big boys!

LOOK—Miss Nobody thinks she can play' someone whispered

—but when she sat down at the piano . . .

It was [illegible] And do you know it only [illegible]

I Taught Myself

LEARN TO PLAY BY NOTE

Mandolin	Saxophone
Piano	'Cello
Organ	Ukulele
Violin	Cornet
Banjo	Trombone

Or Any Other Instrument

U. S. SCHOOL OF MUSIC
Brunswick Bldg., New York City.

Name

Address

Instrument

I pick [illegible] this one?

Be a DENTICIAN

LEARN AT HOME

A Career in Aviation

INTERNATIONAL CORRESPONDENCE SCHOOLS
Box 7696 F Scranton, Penna.

☐ AVIATION ENGINES ☐ OCEAN NAVIGATION
☐ DEAD RECKONING

Name

Street Address

City State

PROFITABLE WORK FOR YOU!

INSTITUTE OF CALIFORNIA, Box 2575

A definite program for getting ahead financially will be found on page four of this issue.

MEN! Cash in *on New Food Idea that Brings Profits up to* $1,000 a Month

$3000 in 3 Months

"I made $3000 in 3 months by following my Brown Bobby business. I Ohio. Mandy, Pa.

$45 a Day

In 3 weeks have built up a Brown Bobby business that pays profits of $45 a day." M. J. Lavoie, Ill.

Don't wait another day to investigate Brown Bobby the world's first Caramel Doughnut. This new food sensation is bringing "fortunes" to ambitious men in every locality. Many clearing up to $5 a week in spare time. Easy to follow plan makes it possible for full time. No baking or selling experience needed. Start anywhere—basement, kitchen, store wherever there is an electric light socket and 2 square feet of space.

SEND FOR FREE BOOK that explains everything. No red tape. No delay. We supply all necessary equipment and show you just what to do to start profits rolling in the very first day. Don't wait and let someone else cash in ahead of you. Send name and address on postcard today for these amazing new money-making facts.

FOOD DISPLAY MACHINE CORP., Dept. 1305, 500 N. Dearborn St., Chicago, Ill.

ARTISTS EARN MORE

WHY not train your ability along art lines if you like to draw? Art is a vital part of today's business. Advertisers and publishers are paying large sums of money annually to those who are trained in Modern Art. Successful magazine and newspaper artists are making fine incomes today. A great many successful students of the Federal School of Illustrating now earn from $2500 to $6000 a year—some even more.

Drawing is a fascinating study as taught through the Federal Home Study Course in Illustrating. You can learn while you earn if you wish. More than fifty famous artists have contributed exclusive lessons and drawings to the Federal Course.

Their experience helps you to become a professional. In your spare time at home you may receive thorough instruction in all branches of Illustrating, Cartooning, Lettering, Poster Designing, and Window Card Illustrating.

Why not train your talent for drawing? If you like to draw, it may be your opportunity for success in life.

TEST YOUR TALENT—FREE

Clip and sign the coupon below and get Free Vocational Art Test and the book "A Road to Bigger Things" without charge. Our instructors will go over this art test and give you their frank opinions as to your ability. With art training you may become a nationally known artist with a large income later on. Make your start today by sending the coupon at once.

FEDERAL SCHOOL OF ILLUSTRATING
4141 Federal Schools Building
Minneapolis, Minnesota

Federal School of Illustrating
4141 Federal Schools Bldg.,
Minneapolis, Minnesota.
Please send me free book "A Road To Bigger Things" and Standard Art Test.

Name _____
Age _____ Occupation _____
Address _____

RICHES IN MYSTERIOUS OCEAN SHELLS

(Continued from page 57)

develop to their greatest size, the motorboat is anchored about 200 yards from the breakers that pound the rocky points, and the divers, in pairs, step into the long boats, which, rowed to within fifty feet of the tumbling white water, are anchored with bow and stern hooks. Both divers don their suits, though only one goes down at a time, the other remaining ready to go instantly to the aid of the other in case of accident

IN HIS preparations, the diver first steps into combined trousers and shirt, made of rubber and weighing eighty pounds. Then he puts on lead-soled shoes weighing twenty pounds each and buckles on a belt carrying fifteen ten-pound blocks of lead, hooked to the belt like cartridge clips on a bandolier, so that they may be dropped off easily in case the diver wishes to get quickly to the surface. Finally, the diver's assistant covers the undersea fisherman's head with a seventy-pound helmet, all metal except for a thick glass frontpiece

Thus, in addition to his own 150 pounds or more, the diver carries 340 pounds of additional weight, yet frequently even this is not enough to keep him from being battered against boulders and ledges when the currents run heavily on the bottom of the Pacific. After the diver is dressed, the air hose is tested, and the rope running with it hooked into the shoulder plate of the diving suit, so that no strain may come on the rubber tube at the point where it enters the helmet. Sometimes the air pump is operated by a small gasoline engine and sometimes by [illegible]

A heavy iron ladder leads down into the rough water from a two-inch pipe, clamped across the gunwales, well forward. Onto this the diver steps, walking slowly down until only his head, arms, and shoulders remain above the surface. An attendant hands him a basket made of heavy netting woven to an iron ring about eighteen inches in diameter and a flat steel bar two to three feet long, with a chisel tip at one end and a sharp point at the other. This bar, an inch to an inch and a half wide by a quarter of an inch thick, is the diver's fishing rod, pick, crowbar, and weapon, all in one. It is looped to his wrist by a leather thong, while the basket carries a light, strong line, the end of which is held by one of the men remaining in the boat. Hung from his belt, at the middle of his back, the diver carries in a brass scabbard a heavy, two-edged knife, with blade fourteen inches long. This is also a weapon and a tool for cutting away the kelp trunks and branches in which he may become entangled.

WHEN all is ready, a man stations himself at the air pump, where he maintains constant pressure of sixty pounds through a reserve tank so that, even if the pump breaks down, there still will be enough air available to maintain the diver's life until he can be hauled to the surface. Another man takes the life line, by which the diver communicates with the men in the boat, a third cares for the basket line; and a fourth, armed with a fifteen to twenty foot pole, headed with a two-foot, razor-sharp, steel blade, stands by to cut kelp

As the diver disappears, a line of bubbles, dimly discernible in the foam of the swirling sea, marks his course. Abalones usually are found in colonies. If the diver does not get the flat end of his bar under the shell before the mollusk clamps down on the rock or kelp root, he leaves it. Shells of the abalones must not be

(Continued on page 143)

Send No Money
GUARANTEED
UNDERWOOD

Sent on Trial
New Low Prices
Standard 4 Row Keyboard

Save 1/2 Mfgs. Orig. Price

New Big Catalog FREE

EASY TERMS after 10 Day Trial

Learn Typewriting FREE!
Send for Catalog FREE!

INTERNATIONAL TYPEWRITER EXCHANGE

Have Fun Making Money

Yes, You Can—Anybody Can make a lot of money right at home and, what's more, have real fun doing it. We show you how, we furnish everything necessary on an easy basis

Costs Nothing to learn about our plan and details are given in our Free Booklet. Write today. A postal will do. Hundreds of men and women have made big money and become independent. Learn how easy it is to make from $10 to $25 per week in the most delightful home work you can imagine

Don't miss this opportunity!
Write Now. It's FREE.

FIRESIDE INDUSTRIES, Dept. 51-D, Adrian, Mich.

BE A PHOTOGRAPHER

SPLENDID SALARIES PAID TRAINED MEN AND WOMEN

NEW YORK INSTITUTE OF PHOTOGRAPHY
Dept. AD-3417 4 West 33rd St. New York City

MAGIC BOOK SENT FREE!

AMAZE and MYSTIFY YOUR FRIENDS!

Be Popular—Learn to Entertain!

LYLE DOUGLAS, Station A-13, Dallas, Texas.

LEARN AT HOME TO BE A
RADIO EXPERT

Radio's amazing growth is opening hundreds of $30, $60, $75 and $100 a week jobs every year

Get one of these fine jobs for yourself. Broadcasting Stations, Commercial Land Stations, Manufacturers, Dealers, Jobbers, Ships, Aviation, Talking Movies are continually needing well trained Radio men. I'll train you at home in your spare time to be a Radio Expert. My enlarged and improved course with 6 outfits of Radio parts for a Home Experimental Laboratory makes learning at home easy, fascinating.

Make extra money while learning

There is need in every neighborhood for men who really know how to make connection in and repair sets. I'll show you how to do the jobs and how to get them. Many N. R. I. men make $200 to $1,000 in their spare time while learning. Write for "Rich Rewards in Radio." It tells you about Radio's spare time and full time opportunities, my course and Life Memberment Service. You won't obligate yourself. So it Now!

J. E. SMITH, President, Dept. 1-D P3
Nat'l Radio Institute, Washington, D. C.

64-PAGE BOOK OF FACTS FREE

MAIL THIS COUPON TODAY

J. E. Smith, Pres.,
National Radio Institute, Dept. 1 D P3
Washington, D. C.

Dear Mr. Smith: Send me your free book. I understand this request does not obligate me and that no agent will call.

Name .....
Address .....
City ..... State .....

Don't Envy The Plumber
BE ONE!

The world demands modern Plumbing and Skilled Trained Mechanics to do it. It is a well paying field. Make $60 to $100 a week or start own shop. We train you quick. Learn in 6 to 12 WEEKS to do any job. We shall and reliable. Send for big free book explaining Birth by Cost and practical Home Study. Investigate today. Amazing offer. Low tuition. World's greatest school.

Write—
UNIVERSAL PLUMBING SCHOOL
2121 Troost Ave. Kansas City, Mo.

LAW STUDY AT HOME

$10,000 to $10,000 Annually

We guide you step by step. You can train at home during spare time. Degree of LL.B. conferred. Low cost, easy terms. Get our valuable 64-page "Law Training for Leadership" and "Evidence" books FREE. Send for them now.

LaSalle Extension University, Dept. 482-L Chicago
The World's Largest Business Training Institution

ENGINEERING *and* **ARCHITECTURE**
ELECTRICAL · MECHANICAL · STRUCTURAL

Interesting, Practical, Technical Courses. Degree in 2 years. Diploma in 1 year. Special short courses 6 weeks to 6 months in Electricity, Radio, Power Plant Practice, Refrigeration, Aeroplane, Welding, Wiring, Testing, Heating, Welding. Low Tuition. Expert Instructors. Extensively equipped laboratories. Free life time employment service for graduates. Part time work while attending. Write for new free illustrated catalog giving all facts. Send today.

FINLAY ENGINEERING COLLEGE
3361-B Indiana Ave. Kansas City, Mo.

"STAMMERING"
Its Cause and Cure"

You can be quickly cured of your stammer. Send 10 cents (coin or stamps) for 238 page cloth bound book on Stammering and Stuttering. It tells how I cured myself after Stammered for 20 years.

BENJAMIN N. BOGUE
1188 Bogue Building, 1147 N. Illinois St. Indianapolis

AVIATION Information FREE

Send us your name and address for full information regarding the Aviation and Airplane business. Find out about the many great opportunities now open and how we prepare you at home, during spare time, to qualify. Our new book "Opportunities in the Airplane Industry" also sent free if you answer at once.

AMERICAN SCHOOL OF AVIATION
Dept. 1344 3601 Michigan Ave., CHICAGO

RICHES IN MYSTERIOUS OCEAN SHELLS

Continued from page 142

broken, and the only way one of these univalve can be removed after it has gripped the rock is by smashing it.

When the diver gets the end of his bar under the abalone he gives it a quick hit and a dexterous turn, throwing it over on its shell so that it has nothing to grip with its powerful foot. Then the diver drops the catch into the basket. When this receptacle is filled, usually with some two dozen abalones, he signals for a haul-away and a new basket.

AS THE abalones reach the boat one is placed shell down on a flat board. Then the open side of another is laid on the open side of this first shell. Both clamp together immediately. A third is then laid with its open side on top of the shell of the second, a fourth on top of the third, and so on until a solid column is built up as high as the fisherman can reach. The abalones, of course, immediately grip the shell beneath and the column becomes solid. Then these "piles of abalones," are laid, like logs, in the bottom of the boat, where they remain clinging solidly to each other until they are separated at the packing plant on shore.

Meantime the man with the long lance has cut away hundreds of pounds of kelp leaves and branches as they swayed and swirled around the boat. This gives more light to the diver, enables his companions to see the bubbles and follow his course and gets rid of the entangling and deadly upper branches of the seaweed. Stalks of this kelp frequently are more than 100 feet long, six inches to a foot in diameter at the bottom, and as tough as rawhide.

Down below, the diver has his own problems. He must first pass through the forest of kelp whose trunks are grown firmly to the rocks, often only a foot or two apart and covering hundreds of acres. Tough as leather, resilient as rubber and moved constantly by the currents, these long, smooth trunks seem to seize and hold everything that comes within their reach. If the diver becomes entangled, as he not infrequently does, he must cut himself free, without damaging or fouling his air line and without making incorrect signals for unwanted assistance on his lifeline.

When the diver has finished his working day of five hours, the boats are towed back to the packing plant. There the abalone meat is removed, divided into "light" and "dark," the shells thoroughly cleaned, the pearls preserved, and the flesh either packed for shipment to the fresh-fish markets or canned. After the large shells are dried, they are sent to the manufacturing jewelers and novelty makers, where they are converted into 273 different articles, including costume or "period" jewelry.

THERE is still much mystery about the abalone. Though it is a single-shelled slow-moving mollusk, not usually considered a migrant, it will fill, in one night, a location which, the day before, contained no abalones. Where it comes from is not definitely known, but it is believed that farther out, on great ledges, possibly at depths of 300 to 1,000 feet or more, there are vast colonies of these valuable shellfish, from which the younger members are crowded out so that they move inshore. Whatever may be the source, the rocks which the divers are able to reach are being refilled constantly with abalones. Few of these exceed twelve inches in diameter, while many are below the eight-inch limit, but every now and then a monster nearly a foot and a half across appears suddenly out of the deep.

Always Ready with the Right Answer

You need no longer puzzle over meaning, pronunciation, or use of words, or points of grammar, spelling, or punctuation. Look them up in

Webster's Collegiate

Best because it is based upon the Supreme Authority — Webster's New International Dictionary. **106,000 vocabulary** terms with **definitions, spellings, pronunciations,** and use of words; a dictionary of **Biography; a Gazetteer;** rules of **punctuation;** use of **capitals, abbreviations,** etc.; a dictionary of **foreign words and phrases.** Many other features of practical value. **1,256 pages; 1,700 illustrations.** Look for the Merriam Circular Trade-Mark—the sign of highest scholarship and accuracy.

[illegible] Paper Edition
[illegible] Cloth, $[illegible]
[illegible] Leather, $[illegible]

Get The Best

Put [illegible] your bookseller, or send order and remittance direct to us, or write for free information. Free specimen pages if you mention this paper.

[illegible]
99 Broadway
Springfield Massachusetts

MEN WANTED

20 to 35 years old

RADIO

First Lesson Free!

Broadcasting
Television
"Talkies"
Manufacturing
Service
Sales
Auto-Radio
Aviation

See how easy to learn

See how quickly you can get ready for well-paid positions in fastest growing, most prosperous industry.

Big demand right now from employers for broadcast operators, testers, inspectors, service-men, designers, installers, and "trouble-shooters".

$40 to $75 a week—and more!

With free radio lesson we'll send you our amazing combined training and employment agreement—good for help in securing a beginner's job *when you're only half way through*. Guarantees you help in finding a position, satisfactory in salary, after you finish, or money refunded.

A World of Opportunities to Choose From

Rockefeller is building a $500,000,000.00 "radio center" in New York. 20,000 movie theaters have gone "talkie". Auto-radio is selling like wild-fire. Midget sets are selling at rate of 10,000 a day. Aviation, television, servicing, sales—all these mean highly paid jobs and plenty of them. All you need to get one is the kind of training we give you, backed by a real placement service.

RADIO TESTER GIVEN

$20.00 set analyzer and trouble shooting chart is part of the training without extra charge.

Lesson FREE!

Mail Coupon

for free radio lesson and book of thrilling facts about this wonder-industry and how to "break in."

American School
Dept. R-448, Drexel Ave. & 58th St., Chicago

THE AMERICAN SCHOOL
Dept. R-448, Drexel Ave. & 58th St., Chicago
Please send without cost or obligation, free radio lesson and job ticket and radio bulletin.

Name.....*Age*.....

St. No......

City.....*State*.....

Burning Feet

Ended in 3 Seconds!

THOUSANDS get instant relief from sore, tired, burning, aching feet with this cooling, ivory white vanishing cream—Coolene. Its soothing healing oils and unguents quickly penetrate to the inflamed tissues—relieve congestion—and *all pain and burning in 3 seconds*. Does not stain. Get Coolene today!

WHY CAN'T MEN BECOME GIANTS?

Continued from page 63

and stronger material for making the bones, or he must admit a diminution of strength in comparison with men of medium stature, for if his height be increased inordinately he will fall and be crushed under his own weight."

The same principle applies to those inanimate giants like the Chrysler Building, which rear their heads 1,000 feet and more into the sky. If a structure of such height could be built of stone, the thickness of the walls needed to support the tower's weight would be so great as to defeat the purpose of a high building—namely, to provide maximum office space on a given ground area. However, steel in structural shapes supplies a material for the building's "bones" which makes them strong enough to carry the load without consuming too much floor space, thus making a 1,000-foot tower possible—and profitable.

BEING the largest of quadrupeds carries a penalty with it, for the elephant's mass, or weight, increasing as the cube of his height, requires such a correspondingly exaggerated development of his leg bones that his movements tend to be slow and clumsy. Certain activities, such as leaping fences, are taboo to the elephant.

Almost every one has noticed the more graceful proportion of young trees as compared with old ones. The reason becomes obvious when we apply Galileo's rule. Here the weight of the trunk, increasing as the cube of its height, requires that the trunk thickness vary as the square root of the cube of the height. Large trees, like large animals, therefore require larger underpinning.

It is plain from all that we have now found out that the force of gravity upon the earth sets a definite limit to the size of animals, including man. The giraffe, the ostrich, and the stork are striking examples of how Nature conforms to this rule by making tall animals of light construction. What would be the effect of Jupiter's force of gravitation upon its supposed human inhabitants? Since the mass exerting gravitational attraction increases with the cube of the diameter, Jupiter, with its 86,500-mile diameter, will exercise about 1,400 times the pull that the earth does with a mass proportional to its 8,000-mile thickness. Neglecting the effect of increased atmospheric density, a man on Jupiter would consequently weigh many times more, and his stature would be proportionately limited, or else Nature would shape him as a veritable stork or spider built to a small scale.

IN view of what has been said, it seems at first that the force of gravity is inoperative in limiting the size of whales, which are the largest living things upon earth. But we have only to remember that the whale's body displaces an enormous volume of water and that this displaced water, being unable to fill the space occupied by the whale, presses upon and supports his body with a force equal to its own weight. The surprising conclusion follows that the whale's body while immersed in the sea can be said to weigh nothing! The law controlling the growth of elephant and man is suspended for the whale's benefit, leaving him free from the limitation of size imposed upon animals who walk upon land.

The immunity from harm of a mouse falling down a mine shaft, and the fatal effects of such a tumble upon a man, both depend upon another application of our same rule—the surface varies as the square of the length, while the weight varies as its cube. Therefore the weight of the mouse is many times less, *in comparison to the surface of its body*, than a man's weight is to his body's surface.

A man in falling is accordingly held back very little by the resistance of the air, but the mouse, with a relatively enormous surface in proportion to its tiny weight, is held back so much that it is let down the shaft upon the equivalent of an "air-cushion," and reaches the bottom with a comparatively slight impact. Here too is the explanation of why tiny dust particles may float in the air for hours.

A SLIGHTLY different application of our infallible rule explains the small velocity needed, relative to the surrounding air, to keep a humming bird poised almost stationary. Here again, the tiny mass of the humming bird's body makes the impulses given to the air by the *surfaces* of its wings many times more effective than they would be were it the size of an eagle. The wing surfaces of the eagle, having a much greater proportionate weight to lift, must at first be aided by a short run along the ground, in order to attain a minimum flying speed. This is why a large bird can be effectively 'caged' in a small enclosure entirely open to the sky.

The explanation of man's inability to fly at all with wings propelled by his own muscular powers can be made plain by a few moments' comparison of the wing area needed to lift a human body with the mass of a man's breast and back muscles. These are comparatively small and weak when compared, size for size, with those of a bird like a sea gull. But in the last analysis, man's early dreams of flying with flapping wings were doomed by "the cube of his length," and the increase in muscle and bone strength needed for flight would still further increase the mass to be lifted. It is in fact doubtful whether a bird the size of a man could fly at all.

Man's weak leaping powers, as compared with those of a grasshopper, are already clear from his inability to fly. In his jumping ability he is earth-bound because of his large weight compared with his available muscular strength, irrespective of the specialized leg-structure which gives the grasshopper additional advantages.

GERMAN AIRSHIPS USE AMERICAN HELIUM

GERMANY'S latest super-Zeppelins, now under construction, will be floated with American helium gas. Dr Hugo Eckener, commander of the *Graf Zeppelin*, recently announced that satisfactory negotiations had been concluded for the export of this gas to Germany. It will be the first foreign shipment of its size. Hitherto U. S. Government authorities have guarded closely America's supply of helium, of which we have a virtual monopoly. However, recent discoveries of new fields and methods of quantity production assure the United States of more than enough for its own airships.

OFFICE EQUIPMENT IS MOVED BY PLANE

WHEN the National Air Transport recently transferred its offices from Hadley Field to Newark, N. J., it moved by airplane. Eleven airplanes took aboard the offices' entire equipment for the thirty-mile transfer, which was accomplished so quickly that the air line's business was not interrupted or delayed.

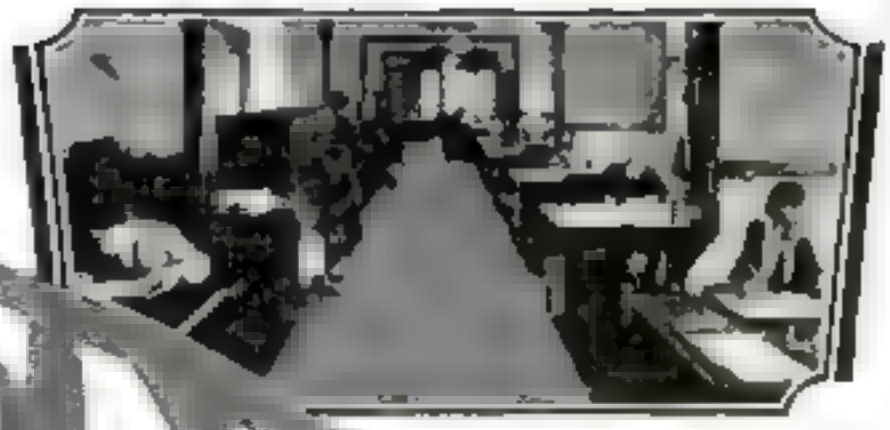

At the right is a view of my drafting and specification room. Here with a large staff of assistants all practice is in my constant supervision.

All drawings and specifications are prepared in my offices.

PATENTS

My Offices Just Across Street From U. S. Pat Office

Protect Your Ideas

Take the First Step Today—Action Counts

If you have a useful, practical, novel idea for any new article or for an improvement on an old one, you should consult with a registered Registered Patent Attorney AT ONCE. Every year thousands of applications for patents are filed in the U. S. Patent Office. Frequently two or more applications are made for the same or substantially the same idea even though the inventors may live in different sections of the country and be entirely unknown to one another. In such a case the burden of proof rests upon the last applicant. Delays of even a few days in filing the application often mean the loss of a patent. So lose no time. Get in touch with me at once by mailing the coupon below.

Prompt, Careful, Efficient Service

This large, experienced organization devotes its entire time and attention to patent and trademark cases. Our offices are directly across the street from the U. S. Patent Office. We understand the technical side of patent law. We know the rules and requirements of the Patent Office. We can proceed in the quickest, safest and best ways in preparing an application for a patent covering your idea. Our success has been built on the results of careful, efficient, and obliging service to inventors and trademark owners located in every state in the Union.

Strict Secrecy Preserved—Write Me in Confidence

All communications, sketches, drawings, etc., are held in strictest confidence in a vault of steel, fireproof files, which are accessible only to authorized members of my staff. Feel free to write me fully and frankly. It is probable that I can help you. Highest references. But FIRST, clip the coupon and get my free book. Do THAT right now.

No Charge for Information On How to Proceed

The booklet shown here contains valuable information relating to patent procedure that every inventor should have. And with it I will send you my Record of Invention form, on which you can sketch your idea and establish its date before a witness. Such evidence may later prove valuable to you. Simply mail the coupon and I will send you the booklet and the "Record of Invention" form together with detailed information on how to proceed and the costs involved. Do this NOW. No need to lose a minute's time. The coupon will bring you complete information entirely without charge or obligation.

Clarence A. O'Brien

Registered Patent Attorney

Member of Bar of Supreme Court of the United States; Court of Appeals, District of Columbia; Supreme Court, District of Columbia; United States Court of Claims.

PRACTICE CONFINED EXCLUSIVELY TO PATENTS, TRADEMARKS AND COPYRIGHTS

Inventors *Write for these* Free Books

Mail this Coupon *Now*

CLARENCE A. O'BRIEN
Registered Patent Attorney
883 Security Savings and Commercial Bank Bldg., Washington, D. C.
—OR—
Suite 1106, Dept. B4, Woolworth Bldg., New York City

Please send me your free book, "How to Obtain a Patent" and your "Record of Invention" form without any cost or obligation on my part.

Name

Address

(Important: Write or Print Plainly and Address Office Nearest You)

"I've lost a fortune" he cried!


He rushed headlong into our office. "I might have made $100,000," he cried, "but now I've lost everything!"

Between half-sobs and self-reproaches, he blurted out the miserable story. A year before he had come to us with an idea for an invention. It had merit and we made several suggestions for its development. We strongly advised a working model to check up on its operation. We pointed out that our 25 years of experience in developing inventions would enable us to make certain necessary improvements in his invention.

He left our office, went home to his workshop, developed a rough working model of his own against our advice and immediately had it patented. That patent was his proudest possession. He did not see as that the patent guaranteed him nothing but protection against infringements on the exact machine he had built.

In his haste, he overlooked the fact that a minor addition to his machine would so have broadened its use as to allow extensively larger basic patent claims, which might be of greater value in the future.

He overlooked it. But others had not.

No Wonder They FAIL!

Our guarantee protects you before disclosing to anyone, even to us. Write TODAY for Free Book "No Wonder They Fail."

BERNARD & HELLER
Complete Service to INVENTORS and MANUFACTURERS
31 East 17th St. New York, N.Y.

Inventions Promoted

Patented or Unpatented. In business over 30 years. Send drawing and description or model, or write for information. Complete facilities. References.

ADAM FISHER MFG. CO.
183-D Enright St. Louis, Mo.

PATENTS

ALBERT E. DIETERICH
Successor to Fred G. Dieterich & Co.
REGISTERED
PATENT LAWYER and SOLICITOR
661-A Ouray Building
30 Years' Experience Washington, D. C.

DEVELOPED PATENTS
MANUFACTURERS
WE HAVE perfect working models of practical sound inventions where manufacturing costs are in keeping with sales prices. *Write or call us today!*
BERNARD & HELLER
31 EAST 17th ST. NEW YORK, N.Y.

DON'T LET RULES MAR YOUR HOUSE

(Continued from page 77)

Within the entrance, at the left is a closed stairway to the second floor—closed for economy of space. The entrance hall is small but adequate, with coat closets at the right. Directly in front, as one enters, is the living room, which, as I think should always be the case, is the heart of the whole house.

At the right, as one enters, is the entrance to the porch. At the left is a large fireplace with built-in bookcases of unequal size in the wall space flanking it. The south side of the house has many windows, and this effect is accented in the living room by a large bay thrust out to the south. From the open porch there is a short step down to the terrace in the lawn along the south side of the house.

ALL wall papers and furnishings on the first floor are early American in character. Incidentally, most of the furnishings are at least 150 years old, in my wife's family or my own for several generations.

The woodwork throughout the house is finished in enamel, but not in the usual chilly white or light tints. It is done in a warm shade, very nearly what one might call buff. Floors are of oak.

The closed stairway and the second floor hall have plenty of natural light from a north window—the only window on that side of the house. There are three bedrooms on the second floor, the main one being in the east end, having windows both east and south. Ceilings here are seven feet, four inches, which is six inches lower than those of the first floor. Low ceilings give a feeling of intimacy and snugness.

The bath is in the northeast corner of the second floor, thus concentrating the plumbing with that of the kitchen in that portion of the structure. The bath is simple and small, having lavatory, water closet, and recessed tub with combination shower. While the floor is of tile, the walls are not, as in a house of this type it is better to be able to change the color scheme of the walls at will. This can be done easily from time to time with water-proof paint. With tile it is much more difficult to do this. A good paint, properly applied, is nearly as practical as tile.

A hot water system of heating with complete thermostatic control is located in the basement, and this system also heats the garage. There is also a well-equipped laundry in the basement.

A chimney, essential in this climate, is nothing of which to be ashamed, and it should not be taken lightly. Properly treated the chimney may add much to the house's appearance and air of completeness. From the standpoint of economy and practicability, we built one main chimney approximately in the center of the house, possessing three flues that serve the fireplace, the gas range in the kitchen, and the heating plant.

CONTRARY to the general practice of making the chimney as short as possible, this one, of common brick, extends fully six feet above the ridge of the roof. It is appropriate to the pre-Georgian precedents followed in designing this house.

The roof is of plain, unstained, cedar shingles, as I have great faith in the value of such roofing. With the possible exception of slate, many colored and artificial roofing materials fade or discolor and are not altogether satisfactory.

Considerable planting has been done about this home. There is a lusty young elm in the lawn near the street while shrubbery, chiefly of a low-growing variety, softens the severe lines of the house.

Eagles of the Air


YOUNG MAN
will You be prepared for the
New Opportunities
IN
AVIATION

Both In the Air and On the Ground?

Aviation has already absorbed thousands of ambitious young men—but it has just started to grow. New airports are being built and improved. New air lines are being inaugurated. More executives, pilots, mechanics, and ground men of every class are needed.

At the Von Hoffmann School, training for every branch of Aviation is thorough and complete. It exceeds the requirements of the Government. The perfect flying climate permits instruction every day in the year. Von Hoffmann graduates are leaders. So, if you would prepare yourself for a place in the Aviation industry, get the best. Send in the coupon below and we shall be pleased to send you full particulars.

VON HOFFMANN AIR COLLEGE
840 Lambert-St. Louis Flying Field, St. Louis, Mo.

Name
Address
City State
Age
I am interested in
MECHANICS COURSE
HOME STUDY

UNPATENTED IDEAS CAN BE SOLD

Write W. T. Greene
Washington, D. C.

PAINT SIGNS and SHOW CARDS


DETROIT SCHOOL OF LETTERING
DETROIT, MICH.

INVENTIONS WANTED

Patented or unpatented. If you have an idea for sale, write HARTLEY'S Inc., Box 928-D, Bangor, Maine.

PATENTS
TO THE MAN WITH AN IDEA
Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request.
IRVING L. McCATHRAN, Patent Lawyer
Washington, D. C.
New York City
TRADE-MARKS

A definite program for getting ahead financially will be found on page four of this issue.

CHAIN BROADCASTS ON ONE WAVE

Continued from page 82

a vacuum tube, will produce electrical oscillations at one undeviating rate so long as its temperature remains constant and there is no mechanical change in the mounting. The variation with temperature changes is relatively slight, and was not considered when quartz crystals first came into use to control broadcast frequencies. The latest practice is to inclose the entire quartz control unit in a heavily padded box which is maintained at constant temperature by an electric heating element controlled by a thermostat.

The quartz crystal oscillator forms the basis on which several different systems for synchronous broadcasting have been worked out. On page eighty-two our artist has drawn a synchronous broadcasting set-up for two stations. Two quartz crystals are carefully matched to oscillate at precisely the same frequency.

One of this matched pair is connected in at one station and then forms the master control. The other crystal is applied to control the frequency of the other station. In the hook-up of this second crystal there is provided an adjustment capable of shifting the oscillation of the crystal a few cycles either way. This is necessary because even a crystal oscillator will change slightly.

AT SOME convenient point about midway between the two broadcasting stations there is placed an ordinary receiving outfit which is permanently tuned to the wave on which the stations are to operate. This monitoring station is connected by wire line to the station at which is located the controllable crystal. The operator detailed to monitor service listens to the reception at the mid-point between the two stations and adjusts the crystal control at his station so that it is at all times in step with the master crystal.

Another scheme that is undergoing tests is to send out from the master control station a short carrier wave modulated by the frequency at which it is desired to operate the group of stations. At each station in the chain the frequency of oscillation is controlled by the oscillation sent to it from the master station by way of the short wave.

Still another method is to transmit by way of the wire lines a low frequency oscillation and then make the various transmitters oscillate at some designated multiple or harmonic of this frequency.

It is easy to see why thousands of listeners will benefit by synchronous broadcasting. Assume, for example, that a man lives so far from one transmitter that he cannot get satisfactory reception. In many such cases the nearest station in another direction that is transmitting the same program on a different wave also cannot be heard with sufficient volume. When these two stations are synchronized on the same wave the man will get the combined effect of both stations, and this will give him adequate volume.

SYNCHRONOUS broadcasting by two stations already has been successfully accomplished. The Federal Radio Commission has sanctioned more elaborate tests.

It now remains to be seen whether unforeseen technical difficulties will prevent synchronizing more than two or three stations. If none arise we may confidently expect in the near future as many as seventy-five stations all broadcasting the same program at the same time on the same wave length. This will leave room for seventy-four new stations to furnish us as many different programs from which to choose during the chain broadcasting hours!

PATENTS TRADE-MARKS AND COPYRIGHTS

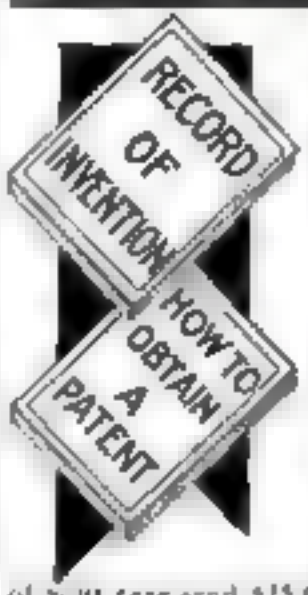

OUR OFFER: FOR PROTECTION OF YOUR INVENTION

YOUR FIRST STEP. The inventor should write for our blank form "RECORD OF INVENTION." A sketch and description should be made on this Blank, signed, witnessed, then returned to us. We also give our opinion as to whether the invention comes within the Patent Office definition of a patentable invention. This Record of Invention will serve as proof of conception. **There is no charge or obligation for this service.**

Write for Our Illustrated Guide Book
HOW TO OBTAIN A PATENT

Contains full instructions regarding U. S. Patents and Trade marks. Our Methods, Terms, and 100 Mechanical Movements illustrated and described.

All Communications and Data Strictly Secret and Confidential

DELAYS ARE DANGEROUS IN PATENT MATTERS—IMPORTANT! To Avoid Delay!
YOU SHOULD HAVE YOUR CASE MADE SPECIAL IN OUR OFFICE to save correspondence, secure protection and early filing date in the Patent Office. To secure special preparation of your case send $25.00 on account with model or sketch and description of invention. If the invention is not patentable we will return fee less cost of search.

Our Lawyers Practice in all U. S. Courts and Defend Clients in Suits

PAYMENT OF FEES IN INSTALLMENTS
We permit our clients to pay for their applications in three installments as the preparation of the application progresses in our office.

Highest References—Prompt Service—Reasonable Terms

WRITE TODAY

FREE COUPON

VICTOR J. EVANS & CO.
Registered Patent Attorneys; Established 1898
MAIN OFFICES: 760 Ninth St., Washington, D. C.
BRANCH OFFICES: 1007 Woolworth Bldg., New York City, 1640-42 Conway Bldg., Chicago, Ill. 514 Empire Bldg., Pittsburgh, Pa.; 630 Fidelity Phila. Trust Bldg., Philadelphia, Pa. 1010 Hobart Bldg., San Francisco, Calif.

Gentlemen: Please send me FREE OF CHARGE your books as described above.

Name

Address

PATENTS
TRADE-MARKS
DO NOT LOSE YOUR RIGHTS TO PATENT PROTECTION

Before disclosing your invention to anyone, send for Blank Form for Record of Conception and Disclosure.

LANCASTER, ALLWINE & ROMMEL
Registered Patent Attorneys
274 Ouray Bldg., Washington, D. C.
Originators of Form — Evidence of Conception

PATENTS

As one of the oldest patent firms in America we give prompt, efficient, and personal service. Our charges are reasonable and terms arranged to meet the needs of inventors. Booklet and form for disclosing invention sent free. Highest references furnished. Write today.

Lacey & Lacey, 638 F Street, N. W. Dept. 10
Washington, D. C. Established 1869

$10,000
Protection Against
ACCIDENT
and
SICKNESS
For Only $10. YEAR No Dues or Assessments
Men, Women 16 to 70 accepted
NO MEDICAL EXAMINATION
Policy Pays

$10,000 for loss of life, hands, feet or eyesight. Many benefits for other losses. $25 Weekly benefits, doctor and hospital bills. Covers Automobile, Travel, Pedestrian and many common accidents. Covers many common sicknesses, including typhoid, appendicitis, pneumonia, etc., etc. Largest and oldest exclusive Health and Accident Insurance Company in America. Don't delay, you may be next to meet sickness or accident. Mail coupon today for free descriptive literature.

North American Accident Insurance Co.
961 Wallach Bldg., Newark, New Jersey

Name

Address

City and State

AGENTS WANTED for Local Territory

PATENTS SECURED
TRADE-MARKS REGISTERED

HIGH-CLASS Professional Service for Inventors and Trade Mark Owners necessary for PROPER PROTECTION. WE OFFER you our facilities on Reasonable Terms. If you have an invention send us a model or sketch and description and we will give you our opinion as to its patentable nature. Write for our Free Book, "HOW TO GET YOUR PATENT" and Record of Invention Certificate sent without charge. DELAYS are DANGEROUS in PATENT MATTERS.

WE ASSIST OUR CLIENTS TO SELL THEIR PATENTS
TERMS REASONABLE — BEST REFERENCES

WRITE TODAY

RANDOLPH & COMPANY, Patent Attorneys
Dept. 130 Washington, D. C.

Name

Address

QUALIFY FOR THE OPPORTUNITY TO WIN $700.00

THE hunt is about to start. The hounds have been unleashed and are impatient to pick up the scent. Somewhere in the park are two dogs exactly alike—identical in the eye in size in markings on the ears, bodies, heads and tails. How well developed are your powers of observation? How quick is your eye? Can you find the twin dogs? It will cost you nothing to try for the Grand Prize which will be awarded according to the contestants' standings when the final decision is made.

If you can find the twin dogs send the numbers together with your name and address. Six thousand dollars to be paid in 10 equal first prizes. Each one $600.00 or a brand new Chevrolet. Four sedans, the latest 1931 models with many extra features ($1068.00 each—and an extra one by being prompt—making a total first prize of $4,272.00). If you prefer an allowance on the first prize there are dozens of other worthwhile prizes with a wide range in the values in this unique and yet easy to enter program. Duplicate prizes will be awarded in case of ties. Solutions will not be accepted from persons living in Chicago or outside of the U. S. A. Mail your answer today.

W. C. DILLERO,
Dept. 196 161 N. Dearborn St., Chicago, Ill.

LAW Free Book

Write for free book today.

BLACKSTONE INSTITUTE,

Government Positions

Clerk Carriers, Rural Carriers, Railway Postal Clerks, Postmasters, Department Clerks, and many others. Splendid salaries, easy work, vacation with pay. Only common school education required. Examinations often. 44,879 appointed last year.

Valuable Information Free

COLUMBIAN CORRESPONDENCE COLLEGE, WASHINGTON, D. C.

NEW LOW PRICES

Lowest Prices on Earth!

Don't Delay—Order Today

DEALERS WANTED

YORK TIRE & RUBBER COMPANY Dept. 128
3868 Cottage Grove Ave. Chicago, Illinois

WANT a Government Job?

RAILWAY POSTAL CLERKS

$158 to $225 Month

Mail Coupon Before You Lose It

FRANKLIN INSTITUTE, Dept. A266
Rochester N. Y.

Sirs: Rush to me without charge copy of 32-page book "How to Get U. S. Government Jobs." list of positions open to men—women 18 to 50 and full particulars telling how to get them.

Name.

Address

City Carriers—Postoffice Clerks—General Clerks
Inspectors of Customs—Immigrant Inspectors
Steady Work—No Layoffs—Paid Vacations

HOW I BREED LIONS

(Continued from page 59)

ills. But the whiskers are worth more where they are and besides, who's going to pull them out?

Depending upon size, sex, condition, and other points, a three-year-old, well developed lion is worth from $1,000 up. Diet, surroundings, and such other conditions as contribute to the health and appearance of the big cats are carefully watched.

Should one of the husky youngsters develop unusual meanness or become too much of a bully, he "gets a tag," and is sent to "solitary" until he is willing to be good. When rough or quarrelsome, lions accumulate scars and occasionally become cripples, and a scarred or crippled beast represents an actual loss in value.

IT HAS been learned that lions are not seasonal in their breeding habits, and though certain pairs are more companionable and show marked affection for each other the female will mate with any lion. The litters are from one to four, with males predominating. Most females have two litters per year. Rosie, the first mother lioness I had, produced forty cubs up to her death three years ago.

The lioness is a notoriously poor mother, in many cases being neglectful to the point of walking off and leaving her young. We have found that this is quite likely to happen when there is only one cub.

New-born cubs are spotted all over and retain their spots until they are about two months old. This it is said is Nature's means of protecting them from their natural enemies, the spots providing an effective camouflage until the cubs are old enough to scamper out of danger's way.

Not long ago a curious phenomenon took place at our farm when a litter of four snow white cubs arrived, the only ones of their kind so far as I know. Two had blue eyes, the other pair being pure albinos with pink eyes. But they didn't live long. Had they survived, they would have been worth a fortune. If even one had reached maturity it would have been difficult to estimate his value.

A lion grows until he is seven years old and is not used for breeding until maturity. The lioness is bred at six years, which explains why only 150 lions have been raised over a period of ten years. Sickness and deaths have occurred, but the mortality percentage is small.

APPENDICITIS, pneumonia, and cirrhosis of the liver are the diseases to which our lions are most susceptible. The administering of the medicines, in some instances, is a difficult undertaking. Sometimes not enough, or too much, is given. In the case of Rosie, it was an overdose of medicine that caused her death.

A fact that few people know is that lions of the veldt and the jungle are never as handsome as those raised in captivity. Especially is this true of the males. The wild lion gets thorns and burrs in his mane as fast as it grows and in removing these with his claws much of the hair is pulled out. It is therefore the captive lion that exhibits the finest mane.

At our farm, the animals act as naturally as though they were at home on a sun-dried veldt of South Africa.

In its wild state, the lion is difficult to observe. Danger is involved in prying into its intimate affairs on its native stamping ground. But, at our lion farm, they can be safely studied close at hand. With nearly 200 animals under observation, interesting new facts are being added to the store of information about this King of Beasts.

This One
FQTW-G6Z-UNK

ARE YOU READY FOR A BETTER JOB?

Success Comes to Those Who Know the HOW and WHY.

offers a field that will never be over-crowded. Interesting. Well paid. Start at once to get practical working knowledge.

BOOK-A-MONTH STUDY PLAN

The easiest, surest way is study. Read a book a month. Everything simple and clear. Test questions and answers bring out your strong points. Helps you to speedy promotion.

AUDEL'S NEW ELECTRIC LIBRARY

Makes electricity as easy as A B C for beginners, students, engineers, electricians, and others who want to get ahead. Starts from the very beginning and takes you step by step through all the important subjects. Each volume is complete in itself. Thousands of pictures, diagrams, tables, formulas, questions and answers. Over 3000 pages. Size 6½ x 9¼ inches. Only 4 inches thick. Weight about 10 lbs. per volume. Bound in flexible leather. Gold edges. Pocket size.

Helps electrically as any A B C for beginners, interesting as fiction, and more easily understood. Just the thing for home study and reference. Complete—practical—up to date. Now from Cover to Cover. Covering thousands of electrical subjects with Questions Answered. Diagrams, Facts and Figures relating to Magnetism, Armature Winding, Dynamos, D. C. Motors, Maintenance and Trouble Shooting Tests, Storage Battery, Alternating Current, Power Factor, Transformers, A. C. Motors, Wind-ups, Converters, Switches & Fuses, Relays, Condensers, Rectifiers, Meters, Power Station Practice, Motor, Light & Power Wiring, High Tension, Calculations, Code, Electric Railways, Elevators, Gas Engines, Auto & Aero Ignition, Radio, Telephone, Telegraph, Motion Pictures, Talkies, Lighting, Electric Refrigeration, X-Ray, Welding, Pumps, Compressors, Appliances, Air Conditioning, Practical Mathematics, A New Electric Dictionary. Fine paper binding. Illustrations, diagrams.

For more information on sound-free Electric Folder (Free)

No Money Unless You Are Satisfied

Send for first book on week's trial at publisher's risk. If not satisfied you pay $1 for shipping return book. Keep five days for reading. Then if you decide to keep books, send $2 and $2 a month until $19.80 is paid. Otherwise return books. Don't send money now.

MAIL THIS COUPON TODAY

THEO. AUDEL & CO., 65 W. 23rd St., New York City

Mail Vol. ..... Electric Library on 7 days free trial. If O. K. I will remit $1 in seven days and $2 a month until $19.80 is paid. If not O. K. I will return it. I also request you to mail me free each month an issue of ..... without charge. No obligation unless I am satisfied.

Name .....

Address .....

Occupation .....

Employed by ..... P. R.

New Kind Of Can Opener

Works Like Magic!

An automatic, simple to use can opener. Cuts the can close to the top and around the side where the can is strongest. Leaves no sharp edges. Cuts any size can. Can be operated by anyone. Has suction cup which clings to any smooth surface. Can be used on wall, table or shelf. Has cutting wheel of hardened steel. Will last a lifetime. Handy for the housewife, camper, motorist, etc. Send no money. Pay postman $1.98 plus postage on arrival. Or send $2.00 and we will pay postage.

AGENTS

Write for our liberal proposition.

United States Mfg. Co., Dept. D-444
4500 Mary Ave., St. Louis, Mo.

Learn Photography at HOME

Make money while you learn. Prepare quickly in your spare time. Also earn while you learn. No experience necessary. New easy method. Nothing else like it. Send at once for free book. *Opportunities in Modern Photography*, and full particulars.

AMERICAN SCHOOL OF PHOTOGRAPHY
Dept. 1344, 3601 Michigan Ave. Chicago, U. S. A.

High School Course in 2 Years

You can complete this simplified High School Course at home in two years. Meets all requirements for entrance to college and the leading professions. This and thirty-six other practical courses are described in our Free Bulletin. Send for it TODAY.

AMERICAN SCHOOL
Dept. H-44 Drexel Ave. & 58th St., CHICAGO

A definite program for getting ahead financially will be found on page four of this issue.

GUS GIVES POINTERS ON CAR BUYING

Continued from page 148.

The same thing applies to batteries. They're like tires—only good for so long anyhow. A battery that'll start the second-hand car in fine style when you get a demonstration may go all to pieces in six months. Sometimes a new car battery does that too, but not if you take care of it."

"Why couldn't you take care of the second-hand car battery the same way and get the same results?" Bill broke in.

Because," Gus explained, "taking care of a battery isn't going to put back the material that's fallen off the plates or patch up the holes in the separators that are going to cause short circuits. Babying along a bum battery after it starts to go bad is a waste of time.

"THAT'S two items," Gus continued, "and there's a lot more. You can't tell how much carbon there is in the cylinders or even how many miles it'll be before the valves will need regrinding just by lifting the hood and looking at the motor. How long will it be before the starter motor itself is going to need attention? Or the generator? Or the clutch? Or the brakes need relining? You can't tell from the outside. That's where the gamble comes in. Maybe not one of these parts will give you a bit of trouble for years. Then again they may all go on the blink the first month and that's just your hard luck.

"There's another thing," he went on. "When you buy a secondhand car, it's already out of date. Suppose it's three years old when you get it. Look around and see how the cars that are five years old look to you today. Kind of ancient, don't they? Your three-year-old car is going to look just as ancient to you and everybody else in only two years.

"Don't get the idea that a secondhand car is always a lemon," Gus cautioned. "It may be a much better buy than a new car. When a man buys a new car he pays the factory price plus the freight charge and also a 'service' charge, so what he pays is a lot more than the advertised price. Then if he drives it for a couple of months and tries to sell it, he has to take a big loss even if the car looks just like new and is in mechanically perfect condition. It may be even better than new if he's broken it in real carefully. If he keeps it over a year and then tries to sell it, he has to take two years' depreciation instead of one.

"MAYBE he has kept it in perfect shape and only driven it three or four thousand miles. Figured on a dollars per mile basis, the fellow that buys that car is getting a real bargain. It's only a tenth worn out any way you figure it, and he gets it for half or maybe a third of what it cost."

"Sure sounds like a bargain the way you put it," said Bill. "But why does the fellow that bought the car in the first place sell it so cheap?"

"That's just human nature again," Gus maintained. "He's like the woman who throws away a perfectly good pair of shoes or a dress and buys a new dress or shoes just because the ones she had weren't exactly like what every other woman happened to be wearing that particular month. Keeping up with the styles is fine, son, if you can afford it."

"Then," said Bill, "you think I'd be taking less chance on buying a new car but I might get a much better bargain in a secondhand one?"

"That's about the way it sizes up," Gus grinned. "Like a lot of other propositions it all depends on how you look at it!"

Learn Electricity IN LOS ANGELES

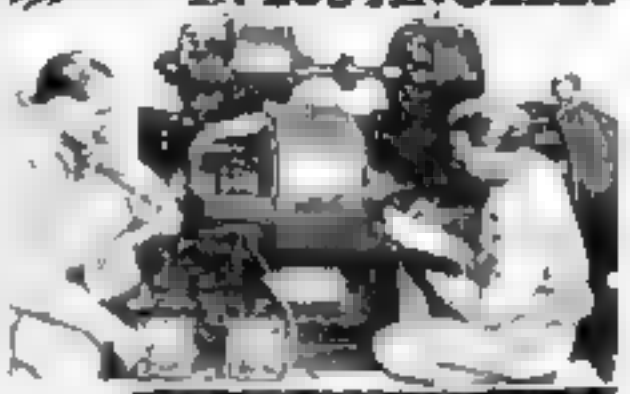

LEARN RIGHT!

You need GOOD TRAINING to earn BIG PAY!

National Electrical School—a Million Dollar Institution—established in 1905—is recognized throughout the electrical industry as the foremost school of the West. National gives you practical intensive training in all electrical branches. No age limit. No previous experience necessary. Life Scholarship privileges. Unlimited training prepares you for bigger opportunities. Start any time of the year. Individual instruction under Experts.

Qualify Quickly for Big Pay Jobs!

We train you *right* in the *shortest possible time*. Our condensed practical training in one of the best equipped schools in the country qualifies you as a Skilled Electrician. Don't take a chance without this training. NOT a Correspondence Course!

Don't Worry About Enough Money! We'll Help You!

If you are low on cash, we'll make it easy for you to get National Training. We help you secure part-time jobs to earn living expenses while learning. Unlimited Lifetime Employment Service assures proper co-operation in getting started in the electrical game. The Electrical Industry needs you as soon as you can get this training—that's why its easy for us to help you.

Your RAILROAD FARE ALLOWED to Los Angeles!

We'll allow your railroad fare from any point in the United States. Come West, get trained, enjoy life, and make more because you are qualified. This offer is made for a limited time only, to encourage men seeking the best training.

NEW Descriptive Book Tells Everything!

Fill out coupon now—and mail it today for full details of the greatest offer ever made ambitious men. You'll never equal this great offer—so send today for the complete story. Mail this coupon at once. Get names and addresses of many of our 25,000 Graduates.

WRITE for FREE BOOK NOW

NATIONAL Electrical School



Dept. ..... 4000 S. Figueroa Street, Los Angeles, California

Please send me your free illustrated catalog of Electrical Courses, including free 3 year service and part time employment plan.

Name .....

Address .....

City ..... State .....

"You won't be laid off!"

"It's tough when fellows get laid off. They've been cutting down some at our plant and everybody has been worried, wondering where the axe would fall next.

It made me feel so darn good to say when the boss spoke, and said he had a better job in mind for me. 'It's trained men like you we need around here,' he said, and I can bet we must get some of the untrained go. If those fellows had used the spare time and money to study with the International Correspondence Schools, we'd be right glad to keep them on. Those men never need to worry about their jobs here."

• • •

Today in all parts of the world, through training supplied by the I. C. S., men are winning promotion, higher salaries, better positions. Every month hundreds report voluntarily that I. C. S. training has helped them gain advancement, better pay, more congenial work. Is it not plain that you can become a trained man? Why not find out how?

Just mark and mail the coupon today

INTERNATIONAL CORRESPONDENCE SCHOOLS
"The Universal University"
Box 7485 F, Scranton, Penna.

Without cost or obligation, please send me a copy of your booklet "Who Wins and Why" and full particulars about the subject before which I have marked X

TECHNICAL AND INDUSTRIAL COURSES

☐ Architect	☐ Bridge Engineer
☐ Architectural Draftsman	☐ Bridge and Building Foreman
☐ Building Estimating	☐ Chemistry ☐ Pharmacy
☐ Civil Engineer	☐ Coal Mining Engineer
☐ Concrete Construction	☐ Navigation
☐ Contractor and Builder	☐ Steam Engineering
☐ Electrical Engineer	☐ Steam Electric Engineer
☐ Electric Lighting	☐ Textile Overseer or Supt.
☐ Electric Wiring	☐ Toolmaker
☐ Heating and Ventilating	☐ Welding, Electric and Gas
☐ Highway Engineering	☐ Wireless Operator
☐ Lighting Engineer	☐ Woolen Manufacturing
☐ Mechanical Engineer	☐ Mine Foreman
☐ Mechanical Draftsman	☐ Fire Bosses
☐ Mechanician	☐ Gas Engines
☐ Mechanical Engineering	☐ Diesel Engines
☐ Mine Surveying and Mapping	☐ Aviation Engines
☐ Model Maker	☐ Agriculture
☐ Patternmaker	☐ Mathematics
☐ Pipefitter	☐ Radio
☐ Plumbing	☐ Poultry Farming
☐ Radio Engineering	☐ Spanish
☐ Reading Shop Blueprints	☐ French
☐ Refrigeration	☐ Salesmanship
☐ Sheet Metal Worker	☐ Advertising
☐ Shop Practice	☐ Service Station Salesmanship
☐ Steam Engineer	☐ First Year College Subjects
☐ Steam Fitting	☐ Business Correspondence
☐ Structural Draftsman	☐ Lettering Show Cards
☐ Structural Engineer	☐ Stenography and Typing
☐ Surveying and Mapping	☐ Business Law
☐ Telegraph Engineer	☐ Commercial
☐ Telephone Work	☐ Grade School Subjects
☐ Textile Manufacturing	☐ High School Subjects
☐ Toolmaker	☐ College Preparatory
☐ Welding, Electric and Gas	☐ Illustrating ☐ Cartooning
☐ Wireless Operator	☐ Lumber Dealer

BUSINESS TRAINING COURSES

☐ Business Management	☐ Traffic Management
☐ Industrial Management	☐ Accountancy and Training
☐ Personnel Management	☐ Cost Accountant
☐ Traffic Management	☐ C. P. Accountant
☐ Foremanship	☐ Bookkeeping
☐ Industrial Management	☐ Secretarial Work
☐ Stenography and Typing	☐ Spanish ☐ French
☐ Business English	☐ Salesmanship
☐ Civil Service	☐ Advertising
☐ Railway Mail Clerk	☐ Better Letters
☐ Grade School Subjects	☐ Show Card and Sign Lettering
☐ High School Subjects	☐ Stenography and Typing
☐ College Preparatory	☐ Business English
☐ Illustrating ☐ Cartooning	☐ Civil Service
☐ Lumber Dealer	☐ Railway Mail Clerk

Name ..... Age .....

Street Address .....

City ..... State .....

Occupation .....

If you reside in Canada, send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada

How To Secure A Government Position



Why worry about strikes and hard times? Get a Government position with increased salaries, steady work, and a real pay envelope. Let Patterson help you. Hundreds of Successful Post Office Clerks, City Mail Carriers, Rural Carriers, Railway Mail Clerks, Customs Inspectors, Immigration Inspectors, Internal Revenue Agents, Prohibition Agents, Secret Service Operators and other Government employees wanted. Full information regarding the preliminary examinations. Write today. Mention Popular Science Monthly.

Now FREE My 32-page book tells about the jobs open, how to get them, and how you get one. Send the coupon for your copy TODAY.

A. R. PATTERSON, Civil Service Expert,
PATTERSON SCHOOL, 184 Wisner Bldg., Rochester, N. Y.

Please send me without obligation, your free book, How to Secure a Government Position.

Name .....

Address .....

MIGHTY LANDSLIDES REMAKE THE EARTH

(Continued from page 41)

rains, earthquake tremors, and extensive mining operations all contributed to this disaster.

The most stupendous of all known landslide disasters occurred as recently as the year 1920 in the province of Kansu, China, when a great earthquake precipitated colossal masses of the soft "loess" soil into the valleys. A vast area was affected, and though the region is not densely populated it was estimated that fully 100,000 lives were lost.

On February 18, 1911, at Sarez, in the Pamirs of Central Asia, a mass of rock containing 3,270,000,000 cubic yards and weighing 7,000,000,000 tons fell suddenly through a height of 900 to 1,800 feet. The resulting shock was registered by a seismograph at Pulkova, nearly 2,000 miles away, yet the energy of this mighty landslide was calculated to be only about one thousandth that of the earthquake that occurred in California in 1906.

The same force of gravity that causes landslides is responsible for a slow downward movement of surface material on the sides of hills and mountains.

THIS movement is usually too slow to be seen, but it results in a gradual accumulation of material at the base of slopes.

The creeping of a mountainside generally does not extend to a great depth, but in the case of Monte Arbino, the celebrated "moving mountain" in the Swiss canton of Ticino, the whole mountain is gradually settling and spreading laterally. These movements have been carefully measured for many years by Swiss government engineers, who have established numerous observation points on the mountain for this purpose.

During the first quarter of the present century the lateral movements of this mountain averaged two to six inches a year. In 1925 the rate increased to ten inches and in 1926 to eighteen inches. In 1927 the mountain side slipped about five feet, and during the first nine months of 1928 it advanced forty-six feet. On the first of October the rate of movement had become six inches an hour.

Long before this date the prospects of a general collapse led the authorities to order an evacuation of the danger zone. Hence there was no loss of life when, on October 2, 1928, upwards of 30,000,000 cubic yards of earth and rocks fell in a succession of cyclopic cascades into the adjacent valleys, burying forests, fields, houses, and roads, and, by damming a stream, formed a lake that may eventually be a source of disastrous floods in the surrounding country.

A correspondent of the London *Times* who visited the scene of this remarkable slide on October 8, when much material was still falling, wrote:

"THE top of the moving mountain has subsided by at least 150 feet and the whole region looks like a battlefield. Small rocks continually crash down into the valley, and their rattling is like the noise of quick-firing guns, while the clouds of dust rising from the places where the falling rocks strike and burst into pieces remind one of the bursting of hundreds of shells. From time to time a bigger boulder on the opposite ridge begins to oscillate and then to roll, makes amazing leaps down the slope, causes the unsteady ground to shake, and finally crashes at the bottom with a noise like thunder."

Monte Arbino is still moving, but the movements are now confined to the upper slopes and further downfalls comparable in magnitude to the one of 1928 are not looked for by the Swiss geologists.

34 Lesson Drawing Course 2.98

The biggest value you ever saw advertised anywhere . .

Haven't you often wished that you could draw cartoons, illustrate magazine jokes, sketch some pretty face, etc.? You can do all of these things—one of America's most famous artworks and illustrators has developed a great simple system for success in all branches of Commercial Art. This system has revolutionized the entire theory of drawing. It proves that drawing can be as easy for you as writing—much simpler than learning shorthand, bookkeeping or typewriting. We are now putting this original course for learning Drawing, Art and Cartooning, consisting of 34 lessons with over 500 illustrations, within reach of every one. If you will devote a few hours each week to the course WE ABSOLUTELY GUARANTEE that you will learn to draw and draw well before you have half finished the course. If we fail to make this claim good, we will refund every cent paid us. By eliminating a large office force for answering correspondence, expensive charge plan, etc. We are enabled to make a price of $2.98 the cheapest price ever known for a high grade, simple study course. Let us show it to a big asset no matter what field you are in.

Send No Money

Just write the Course and on arrival post card will bring you $2.98 plus few cents postage. Examine it right in your own home. Study it for 5 days. Then if not delighted return it and we will refund your money. Don't delay. Send today. Address

If you order the Course at once we will send you a drawing outfit containing 12 artists pencils, paper, eraser, thumb tack, etc., making you a present of this outfit.

LANDER SCHOOL OF DRAWING, Dept. 912-F Chattanooga, Tenn.

Orders from outside the U. S. A. are payable $3.25 cash with order.

ELECTRICAL ENGINEERING

A course in electrical engineering for men of limited time, complete in one year. Mathematics and mechanical drawing, shop work, high tension, internal motors, testing, practical electrical machinery, building, repairing. 28 years successful experience. Catalog on request.

BLISS ELECTRICAL SCHOOL
134 Takoma Ave., Washington, D. C.

TRI-STATE COLLEGE

DEGREE IN 3 YEARS

B.S. in C.E., Electrical, Mechanical, Chemical, Aeronautical Engineering in 3 years. Those who wish high school may make up work. Co-ed. Summer term June 18th. Catalog.

841 College Ave., Angola, Ind.

WANTED: MEN AND WOMEN

TO GO IN BUSINESS—$5000 YEARLY

FREE

Thomas A. Bliss

1917 W. Grace St. Richmond, Va.

New York Electrical School

Established 1901

Ask for free booklet

40 West 17th St., N. Y. C.

Figures Are Easy to Handle

Learn mathematics quickly! The expert in your line knows how to handle figures. Why not you? Algebra, geometry, trigonometry, and calculus are simple if you have this book to guide you!

MATHEMATICS For the Practical Man

by George Hawe, M.E.

All mathematical problems clearly explained. Send no money. Pay the postman $1.50 plus few cents postage. Money back if not satisfied.

D. VAN NOSTRAND CO., 25 6th Ave., New York.

Free

My drafting students get these drawing tools.

Write for my Job-Securing and Pay-Raising Plan today. Mailed Free.

Jobs for Draftsmen
in Great Industries—Learn at Home

Automobiles—Electricity—Motor Buses—Aviation—Building Construction. Hundreds of others. Building of stores, homes, factories and office buildings is going on all the time.

No structure can be erected without plans drawn by a draftsman. No machinery can be built without plans drawn by a draftsman.

I train you at home, in Drafting, spare time only. Keep the job you have now while learning drafting. Men I have trained are making from $2,500.00 to $5,000.00 a year.

Get started now toward a better position, paying a good straight salary, the year around. Comfortable surroundings. Inside work. Through hard times—adversity—sickness—bad luck—big bills—what can equal a job that *Lasts*! You can earn as you learn. I give you employment service. Your money back if you want it and help as long as you need it.

If You Earn Less Than **$70.00 a Week** *Write to me now for my Pay-Raising Plan.*

I'll Train You at Home.

Engineer Dobe, Div.13-64
1951 Lawrence Ave., Chicago

LearnAVIATION
WHERE LINDBERGH STARTED!

Pilots Earn Big Money!

Air mail and Transport Pilots received an average salary of $157.50 per week during the past year. Be a pilot! Learn at this Lincoln School. The best known school in America. $250,000 worth of buildings and equipment. $100,000 airport. *Government Approved School.* Big fleet government licensed training planes.

Complete Mechanics', Welders' and Radio Courses. Also Home Study Course. Mechanics' School tied in with large production aircraft factory. Reasonable tuition. Part Time Employment to help pay cost of board and room while in training. Write for details, stating age!

LINCOLN AIRPLANE & FLYING SCHOOL
317 Aircraft Bldg. Lincoln, Nebraska

EARN UP TO $250 per mo

With A Few Weeks Of Special Training At Home

Active men 19 to 45—graduates of the Standard Business Training Institute—earn up to $250 mo. and upwards—depending on ability—as Railway Traffic Inspectors. Fascinating outdoor work. Respect of high officials.

We train you at home—spare time. Give you Certificate on completion of few weeks' course—place you immediately—or refund your money. Advancement is rapid. Unusual opportunities for promotion to even higher positions.

This is the day of training for special work. Begin your preparation now in this prosperous profession. Write for Free Book and Employment Service. STANDARD BUSINESS TRAINING INSTITUTE, Inc. 304, Buffalo, N. Y.

BE A RAILWAY TRAFFIC INSPECTOR

BECOME AN EXPERT
ACCOUNTANT

Executive Accountants and C. P. A.'s earn $3,000 to $10,000 a year. Thousands of firms need them. Only 9,000 Certified Public Accountants in the United States. We train you thoroughly at home in spare time for C. P. A. examinations or executive accounting positions. Previous experience unnecessary. Training under the personal supervision of William B. Castenholz, A. M., C. P. A., and a large staff of C. P. A.'s, including members of the American Institute of Accountants. Write for free book, "Accountancy, the Profession that Pays."

LaSalle Extension University, Dept. 483-H Chicago
The World's Largest Business Training Institution

Print Your Own

Cards, Stationery, circulars, advertising etc. Save money. Print for others, big profit. Junior press, $5.90. Job press $11 up. Power $149. Easy rules sent. Write for free catalog or fill in and mail coupon. **The Kelsey Co., C-29, Meriden, Conn.** Please send me free catalog of your printing press & all details.

Name_____

Address_____

City or town
& State_____

ROBOT ELEVATORS TO SERVE 85,000

(Continued from page 45)

level and stop the car. The doors, which are opened and closed by an electric motor, are actuated simultaneously.

Not only was it necessary to provide electrical and mechanical devices to attend to the normal operation of the elevators, but devices to attend also to their safety. So much attention has been given to the question of safety that the chances of meeting with an accident in an elevator in this new installation are four or five times smaller than the chances of an accident in your automobile.

"WHAT if a cable should break?" someone asks. The answer may be surprising. The safety of the car would not be interfered with. The cables are frequently inspected, and there are six cables to support each car, though the cars in the two highest banks of the Empire State Building have *eight* cables. Should flaws pass undetected, and one, two, three, four, or even five cables break, the car would not drop, as one cable is sufficient to carry the whole load! Of course an attendant will not continue to run a car with even one cable broken. The passengers would be left off at the nearest landing, and the elevator would not be put into service again until the cable had been replaced.

The present law in New York City limits the speed of elevators to 700 feet a minute. Certain that this law will soon be changed, eighteen of the Empire State elevators are arranged for a future speed of 800 feet a minute, eighteen for 1,000 feet, and eighteen more for 1,200 feet. The latter are the fastest passenger elevators ever made.

According to Otis engineers, the speed limit with modern equipment is not determined by factors of safety but by the normal distance between stops. In a department store, where stops must be made at every floor, 500 feet a minute would be more sensible than 1,200; but where a clear jump of nearly 800 feet must be made the lower speed is ridiculous.

That the traffic may be handled with the greatest expediency, an indicating panel and a dispatching panel are adjacent to each bank of cars. On one, lights show at a glance the position of every elevator in the bank; two columns of lights of a different color indicate the floors at which buttons have been pushed by waiting passengers. On the other panel are telephone, switches, and the control of an automatic dispatching device.

Ordinarily this device signals the attendant of a car when his car is the next to leave, then gives him another signal at the precise moment he should initiate the closing of the doors. Its operation may be speeded or retarded to suit the traffic, at the will of the dispatcher, or the dispatcher may start or recall cars independent of the device, by manipulating the switches.

EACH elevator has a telephone, interconnected through an automatic 200-station switchboard with each other, with the starter, the engineer, the superintendent, and with a station on each floor.

The highest rise of any of the cars is made by Freight Elevator No. 1, which travels from the sub-basement to the eightieth floor, 986 feet. None of the cars that ascend from the lobby go higher. Two local cars provide service between the seventy-ninth and the eighty-sixth floors. It is planned to have another elevator in the mooring mast, rising to an observation platform 1,210 feet above the ground.

"Here's your check

your drawing's OK"

SOME men make more money playing than others do working. They have been far-sighted enough to turn a hobby into a real source of money. Perhaps you've always liked to take a pencil and draw little figures. Successful artists are simply men who have kept on drawing little figures, studying and practicing, until they became expert. You may have just as much ability. It costs you nothing to find out—and it may be the most valuable discovery of your life.

The Federal Schools have taught hundreds of successful students. Many are now earning from $2,500 to $6,000 a year—others even more. Many famous artists contributed to this simple, thorough home course. In spare time you can learn the things they know about commercial art, lettering, poster designing, color harmony, fashion drawing, etc. Send coupon below—get the free book, "Your Future," which tells what other Federal students have done. With it, you will receive our Free Vocational Art Test, which our artists will use to judge your ability. You may have real talent. Don't let it rust—it can bring you bigger money and an easier, happier life. Write today.

FEDERAL SCHOOL of COMMERCIAL DESIGNING

481 Federal Schools Building
Minneapolis, Minn.

Please send me Art Test and book, "Your Future."

Name_____

Age_____ Occupation_____

Address_____

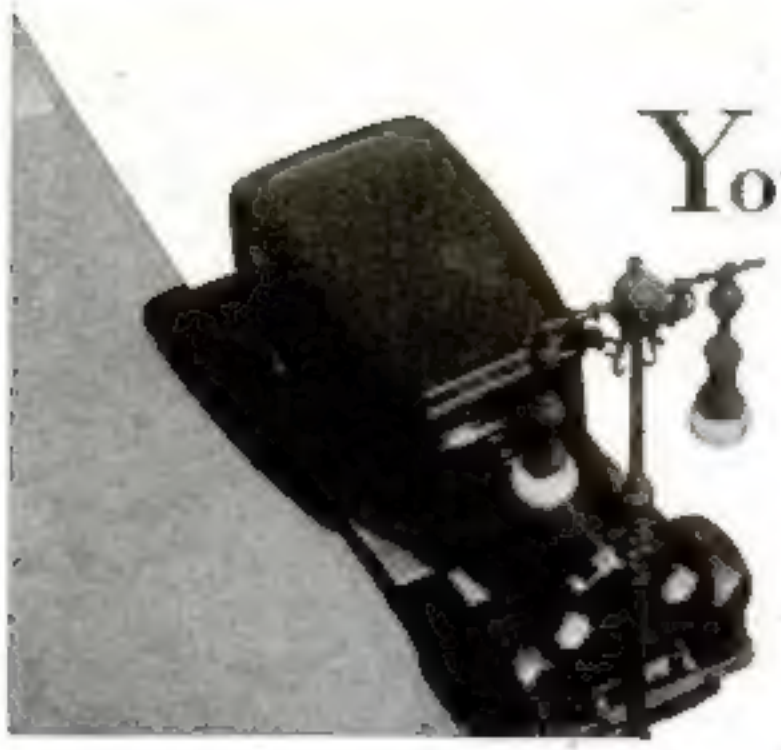

You call it an *Automobile*

But-

we call it *apparatus* in Ethyl laboratories

FROM the garage doors of the Ethyl Engineering Laboratory in Detroit—cars come and go. Stock cars, special cars; cars like the one you drive today and like the one you'll probably drive tomorrow. They are a part of the *apparatus* that engineers of the Ethyl Gasoline Corporation use in their everlasting search for fact.

During the past three years over 500 cars have been purchased, many of them worn out and destroyed by gruelling tests that tell the facts about motor fuel.

These tests prove that Ethyl Gasoline gives more power, that it takes better care of your car, that it does not "knock" and that it is admirably suited to the needs of *any* car sold today.

Tests prove that *any* good gasoline is made better by adding a few drops of Ethyl fluid; that this valuable fluid will control the combustion of *any* good gasoline so its power will be delivered in smoothly increasing pressure to the pistons, bringing out the best performance of any motor.

All Ethyl Gasoline is made from *good* gasoline. It all contains enough Ethyl fluid to *control combustion*. Try it yourself *from the pump that bears the Ethyl emblem*. You will like it. Ethyl Gasoline Corporation, Chrysler Building, New York City.

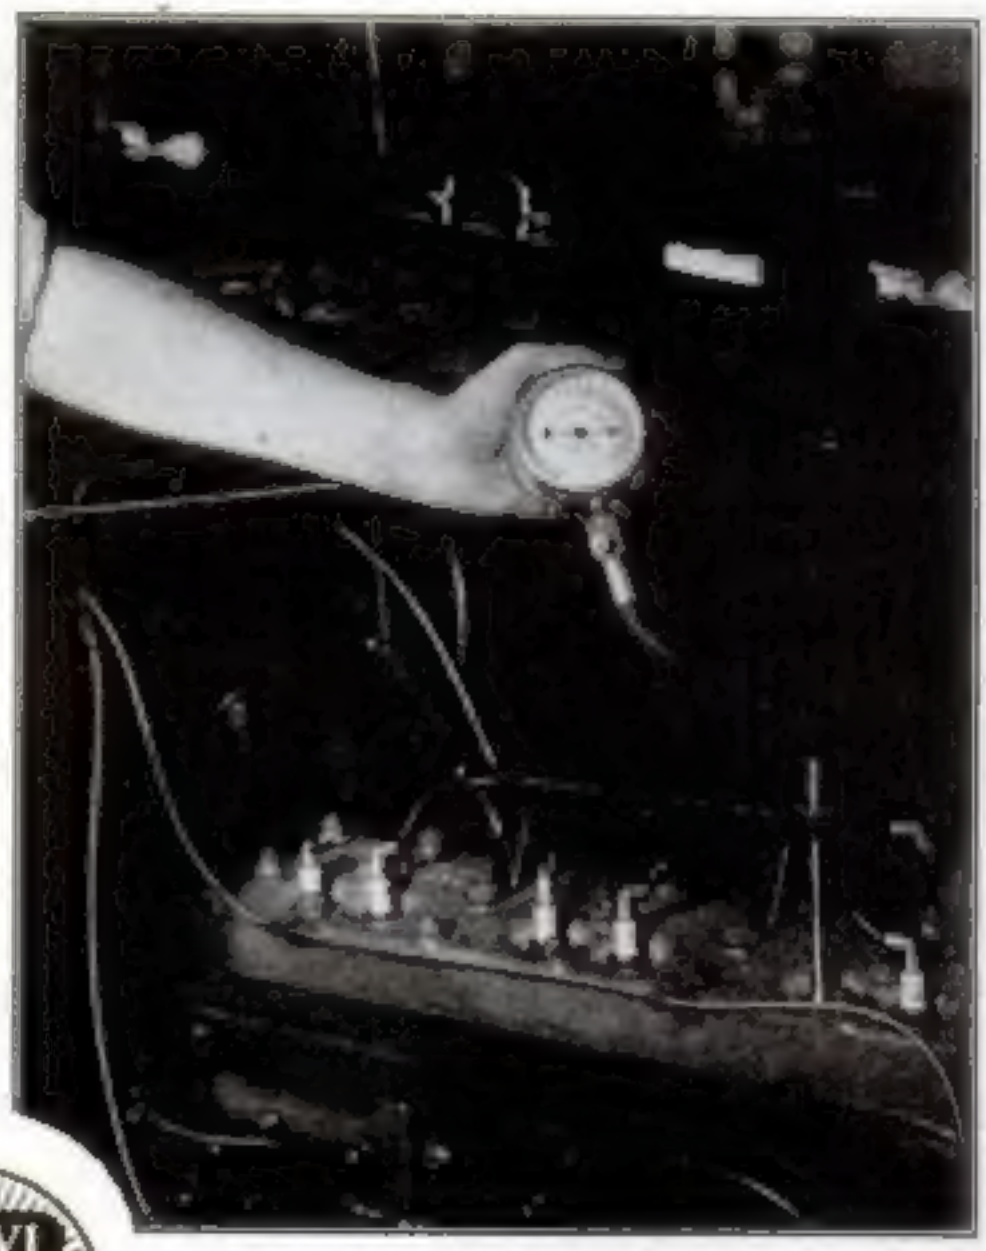

Taking the compression pressure of a stock model car with special head. 175 pounds compression is a much higher pressure than that of any car on the market, and this engine is operating satisfactorily on Ethyl Gasoline.

The active ingredient used in Ethyl fluid is lead.

ETHYL

© E. G. C. 1931

ETHYL GASOLINE

Copyrighted Material

THE BLADE WITH THE "RED END"
TUNGSTEN STEEL

THE BLADE WITH THE "RED BACK"
HIGH SPEED STEEL

SIMONDS

"RED STREAK" HACK SAWS

cut fast..easy.. and true!

When you buy Hack Saw Blades look for these brilliant RED Trade Marks:—

"RED END" for Tungsten Steel
"RED BACK" for High Speed Steel

Ask any leading hardware or supply dealer

SIMONDS SAW AND STEEL CO.
"The Hack Saw Makers"
ESTABLISHED 1838 — FITCHBURG, MASSACHUSETTS
Branches throughout the United States and Canada

This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 8.

Sunshine Mellows Heat Purifies

LUCKIES are always kind to your throat

The advice of your physician is: Keep out of doors, in the open air, breathe deeply, take plenty of exercise in the mellow sunshine, and have a periodic check-up on the health of your body.

Everyone knows that sunshine mellows—that's why the "TOASTING" process includes the use of the Ultra Violet Rays. LUCKY STRIKE—the finest cigarette you ever smoked, made of the finest tobaccos—the Cream of the Crop—THEN—"IT'S TOASTED." Everyone knows that heat purifies and so "TOASTING"—that extra, secret process—removes harmful irritants that cause throat irritation and coughing.

"It's toasted"

Your Throat Protection—against irritation—against cough

© 1931, The A. T. Co., Mfrs.